

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P313443

Luminaire Tested: **24FCZ2-30-UNV-L83050-RDP-CA08-W2A-U-4500K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

**Test Information**

Test Method: LM-79-08  
Report Number: P313443  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-19)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: 24FCZ2-30-UNV-L83050-RDP-CA08-W2A-U-4500K  
Description: 2'X4' TROFFER LED MODULE, SMOOTH LENS WITH INSERT, 0.08" ACRYLIC SHEET  
Light Source: (168) 4500K TUNABLE CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER  
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1977.0 lumens  
Efficiency: N/A  
Efficacy: 80.7 lumens/watt  
Spacing Criteria (0/90/45): 1.26 / 1.3 / 1.41  
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')  
CIE Type: Direct


Input Watts (W): 24.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P313443

CATALOG NUMBER: 24FCZ2-30-UNV-L83050-RDP-CA08-W2A-U-4500K

### Luminous Intensity Polar Plot

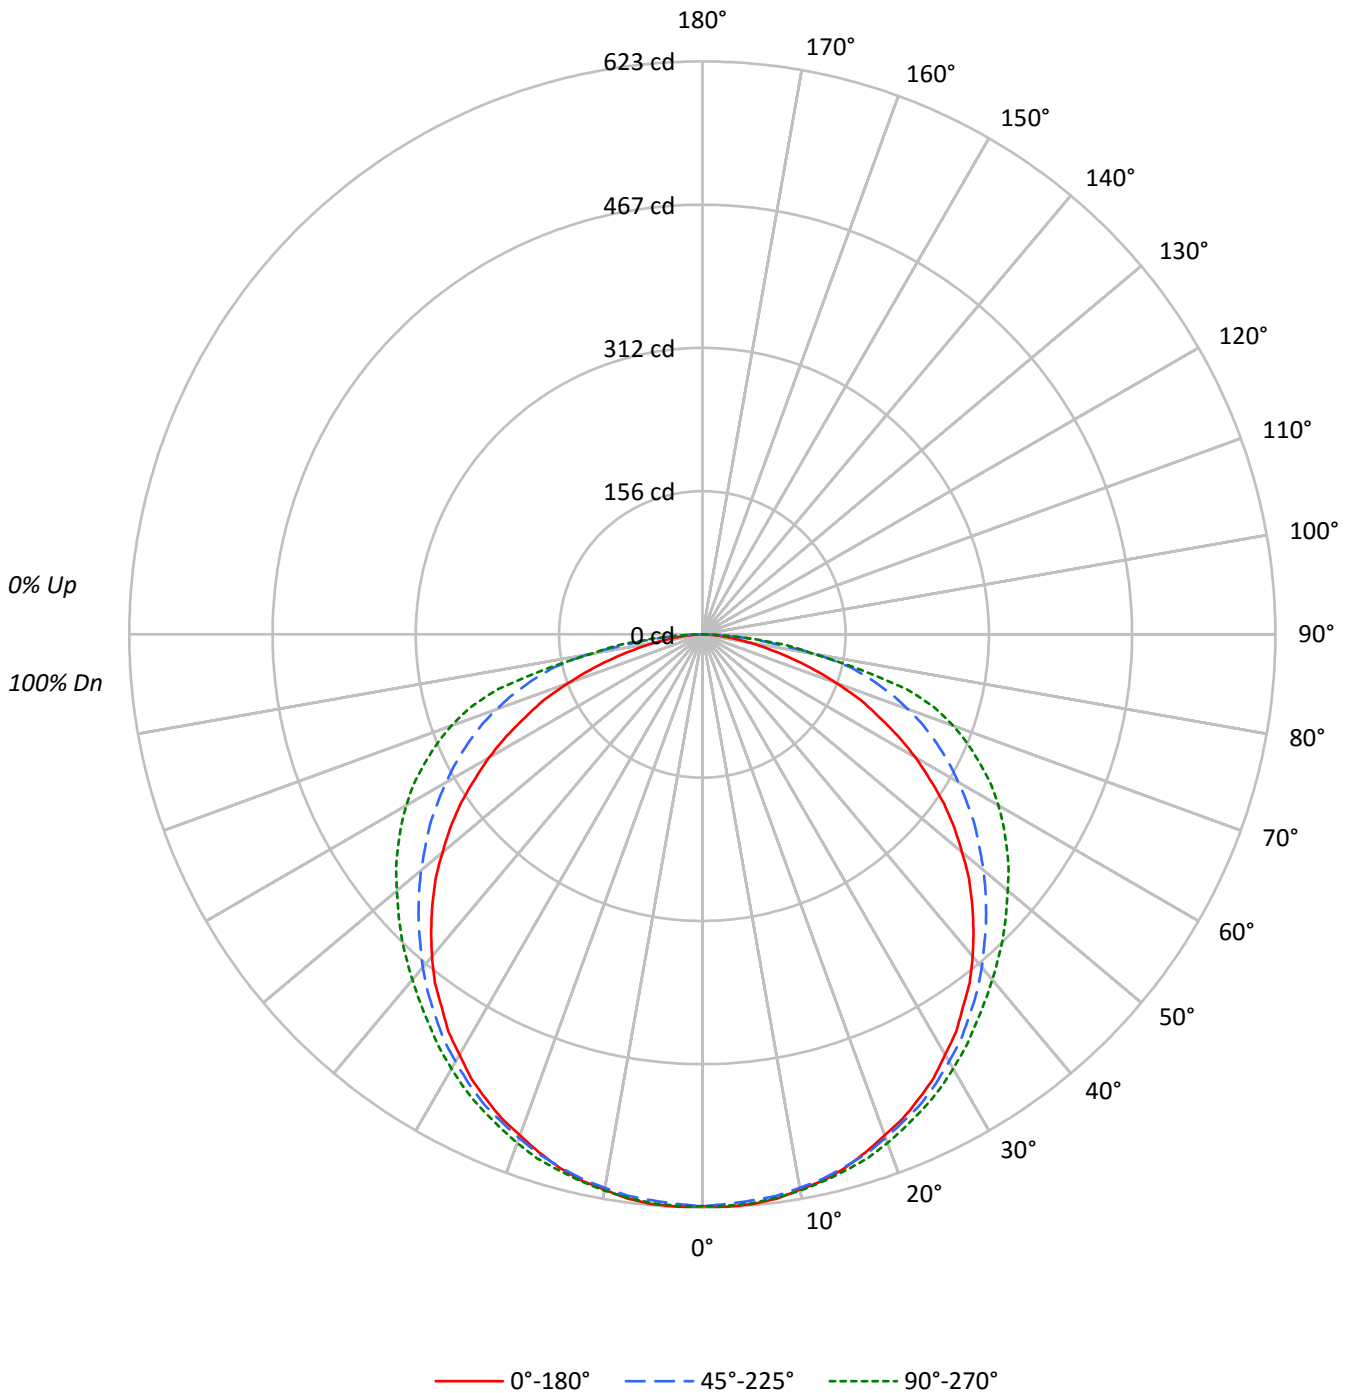



TEST NUMBER: P313443

CATALOG NUMBER: 24FCZ2-30-UNV-L83050-RDP-CA08-W2A-U-4500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	100	96	92	96	93	89	92	89	87	88	86	84	82
2	97	89	81	75	95	87	80	74	83	77	72	80	75	71	77	73	69	67
3	88	77	68	62	86	76	68	61	72	66	60	70	64	59	67	62	58	56
4	81	68	59	52	78	67	58	51	64	57	51	62	55	50	59	54	49	47
5	74	60	51	44	72	59	51	44	57	49	43	55	48	43	53	47	42	40
6	68	54	45	38	66	53	45	38	51	44	38	50	43	37	48	42	37	35
7	63	49	40	34	61	48	40	34	47	39	33	45	38	33	44	38	33	31
8	59	45	36	30	57	44	36	30	43	35	30	41	34	29	40	34	29	27
9	55	41	33	27	53	40	32	27	39	32	27	38	31	26	37	31	26	24
10	51	38	30	24	50	37	29	24	36	29	24	35	29	24	34	28	24	22

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	836	836	836
5°	840	834	838
10°	837	835	839
15°	836	835	840
20°	830	834	842
25°	827	836	844
30°	820	833	847
35°	812	831	851
40°	803	830	861
45°	789	830	881
50°	772	835	907
55°	752	849	948
60°	720	865	1000
65°	674	896	1061
70°	613	937	1142
75°	520	989	1193
80°	411	996	965
85°	303	756	848



TEST NUMBER: P313443

CATALOG NUMBER: 24FCZ2-30-UNV-L83050-RDP-CA08-W2A-U-4500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	59.0	3.0
10°-20°	169.7	8.6
20°-30°	259.6	13.1
30°-40°	317.3	16.0
40°-50°	338.2	17.1
50°-60°	323.3	16.4
60°-70°	273.9	13.9
70°-80°	184.1	9.3
80°-90°	51.9	2.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	488.3	24.7
0°-40°	805.6	40.7
0°-60°	1467.1	74.2
0°-90°	1977.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1977.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	622	622	622	622	622	
5°	622	621	618	621	621	59
15°	600	600	599	604	603	169
25°	557	559	563	568	569	257
35°	494	498	506	516	518	310
45°	415	422	436	455	463	320
55°	321	332	362	390	404	286
65°	212	233	281	319	333	210
75°	100	136	190	223	230	107
85°	20	40	49	53	55	24
90°	0	0	0	0	0	



TEST NUMBER: P313443

CATALOG NUMBER: 24FCZ2-30-UNV-L83050-RDP-CA08-W2A-U-4500K

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	621.7	621.7	621.7	621.7	621.7
2.5°	622.7	622.7	619.7	621.7	621.7
5°	621.7	620.7	617.8	620.7	620.7
7.5°	618.8	617.8	615.8	618.8	617.8
10°	612.9	612.9	610.9	613.9	613.9
12.5°	608.0	607.0	606.0	609.9	609.0
15°	600.1	600.1	599.2	604.1	603.1
17.5°	590.3	591.3	592.3	596.2	597.2
20°	579.5	581.5	582.5	588.4	588.4
22.5°	569.7	570.7	572.7	578.6	578.6
25°	557.0	559.0	562.9	567.8	568.8
27.5°	544.2	545.2	550.1	557.0	558.0
30°	527.6	530.5	536.4	544.2	545.2
32.5°	512.9	515.8	522.7	530.5	532.5
35°	494.2	498.2	506.0	515.8	517.8
37.5°	477.6	480.5	490.3	501.1	504.0
40°	457.0	462.9	472.7	485.4	490.3
42.5°	436.4	442.3	454.0	470.7	476.6
45°	414.8	421.7	436.4	455.0	462.9
47.5°	393.2	401.1	417.7	439.3	448.1
50°	368.7	378.5	399.1	423.6	433.4
52.5°	345.2	356.9	379.5	407.0	419.7
55°	320.7	332.4	361.8	390.3	404.0
57.5°	293.2	308.9	341.3	373.6	388.3
60°	267.7	282.4	321.6	356.9	371.7
62.5°	240.3	259.9	302.0	339.3	354.0
65°	211.8	233.4	281.4	318.7	333.4
67.5°	186.3	209.9	260.8	298.1	312.8
70°	155.9	185.3	238.3	275.6	290.3
72.5°	127.5	159.8	214.8	251.0	264.8
75°	100.0	136.3	190.2	222.6	229.5
77.5°	74.5	112.8	164.7	178.5	173.6
80°	53.0	90.2	128.5	121.6	124.5
82.5°	34.3	68.6	79.4	90.2	93.2
85°	19.6	40.2	49.0	53.0	54.9
87.5°	8.8	14.7	19.6	19.6	18.6
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)