

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P313428

Luminaire Tested: **24FCZ2-30HE-UNV-L83050-RDP-CP125-W2A-U-4500K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

**Test Information**

Test Method: LM-79-08  
Report Number: P313428  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-19)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: 24FCZ2-30HE-UNV-L83050-RDP-CP125-W2A-U-4500K  
Description: 2'X4' TROFFER LED MODULE, SMOOTH LENS WITH INSERT, 0.125" POLYCARB SHEET  
Light Source: (336) 4500K TUNABLE CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER  
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1955.0 lumens  
Efficiency: N/A  
Efficacy: 88.5 lumens/watt  
Spacing Criteria (0/90/45): 1.26 / 1.3 / 1.41  
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 22.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P313428

CATALOG NUMBER: 24FCZ2-30HE-UNV-L83050-RDP-CP125-W2A-U-4500K

### Luminous Intensity Polar Plot

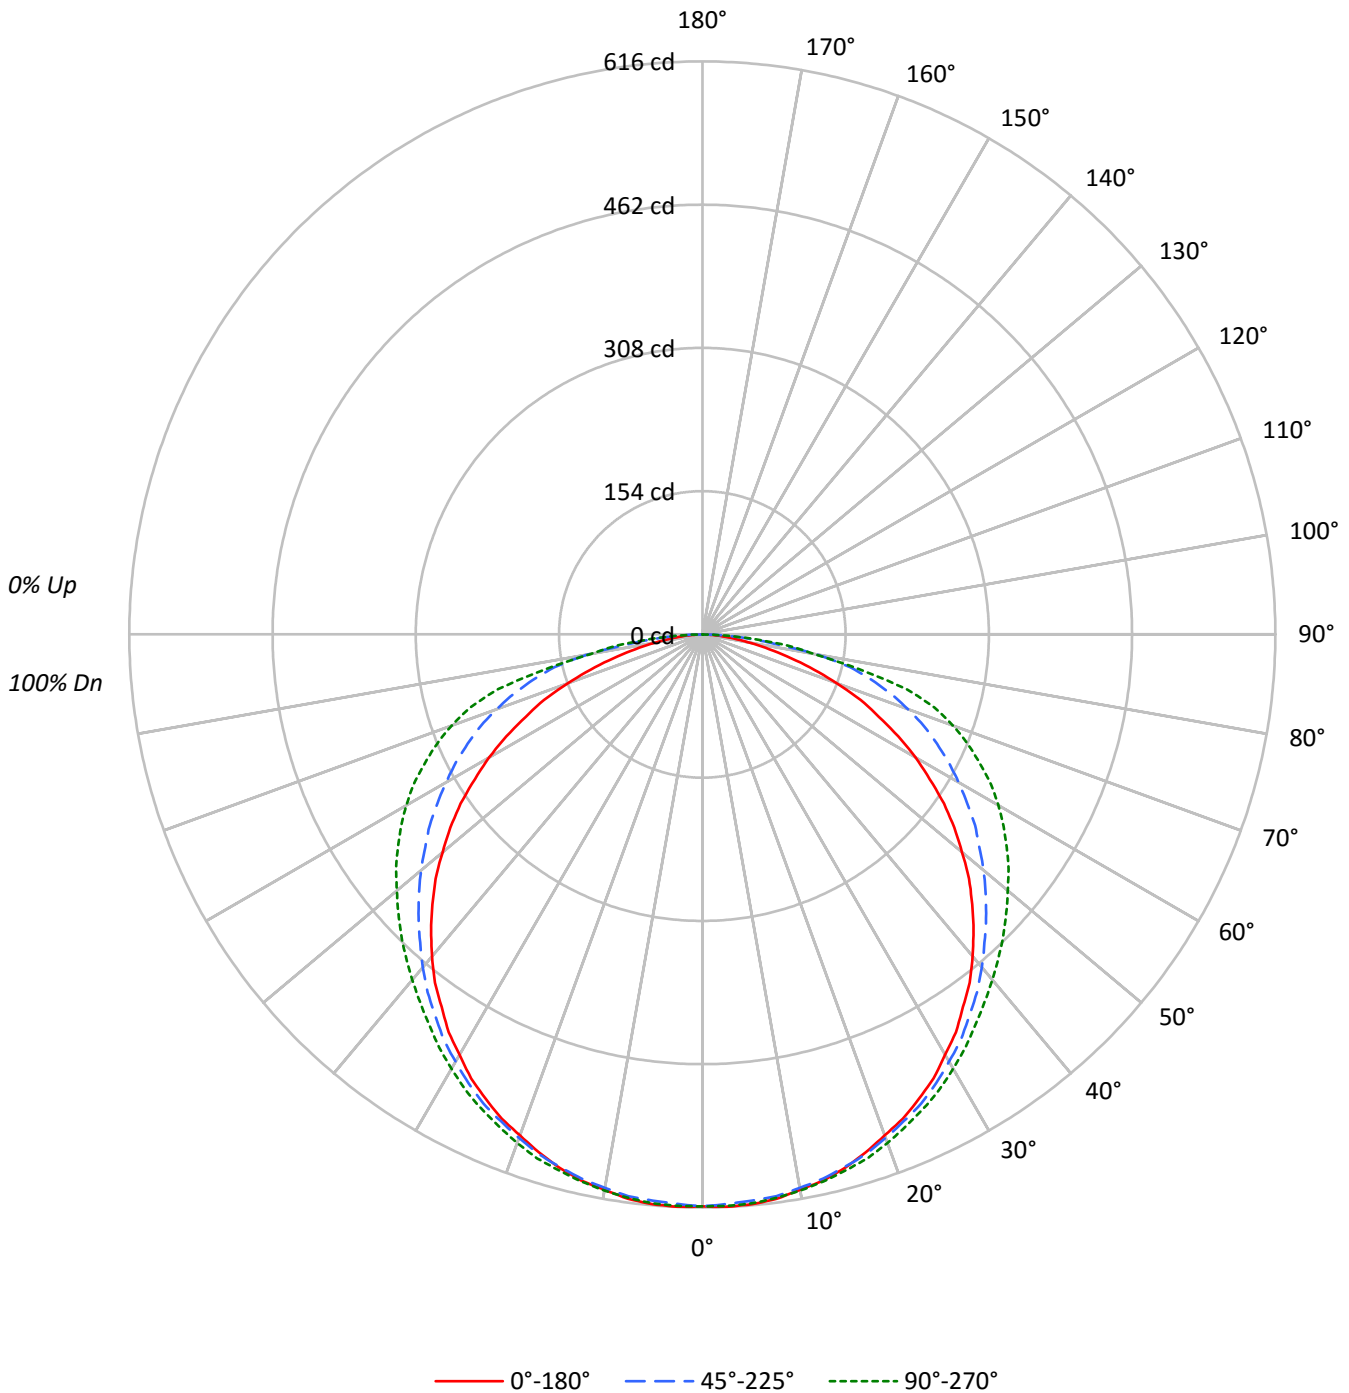



TEST NUMBER: P313428

CATALOG NUMBER: 24FCZ2-30HE-UNV-L83050-RDP-CP125-W2A-U-4500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	100	96	92	96	93	89	92	89	87	88	86	84	82
2	97	89	81	75	95	87	80	74	83	77	72	80	75	71	77	73	69	67
3	88	77	68	62	86	76	68	61	72	66	60	70	64	59	67	62	58	56
4	81	68	59	52	78	67	58	51	64	57	51	62	55	50	59	54	49	47
5	74	60	51	44	72	59	51	44	57	49	43	55	48	43	53	47	42	40
6	68	54	45	38	66	53	45	38	51	44	38	50	43	37	48	42	37	35
7	63	49	40	34	61	48	40	34	47	39	33	45	38	33	44	38	33	31
8	59	45	36	30	57	44	36	30	43	35	30	41	34	29	40	34	29	27
9	55	41	33	27	53	40	32	27	39	32	27	38	31	26	37	31	26	24
10	51	38	30	24	50	37	29	24	36	29	24	35	29	24	34	28	24	22

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	827	827	827
5°	830	825	829
10°	828	825	829
15°	827	825	831
20°	821	825	833
25°	818	826	835
30°	811	824	838
35°	803	822	841
40°	794	821	852
45°	781	821	871
50°	763	826	897
55°	744	839	937
60°	712	856	989
65°	667	886	1050
70°	607	927	1129
75°	514	978	1180
80°	406	984	955
85°	299	749	838



TEST NUMBER: P313428

CATALOG NUMBER: 24FCZ2-30HE-UNV-L83050-RDP-CP125-W2A-U-4500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	58.3	3.0
10°-20°	167.8	8.6
20°-30°	256.7	13.1
30°-40°	313.8	16.0
40°-50°	334.4	17.1
50°-60°	319.7	16.4
60°-70°	270.9	13.9
70°-80°	182.0	9.3
80°-90°	51.3	2.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	482.8	24.7
0°-40°	796.6	40.7
0°-60°	1450.8	74.2
0°-90°	1955.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1955.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	615	615	615	615	615	
5°	615	614	611	614	614	58
15°	594	594	592	597	596	167
25°	551	553	557	562	562	254
35°	489	493	500	510	512	306
45°	410	417	432	450	458	316
55°	317	329	358	386	400	282
65°	210	231	278	315	330	208
75°	99	135	188	220	227	106
85°	19	40	48	52	54	24
90°	0	0	0	0	0	



TEST NUMBER: P313428

CATALOG NUMBER: 24FCZ2-30HE-UNV-L83050-RDP-CP125-W2A-U-4500K

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	614.8	614.8	614.8	614.8	614.8
2.5°	615.8	615.8	612.9	614.8	614.8
5°	614.8	613.8	610.9	613.8	613.8
7.5°	611.9	610.9	609.0	611.9	610.9
10°	606.1	606.1	604.1	607.0	607.0
12.5°	601.2	600.2	599.3	603.2	602.2
15°	593.5	593.5	592.5	597.3	596.4
17.5°	583.8	584.7	585.7	589.6	590.5
20°	573.1	575.0	576.0	581.8	581.8
22.5°	563.4	564.4	566.3	572.1	572.1
25°	550.8	552.7	556.6	561.5	562.4
27.5°	538.2	539.2	544.0	550.8	551.8
30°	521.7	524.6	530.4	538.2	539.2
32.5°	507.2	510.1	516.9	524.6	526.5
35°	488.7	492.6	500.4	510.1	512.0
37.5°	472.2	475.2	484.9	495.5	498.4
40°	451.9	457.7	467.4	480.0	484.9
42.5°	431.5	437.3	449.0	465.5	471.3
45°	410.2	417.0	431.5	449.9	457.7
47.5°	388.9	396.6	413.1	434.4	443.2
50°	364.6	374.3	394.7	418.9	428.6
52.5°	341.3	353.0	375.3	402.4	415.0
55°	317.1	328.7	357.8	385.9	399.5
57.5°	289.9	305.5	337.5	369.5	384.0
60°	264.7	279.3	318.1	353.0	367.5
62.5°	237.6	257.0	298.7	335.5	350.1
65°	209.5	230.8	278.3	315.2	329.7
67.5°	184.2	207.5	257.9	294.8	309.3
70°	154.2	183.3	235.6	272.5	287.0
72.5°	126.1	158.1	212.4	248.2	261.8
75°	98.9	134.8	188.1	220.1	226.9
77.5°	73.7	111.5	162.9	176.5	171.6
80°	52.4	89.2	127.0	120.2	123.2
82.5°	33.9	67.9	78.5	89.2	92.1
85°	19.4	39.8	48.5	52.4	54.3
87.5°	8.7	14.5	19.4	19.4	18.4
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)