

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P313492

Luminaire Tested: **24FCZ2-35-UNV-L83050-RDP-CA08-W2A-U-4000K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

**Test Information**

Test Method: LM-79-08  
Report Number: P313492  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-19)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: 24FCZ2-35-UNV-L83050-RDP-CA08-W2A-U-4000K  
Description: 2'X4' TROFFER LED MODULE, SMOOTH LENS WITH INSERT, 0.08" ACRYLIC SHEET  
Light Source: (168) 4000K TUNABLE CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER  
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2297.0 lumens  
Efficiency: N/A  
Efficacy: 80.3 lumens/watt  
Spacing Criteria (0/90/45): 1.26 / 1.3 / 1.41  
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 28.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P313492

CATALOG NUMBER: 24FCZ2-35-UNV-L83050-RDP-CA08-W2A-U-4000K

### Luminous Intensity Polar Plot

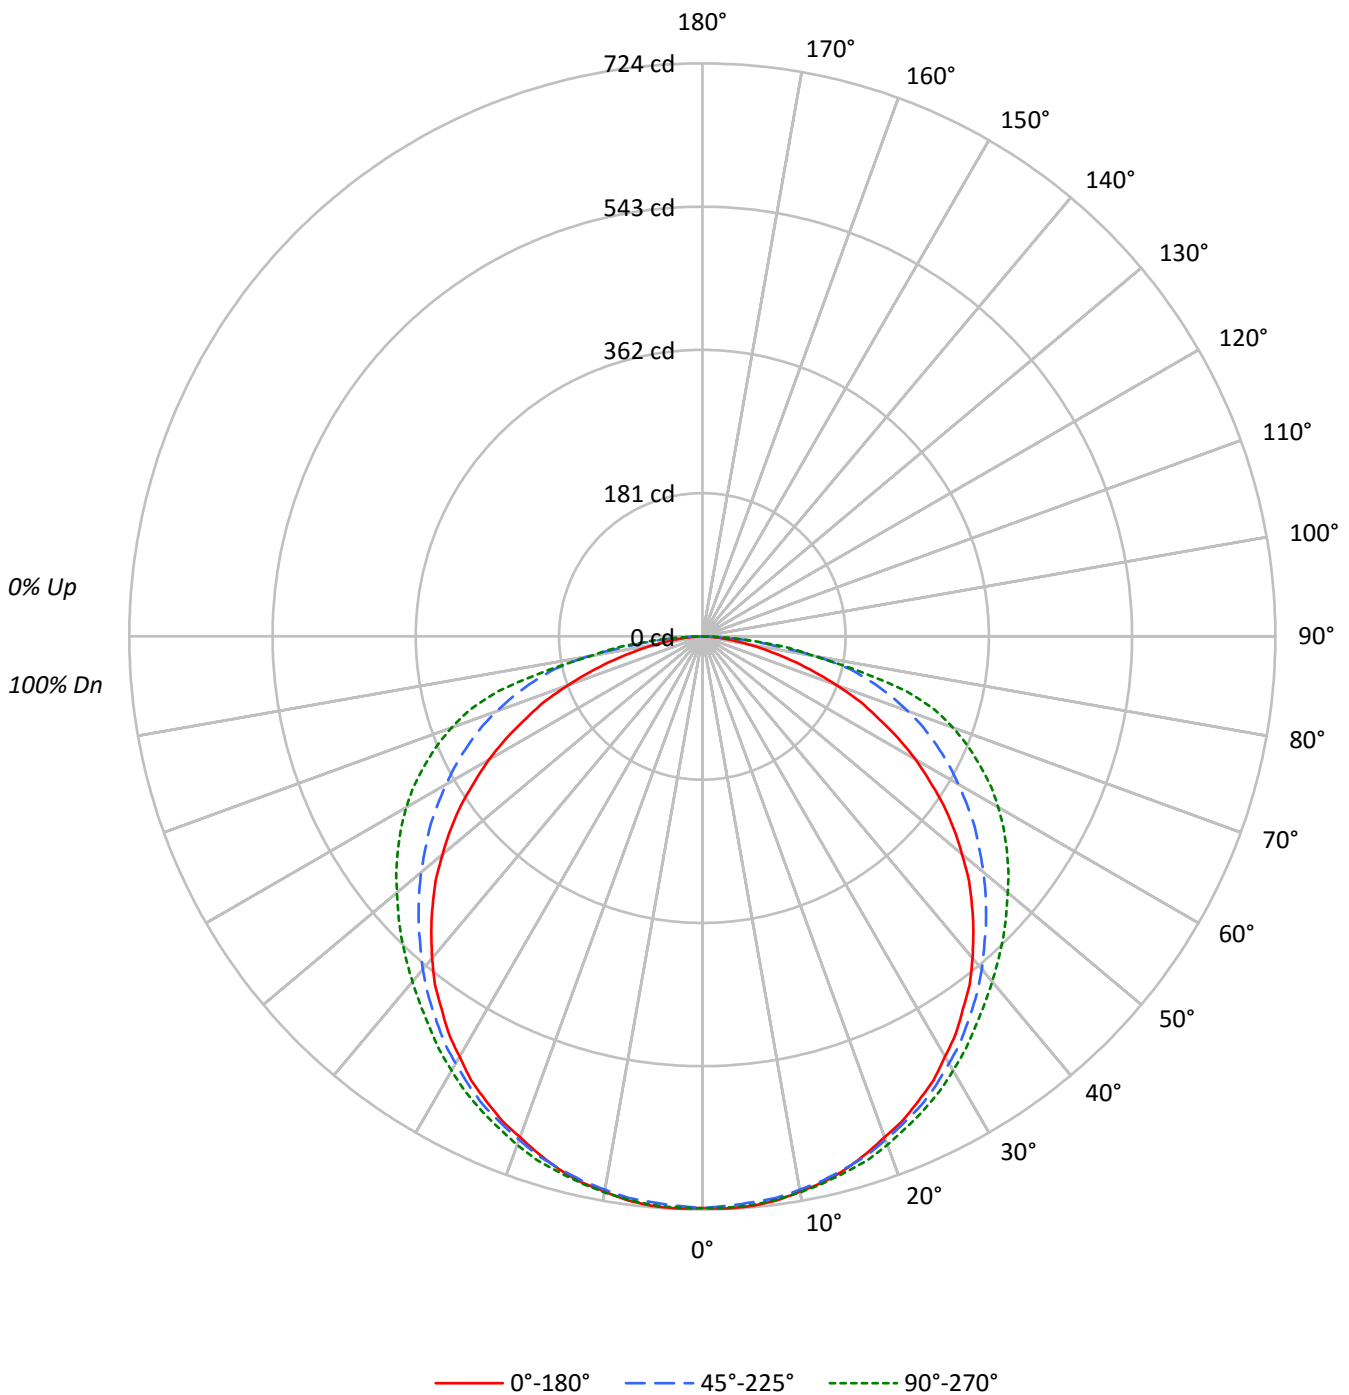



TEST NUMBER: P313492

CATALOG NUMBER: 24FCZ2-35-UNV-L83050-RDP-CA08-W2A-U-4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	100	96	92	96	93	89	92	89	87	88	86	84	82
2	97	89	81	75	95	87	80	74	83	77	72	80	75	71	77	73	69	67
3	88	77	68	62	86	76	67	61	72	66	60	70	64	59	67	62	58	56
4	81	68	59	52	78	67	58	51	64	57	51	62	55	50	59	54	49	47
5	74	60	51	44	72	59	51	44	57	49	43	55	48	43	53	47	42	40
6	68	54	45	38	66	53	45	38	51	44	38	50	43	37	48	42	37	35
7	63	49	40	34	61	48	40	34	47	39	33	45	38	33	44	38	33	31
8	59	45	36	30	57	44	36	30	43	35	30	41	34	29	40	34	29	27
9	55	41	33	27	53	40	32	27	39	32	27	38	31	26	37	31	26	24
10	51	38	30	24	50	37	29	24	36	29	24	35	29	24	34	28	24	22

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	972	972	972
5°	976	969	974
10°	973	970	974
15°	971	970	976
20°	964	969	979
25°	961	971	981
30°	952	968	984
35°	943	966	988
40°	932	965	1001
45°	917	965	1023
50°	897	971	1054
55°	874	986	1101
60°	837	1006	1162
65°	784	1041	1233
70°	713	1089	1327
75°	604	1149	1386
80°	477	1157	1121
85°	352	880	985



TEST NUMBER: P313492

CATALOG NUMBER: 24FCZ2-35-UNV-L83050-RDP-CA08-W2A-U-4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	68.5	3.0
10°-20°	197.2	8.6
20°-30°	301.6	13.1
30°-40°	368.7	16.0
40°-50°	392.9	17.1
50°-60°	375.7	16.4
60°-70°	318.2	13.9
70°-80°	213.9	9.3
80°-90°	60.3	2.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	567.3	24.7
0°-40°	936.0	40.7
0°-60°	1704.5	74.2
0°-90°	2297.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2297.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	722	722	722	722	722	
5°	722	721	718	721	721	69
15°	697	697	696	702	701	197
25°	647	649	654	660	661	298
35°	574	579	588	599	602	360
45°	482	490	507	529	538	372
55°	373	386	420	454	469	332
65°	246	271	327	370	387	244
75°	116	158	221	259	267	124
85°	23	47	57	62	64	28
90°	0	0	0	0	0	



TEST NUMBER: P313492

CATALOG NUMBER: 24FCZ2-35-UNV-L83050-RDP-CA08-W2A-U-4000K

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	722.3	722.3	722.3	722.3	722.3
2.5°	723.5	723.5	720.1	722.3	722.3
5°	722.3	721.2	717.8	721.2	721.2
7.5°	718.9	717.8	715.5	718.9	717.8
10°	712.1	712.1	709.8	713.2	713.2
12.5°	706.4	705.3	704.1	708.7	707.5
15°	697.3	697.3	696.1	701.8	700.7
17.5°	685.9	687.0	688.2	692.7	693.9
20°	673.3	675.6	676.8	683.6	683.6
22.5°	662.0	663.1	665.4	672.2	672.2
25°	647.1	649.4	654.0	659.7	660.8
27.5°	632.3	633.5	639.2	647.1	648.3
30°	613.0	616.4	623.2	632.3	633.5
32.5°	595.9	599.3	607.3	616.4	618.7
35°	574.2	578.8	587.9	599.3	601.6
37.5°	554.9	558.3	569.7	582.2	585.6
40°	530.9	537.8	549.2	564.0	569.7
42.5°	507.0	513.8	527.5	546.9	553.7
45°	481.9	489.9	507.0	528.7	537.8
47.5°	456.9	466.0	485.4	510.4	520.7
50°	428.4	439.8	463.7	492.2	503.6
52.5°	401.0	414.7	440.9	472.8	487.6
55°	372.6	386.2	420.4	453.5	469.4
57.5°	340.7	358.9	396.5	434.1	451.2
60°	311.0	328.1	373.7	414.7	431.8
62.5°	279.1	301.9	350.9	394.2	411.3
65°	246.1	271.2	327.0	370.3	387.4
67.5°	216.5	243.8	303.1	346.4	363.4
70°	181.2	215.3	276.9	320.2	337.2
72.5°	148.1	185.7	249.5	291.7	307.6
75°	116.2	158.4	221.0	258.6	266.6
77.5°	86.6	131.0	191.4	207.4	201.7
80°	61.5	104.8	149.3	141.3	144.7
82.5°	39.9	79.8	92.3	104.8	108.2
85°	22.8	46.7	57.0	61.5	63.8
87.5°	10.3	17.1	22.8	22.8	21.6
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)