

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: FAIL-SAFE

Report Number: P313522

Luminaire Tested: **24FCZ2-40HE-UNV-L83050-RDP-CA125-W2A-U-4000K**

Issue Date: 3/3/2020

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.

**Test Information**

Test Method: LM-79-08  
Report Number: P313522  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1808-918-19)  
Test Lab: INNOVATION CENTER(G3)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: FAIL-SAFE  
Catalog Number: 24FCZ2-40HE-UNV-L83050-RDP-CA125-W2A-U-4000K  
Description: 2'X4' TROFFER LED MODULE, SMOOTH LENS WITH INSERT, 0.125" ACRYLIC SHEET  
Light Source: (336) 4000K TUNABLE CCT, 80 CRI LEDS  
Ballast/Driver: ELECTRONIC DRIVER  
Luminaire Equipment:

<u>Sample No.</u>	<u>Condition</u>	<u>Description</u>
AS-5443-1	Good	WHITE TWIN R-EVOLVE FLOOD
AS-5443-2	Good	REFLECTOR
AS-5443-3	Good	DRIVER
AS-5443-4	Good	UPPER MODULE
AS-5443-5	Good	LENS
AS-5443-6	Good	DRIVER 2
AS-5443-7	Good	TRIM RING

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2620.0 lumens  
Efficiency: N/A  
Efficacy: 84.2 lumens/watt  
Spacing Criteria (0/90/45): 1.26 / 1.3 / 1.41  
Luminous Opening: Rectangular (W 2' x L: 4' x H: 0')  
CIE Type: Direct


Input Watts (W): 31.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P313522

CATALOG NUMBER: 24FCZ2-40HE-UNV-L83050-RDP-CA125-W2A-U-4000K

### Luminous Intensity Polar Plot

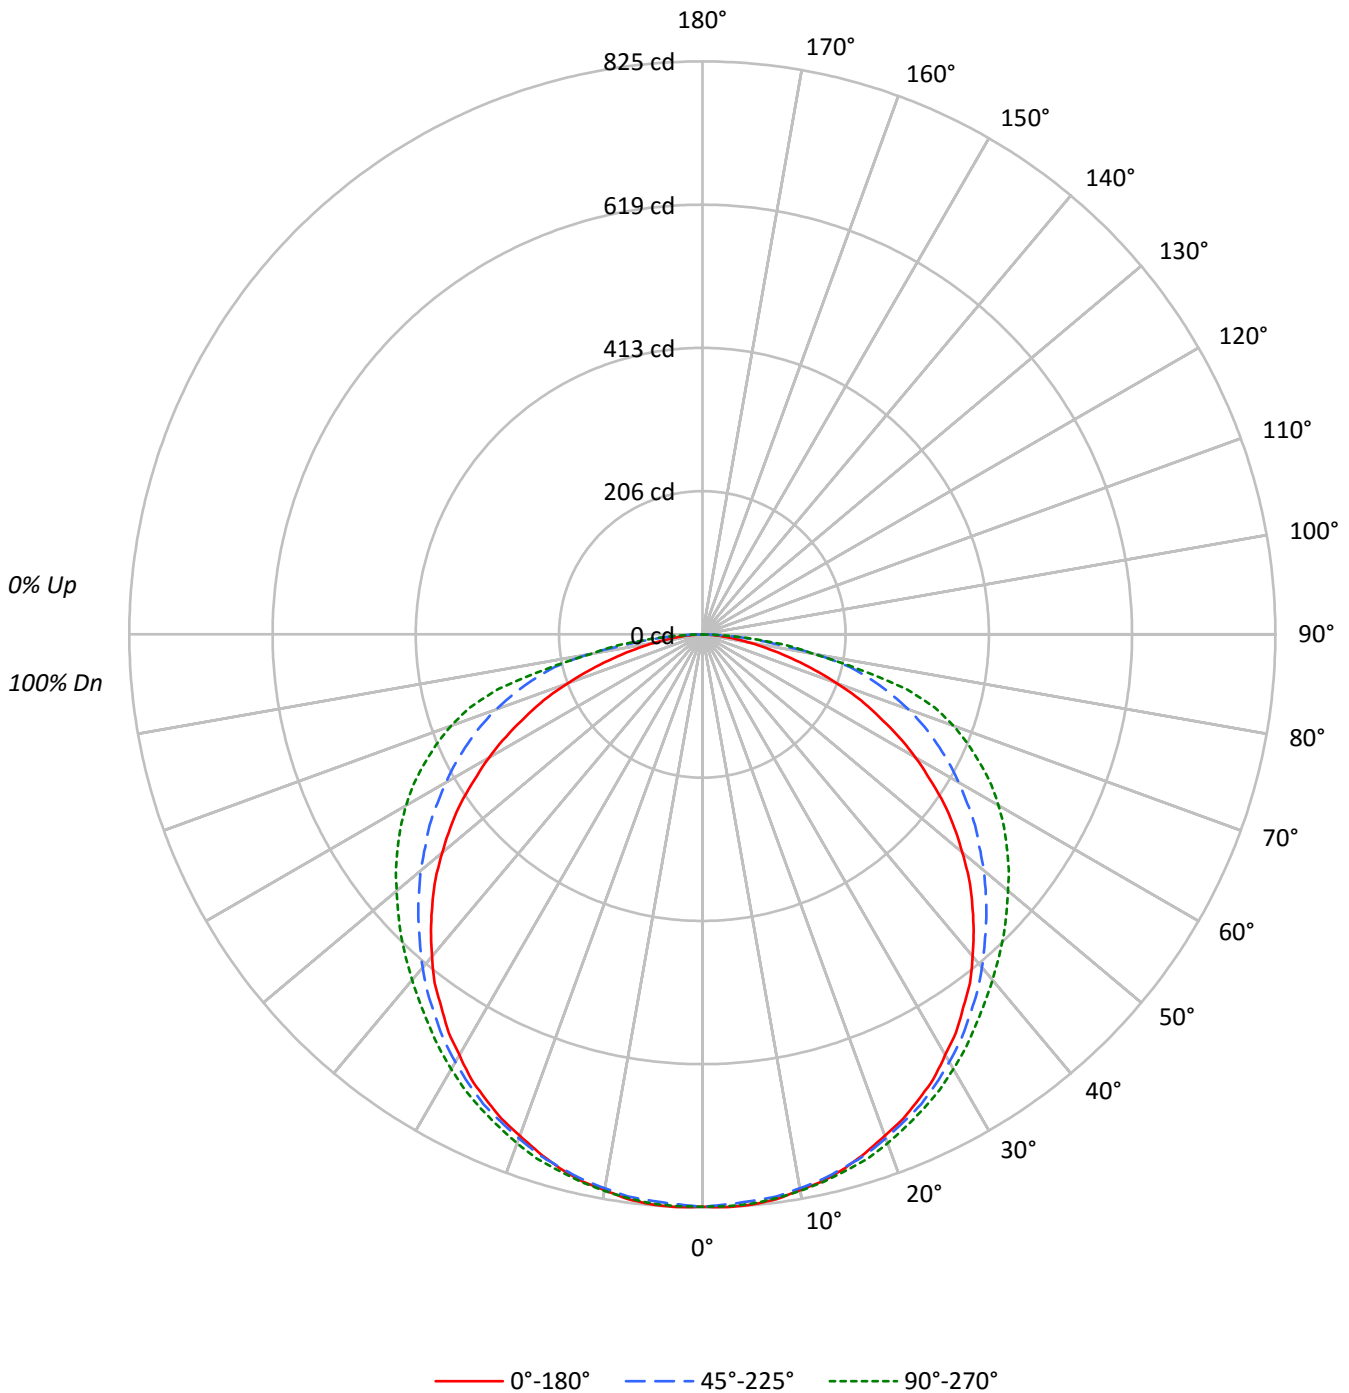



TEST NUMBER: P313522

CATALOG NUMBER: 24FCZ2-40HE-UNV-L83050-RDP-CA125-W2A-U-4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	98	94	105	100	96	92	96	93	89	92	89	87	88	86	84	82
2	97	89	81	75	95	87	80	74	83	77	72	80	75	71	77	73	69	67
3	88	77	68	62	86	76	67	61	72	66	60	70	64	59	67	62	58	56
4	81	68	59	52	78	67	58	51	64	57	51	62	55	50	59	54	49	47
5	74	60	51	44	72	59	51	44	57	49	43	55	48	43	53	47	42	40
6	68	54	45	38	66	53	45	38	51	44	38	50	43	37	48	42	37	35
7	63	49	40	34	61	48	40	34	47	39	33	45	38	33	44	38	33	31
8	59	45	36	30	57	44	36	30	43	35	30	41	34	29	40	34	29	27
9	55	41	33	27	53	40	32	27	39	32	27	38	31	26	37	31	26	24
10	51	38	30	24	50	37	29	24	36	29	24	35	29	24	34	28	24	22

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1109	1109	1109
5°	1113	1106	1111
10°	1110	1106	1111
15°	1108	1106	1113
20°	1100	1105	1116
25°	1096	1107	1119
30°	1086	1104	1123
35°	1076	1101	1127
40°	1064	1100	1141
45°	1046	1100	1167
50°	1023	1107	1202
55°	997	1125	1256
60°	955	1147	1325
65°	894	1188	1407
70°	813	1242	1513
75°	689	1311	1581
80°	544	1319	1278
85°	401	1003	1124



TEST NUMBER: P313522

CATALOG NUMBER: 24FCZ2-40HE-UNV-L83050-RDP-CA125-W2A-U-4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	78.2	3.0
10°-20°	224.9	8.6
20°-30°	344.0	13.1
30°-40°	420.5	16.1
40°-50°	448.2	17.1
50°-60°	428.5	16.4
60°-70°	363.0	13.9
70°-80°	244.0	9.3
80°-90°	68.8	2.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	647.0	24.7
0°-40°	1067.6	40.7
0°-60°	1944.2	74.2
0°-90°	2620.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2620.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	824	824	824	824	824	
5°	824	823	819	823	823	78
15°	795	795	794	800	799	224
25°	738	741	746	752	754	340
35°	655	660	671	684	686	410
45°	550	559	578	603	613	424
55°	425	440	480	517	535	378
65°	281	309	373	422	442	279
75°	133	181	252	295	304	142
85°	26	53	65	70	73	32
90°	0	0	0	0	0	



TEST NUMBER: P313522

CATALOG NUMBER: 24FCZ2-40HE-UNV-L83050-RDP-CA125-W2A-U-4000K

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	823.9	823.9	823.9	823.9	823.9
2.5°	825.2	825.2	821.3	823.9	823.9
5°	823.9	822.6	818.7	822.6	822.6
7.5°	820.0	818.7	816.1	820.0	818.7
10°	812.2	812.2	809.6	813.5	813.5
12.5°	805.7	804.4	803.1	808.3	807.0
15°	795.3	795.3	794.0	800.5	799.2
17.5°	782.3	783.6	784.9	790.1	791.4
20°	768.0	770.6	771.9	779.7	779.7
22.5°	755.0	756.3	758.9	766.7	766.7
25°	738.1	740.7	745.9	752.4	753.7
27.5°	721.3	722.6	729.0	738.1	739.4
30°	699.2	703.1	710.9	721.3	722.6
32.5°	679.7	683.6	692.7	703.1	705.7
35°	655.0	660.2	670.6	683.6	686.2
37.5°	632.9	636.8	649.8	664.1	668.0
40°	605.6	613.4	626.4	643.3	649.8
42.5°	578.3	586.1	601.7	623.8	631.6
45°	549.7	558.8	578.3	603.0	613.4
47.5°	521.1	531.5	553.6	582.2	593.9
50°	488.6	501.6	528.9	561.4	574.4
52.5°	457.4	473.0	502.9	539.3	556.2
55°	425.0	440.5	479.5	517.2	535.4
57.5°	388.6	409.4	452.2	495.1	514.6
60°	354.8	374.3	426.3	473.0	492.5
62.5°	318.4	344.4	400.3	449.6	469.1
65°	280.7	309.3	373.0	422.4	441.8
67.5°	246.9	278.1	345.7	395.1	414.6
70°	206.6	245.6	315.8	365.2	384.7
72.5°	168.9	211.8	284.6	332.7	350.9
75°	132.6	180.6	252.1	295.0	304.1
77.5°	98.8	149.4	218.3	236.5	230.0
80°	70.2	119.6	170.2	161.1	165.0
82.5°	45.5	91.0	105.3	119.6	123.5
85°	26.0	53.3	65.0	70.2	72.8
87.5°	11.7	19.5	26.0	26.0	24.7
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)