

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P579686

Luminaire Tested: **HC410D010-HM40525827-41MDH**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P579686
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC410D010-HM40525827-41MDH
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 961.3 lumens
Efficiency: N/A
Efficacy: 97.1 lumens/watt
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.91
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P579686

CATALOG NUMBER: HC410D010-HM40525827-41MDH

Luminous Intensity Polar Plot

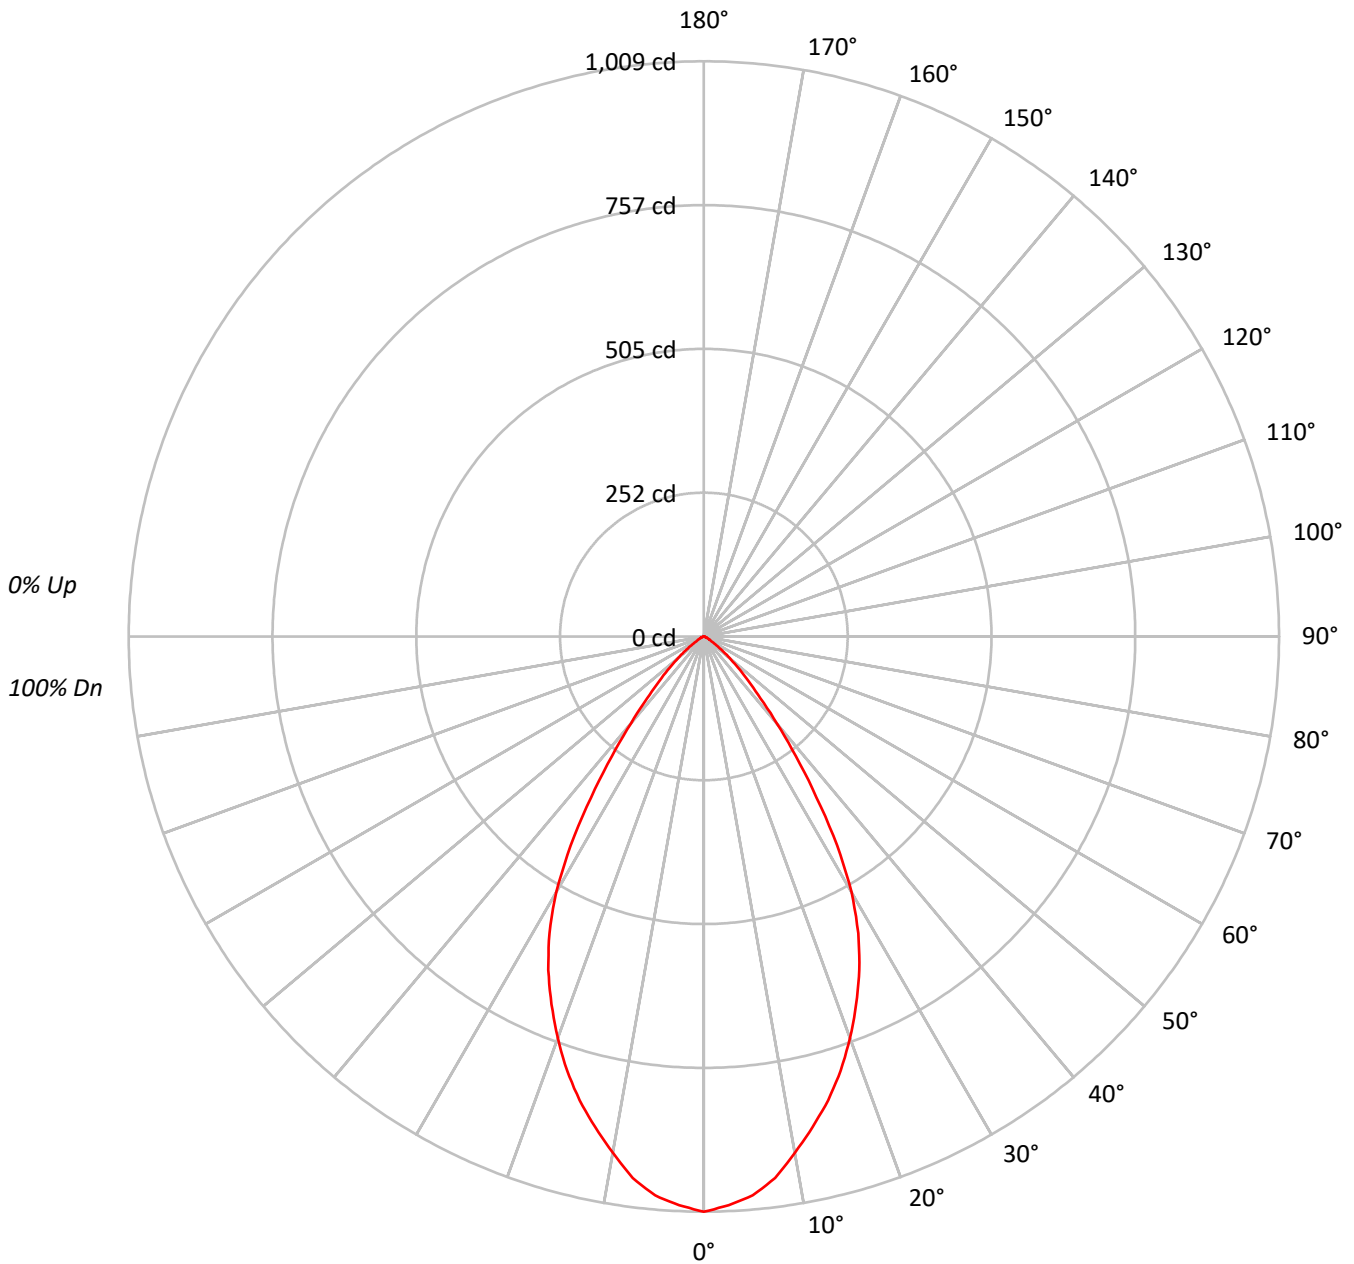



TEST NUMBER: P579686

CATALOG NUMBER: HC410D010-HM40525827-41MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86	86	86	86
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	81	79	79	79	79
4	96	88	82	78	94	87	81	77	85	80	76	82	79	75	81	77	74	73	73	73	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67	67	67	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62	62	62	62
7	81	71	65	61	80	71	65	61	69	64	60	68	63	60	67	63	60	58	58	58	58
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	56	54	54	54	54
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	60	55	52	51	51	51	51
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	47	47	47	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	124468
5°	121848
10°	115153
15°	107546
20°	98367
25°	87851
30°	73763
35°	51889
40°	32010
45°	19153
50°	11283
55°	5634
60°	2886
65°	1897
70°	1190
75°	905
80°	497
85°	991



TEST NUMBER: P579686

CATALOG NUMBER: HC410D010-HM40525827-41MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.9	9.6
10°-20°	235.4	24.5
20°-30°	293.6	30.5
30°-40°	216.3	22.5
40°-50°	88.9	9.3
50°-60°	26.0	2.7
60°-70°	6.7	0.7
70°-80°	2.1	0.2
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	621.0	64.6
0°-40°	837.2	87.1
0°-60°	952.1	99.0
0°-90°	961.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	961.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1009	
5°	984	92
15°	842	235
25°	646	294
35°	345	216
45°	110	89
55°	26	26
65°	6	7
75°	2	2
85°	1	0
90°	0	



TEST NUMBER: P579686

CATALOG NUMBER: HC410D010-HM40525827-41MDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1009.1
2.5°	998.6
5°	984.1
7.5°	958.0
10°	919.4
12.5°	881.5
15°	842.2
17.5°	798.4
20°	749.4
22.5°	698.4
25°	645.5
27.5°	586.6
30°	517.9
32.5°	434.8
35°	344.6
37.5°	264.8
40°	198.8
42.5°	147.1
45°	109.8
47.5°	81.1
50°	58.8
52.5°	40.5
55°	26.2
57.5°	15.7
60°	11.7
62.5°	8.5
65°	6.5
67.5°	4.6
70°	3.3
72.5°	2.6
75°	1.9
77.5°	1.3
80°	0.7
82.5°	0.7
85°	0.7
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)