

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P592607

Luminaire Tested: **HC4R10D010-HM40525850-42RMDC**

Issue Date: 9/23/2021

Test Information

Test Method: LM-41-14
Report Number: P592607
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-13)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/23/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC4R10D010-HM40525850-42RMDC
Description: HALO COMMERCIAL 4" ROUND, RETROFIT FRAME, WITH 4" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 5000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1170.3 lumens
Efficiency: N/A
Efficacy: 118.2 lumens/watt
Spacing Criteria (0/90/45): 1.02 / 1.02 / 0.96
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 9.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P592607

CATALOG NUMBER: HC4R10D010-HM40525850-42RMDC

Luminous Intensity Polar Plot

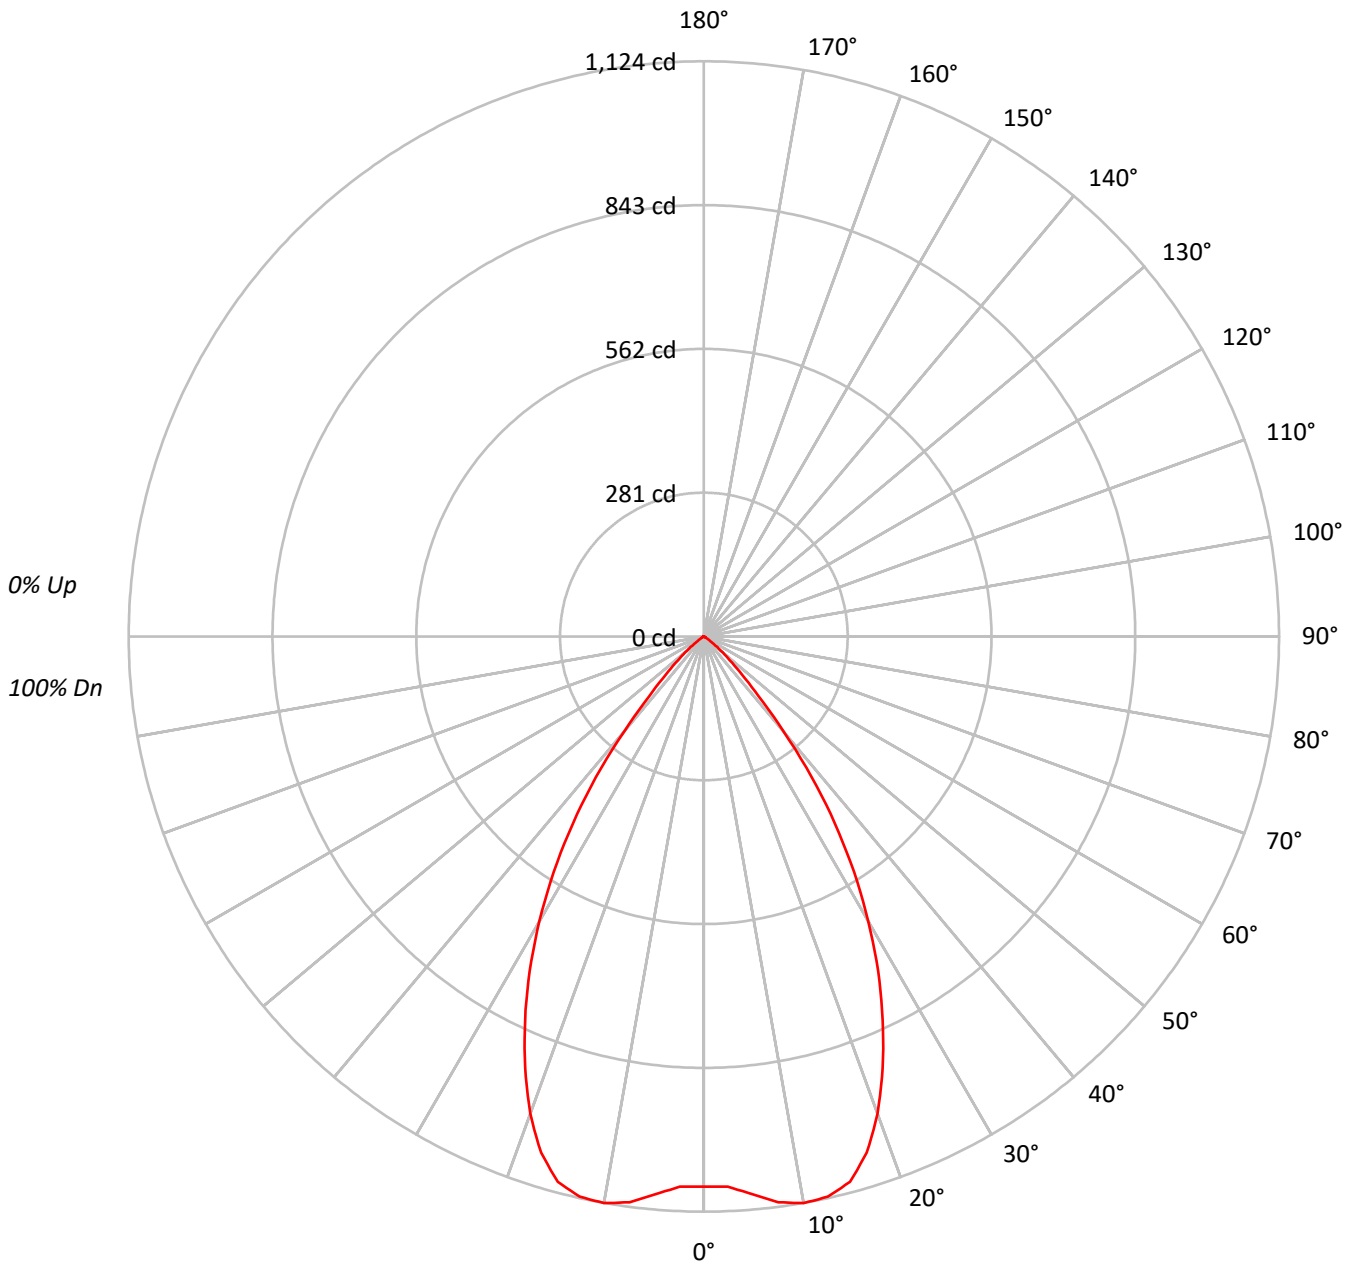



TEST NUMBER: P592607

CATALOG NUMBER: HC4R10D010-HM40525850-42RMDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	74			
5	92	83	77	73	90	82	76	72	80	75	72	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64			
7	82	73	66	62	81	72	66	62	71	65	62	69	65	61	68	64	61	60			
8	78	68	62	58	77	68	62	58	67	61	57	65	61	57	65	60	57	56			
9	74	64	58	54	73	64	58	54	63	57	54	62	57	54	61	57	53	52			
10	70	61	55	51	69	60	54	51	59	54	50	58	54	50	58	53	50	49			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	132621
5°	135456
10°	140804
15°	140862
20°	130225
25°	112538
30°	91566
35°	67263
40°	38885
45°	18159
50°	8405
55°	2903
60°	937
65°	671
70°	541
75°	381
80°	0
85°	0



TEST NUMBER: P592607

CATALOG NUMBER: HC4R10D010-HM40525850-42RMDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	105.5	9.0
10°-20°	305.7	26.1
20°-30°	376.5	32.2
30°-40°	274.9	23.5
40°-50°	89.6	7.7
50°-60°	14.9	1.3
60°-70°	2.4	0.2
70°-80°	0.8	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	787.7	67.3
0°-40°	1062.6	90.8
0°-60°	1167.1	99.7
0°-90°	1170.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1170.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1075	
5°	1094	106
15°	1103	306
25°	827	376
35°	447	275
45°	104	90
55°	14	15
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P592607

CATALOG NUMBER: HC4R10D010-HM40525850-42RMDC

CANDELA DISTRIBUTION (FULL):

0°	
0°	1075.2
2.5°	1075.9
5°	1094.0
7.5°	1115.1
10°	1124.2
12.5°	1121.2
15°	1103.1
17.5°	1057.8
20°	992.1
22.5°	912.9
25°	826.9
27.5°	737.2
30°	642.9
32.5°	546.2
35°	446.7
37.5°	346.3
40°	241.5
42.5°	157.7
45°	104.1
47.5°	68.6
50°	43.8
52.5°	25.6
55°	13.5
57.5°	5.2
60°	3.8
62.5°	3.1
65°	2.3
67.5°	1.5
70°	1.5
72.5°	0.8
75°	0.8
77.5°	0.8
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)