

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P579795

Luminaire Tested: **HC410D010-HM40525935-41NDH**

Issue Date: 9/9/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P579795  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-2)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC410D010-HM40525935-41NDH  
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" NARROW DISTRIBUTION, HAZE TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 910.3 lumens  
Efficiency: N/A  
Efficacy: 91.9 lumens/watt  
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.91  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P579795

CATALOG NUMBER: HC410D010-HM40525935-41NDH

### Luminous Intensity Polar Plot

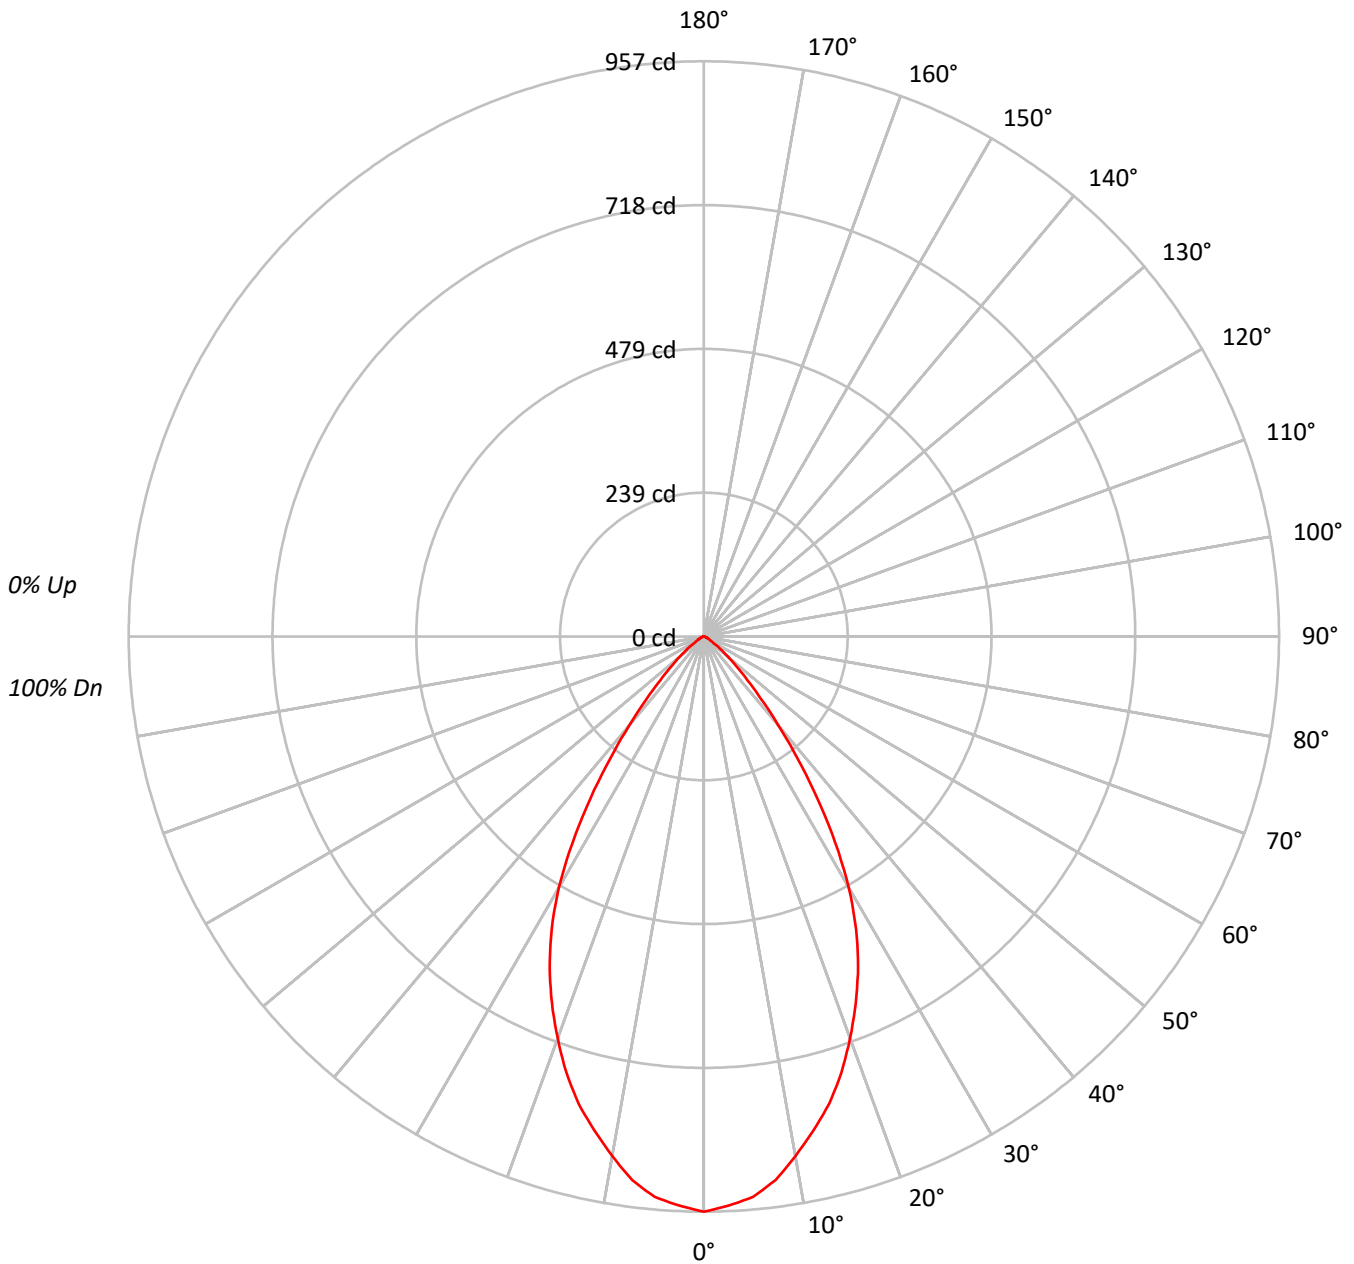



TEST NUMBER: P579795

CATALOG NUMBER: HC410D010-HM40525935-41NDH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86	86	86	86
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	80	79	79	79	79
4	96	88	82	78	94	87	81	77	85	80	76	82	79	75	81	77	74	73	73	73	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67	67	67	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	63	63	63	63
7	81	72	65	61	80	71	65	61	70	64	60	68	64	60	67	63	60	58	58	58	58
8	77	67	61	57	76	67	61	56	65	60	56	64	59	56	63	59	56	54	54	54	54
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	60	55	52	51	51	51	51
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48	48	48	48

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	118054
5°	115905
10°	109931
15°	102796
20°	93353
25°	82611
30°	68721
35°	49555
40°	30931
45°	17845
50°	10074
55°	4796
60°	2763
65°	2101
70°	1443
75°	905
80°	994
85°	991



TEST NUMBER: P579795

CATALOG NUMBER: HC410D010-HM40525935-41NDH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	87.5	9.6
10°-20°	224.6	24.7
20°-30°	276.2	30.3
30°-40°	205.1	22.5
40°-50°	83.4	9.2
50°-60°	23.1	2.5
60°-70°	7.2	0.8
70°-80°	2.4	0.3
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	588.2	64.6
0°-40°	793.3	87.2
0°-60°	899.9	98.9
0°-90°	910.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	910.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	957	
5°	936	87
15°	805	225
25°	607	276
35°	329	205
45°	102	83
55°	22	23
65°	7	7
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P579795

CATALOG NUMBER: HC410D010-HM40525935-41NDH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	957.1
2.5°	947.8
5°	936.1
7.5°	912.4
10°	877.7
12.5°	841.7
15°	805.0
17.5°	761.1
20°	711.2
22.5°	660.7
25°	607.0
27.5°	548.6
30°	482.5
32.5°	407.1
35°	329.1
37.5°	255.6
40°	192.1
42.5°	140.3
45°	102.3
47.5°	73.4
50°	52.5
52.5°	36.1
55°	22.3
57.5°	14.5
60°	11.2
62.5°	9.2
65°	7.2
67.5°	5.2
70°	4.0
72.5°	3.3
75°	1.9
77.5°	1.4
80°	1.4
82.5°	0.7
85°	0.7
87.5°	0.7
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)