

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P579830

Luminaire Tested: **HC415D010-HM40525827-41MDH**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P579830
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC415D010-HM40525827-41MDH
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1307.1 lumens
Efficiency: N/A
Efficacy: 93.4 lumens/watt
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.91
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 14
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P579830

CATALOG NUMBER: HC415D010-HM40525827-41MDH

Luminous Intensity Polar Plot

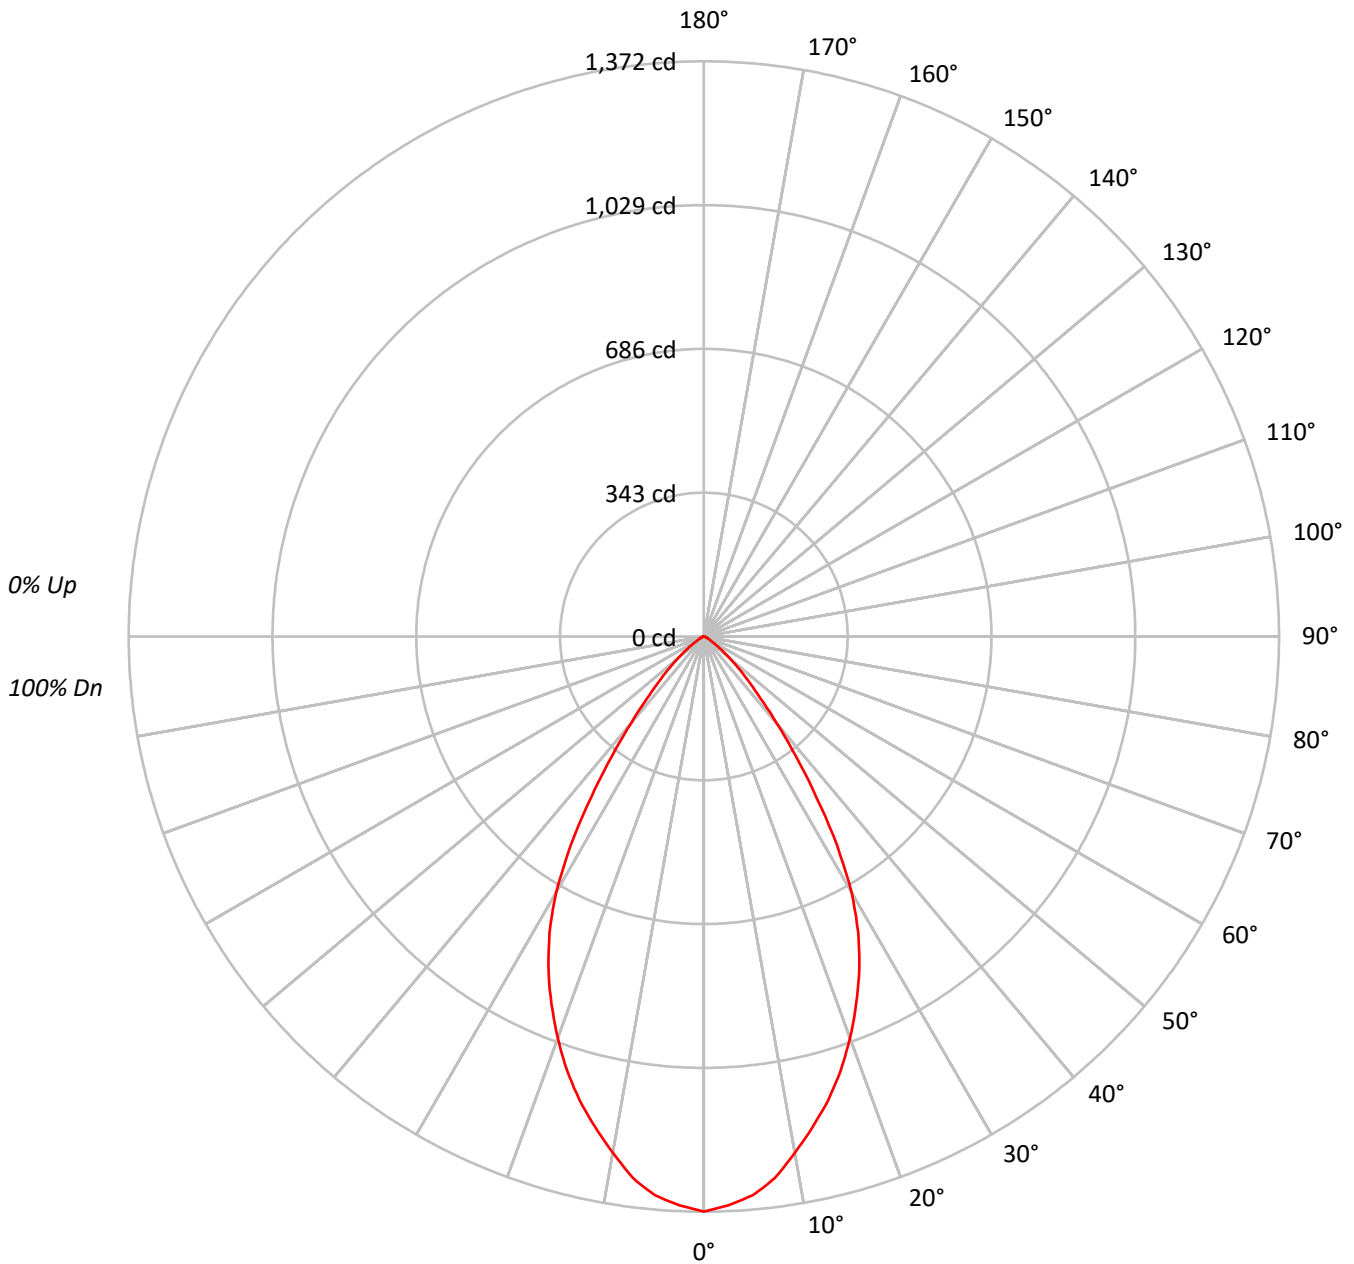



TEST NUMBER: P579830

CATALOG NUMBER: HC415D010-HM40525827-41MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93				93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86				86
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	81	79				79
4	96	88	82	78	94	87	81	77	85	80	76	82	79	75	81	77	74	73				73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67				67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62				62
7	81	71	65	61	80	71	65	61	69	64	60	68	63	60	67	63	60	58				58
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	56	54				54
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	60	55	52	51				51
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	47				47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	169218
5°	165679
10°	156573
15°	146238
20°	133756
25°	119425
30°	100283
35°	70560
40°	43523
45°	26061
50°	15351
55°	7656
60°	3947
65°	2598
70°	1587
75°	1239
80°	639
85°	1274



TEST NUMBER: P579830

CATALOG NUMBER: HC415D010-HM40525827-41MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	125.0	9.6
10°-20°	320.1	24.5
20°-30°	399.2	30.5
30°-40°	294.1	22.5
40°-50°	120.9	9.3
50°-60°	35.3	2.7
60°-70°	9.1	0.7
70°-80°	2.8	0.2
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	844.3	64.6
0°-40°	1138.3	87.1
0°-60°	1294.6	99.0
0°-90°	1307.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1307.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1372	
5°	1338	125
15°	1145	320
25°	878	399
35°	469	294
45°	149	121
55°	36	35
65°	9	9
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P579830

CATALOG NUMBER: HC415D010-HM40525827-41MDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1371.9
2.5°	1357.7
5°	1338.1
7.5°	1302.5
10°	1250.1
12.5°	1198.5
15°	1145.2
17.5°	1085.6
20°	1019.0
22.5°	949.6
25°	877.5
27.5°	797.5
30°	704.1
32.5°	591.2
35°	468.6
37.5°	360.1
40°	270.3
42.5°	200.0
45°	149.4
47.5°	110.3
50°	80.0
52.5°	55.1
55°	35.6
57.5°	21.4
60°	16.0
62.5°	11.6
65°	8.9
67.5°	6.3
70°	4.4
72.5°	3.5
75°	2.6
77.5°	1.8
80°	0.9
82.5°	0.9
85°	0.9
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)