

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P579874

Luminaire Tested: **HC415D010-HM40525835-41NDW**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P579874
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-3)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC415D010-HM40525835-41NDW
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" NARROW DISTRIBUTION, WHITE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1373.7 lumens
Efficiency: N/A
Efficacy: 98.1 lumens/watt
Spacing Criteria (0/90/45): 1.03 / 1.03 / 1.01
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 14
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P579874

CATALOG NUMBER: HC415D010-HM40525835-41NDW

Luminous Intensity Polar Plot

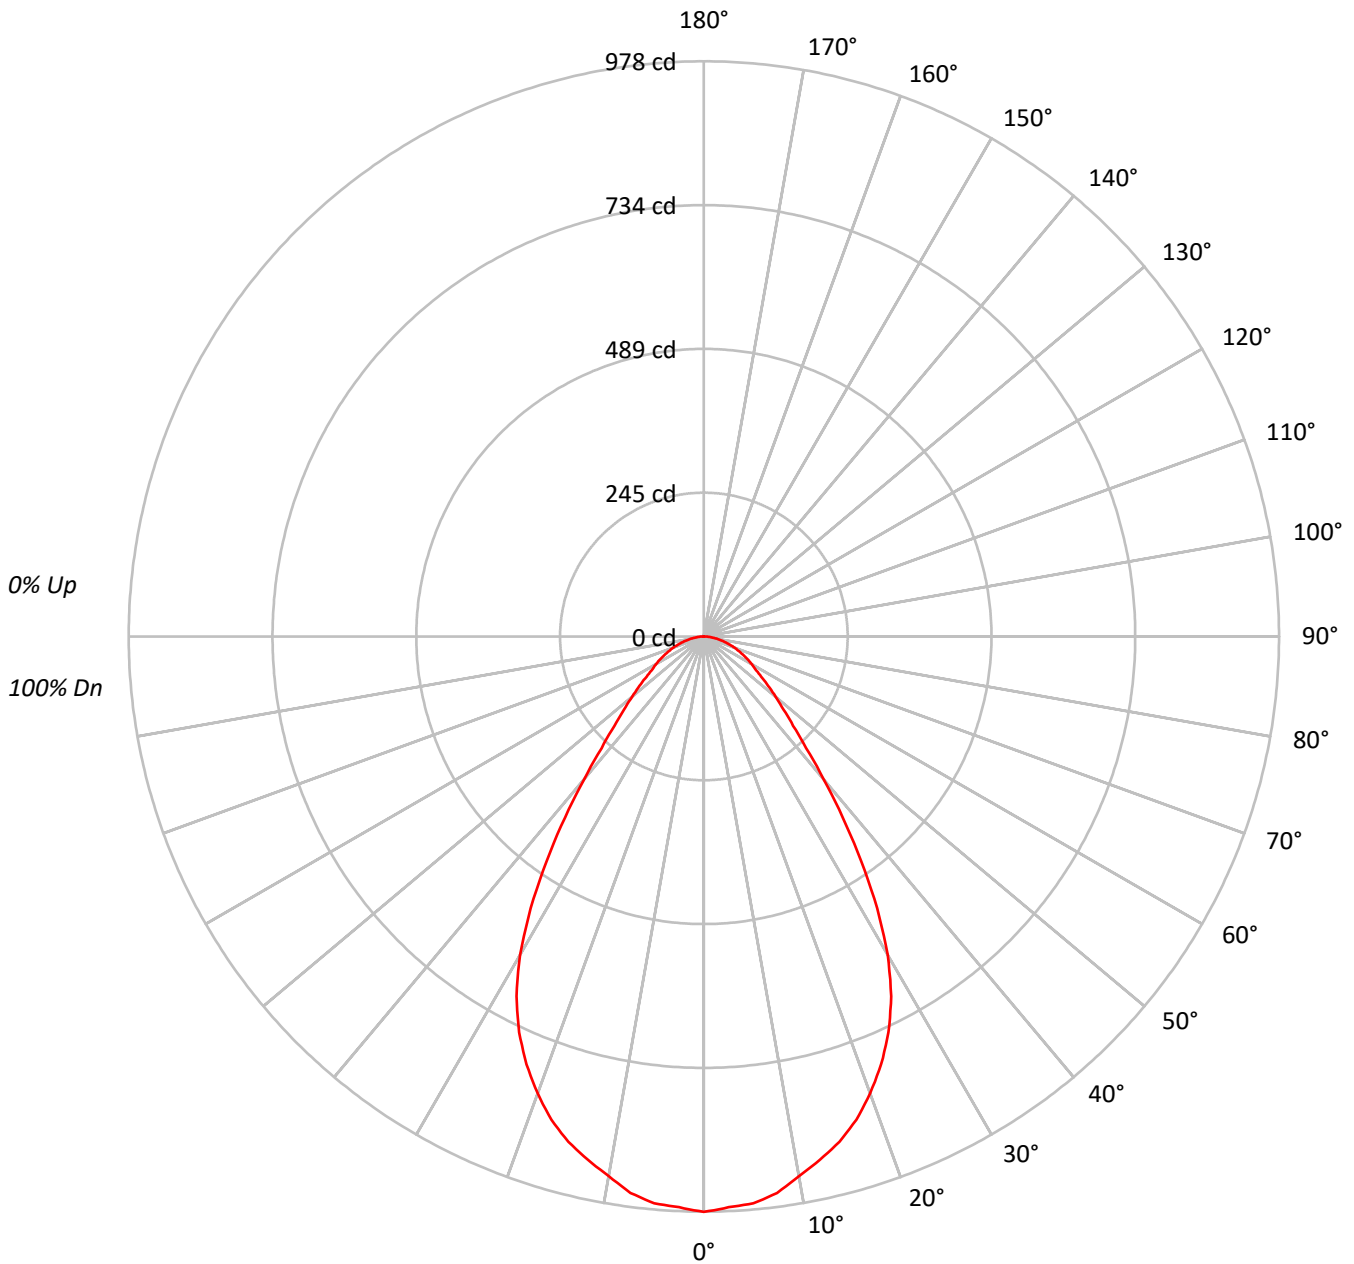



TEST NUMBER: P579874

CATALOG NUMBER: HC415D010-HM40525835-41NDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	108	104	101	109	105	102	100	101	99	97	98	96	94	94	92	91	89			89
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79			79
3	97	88	82	77	95	87	81	76	84	79	75	82	77	74	79	76	73	71			71
4	90	81	74	68	88	80	73	68	77	72	67	75	70	66	73	69	65	64			64
5	85	74	67	61	83	73	66	61	71	65	60	69	64	60	68	63	59	58			58
6	79	68	61	56	78	67	60	55	66	60	55	64	59	55	63	58	54	52			52
7	75	63	56	51	73	62	56	51	61	55	50	60	54	50	59	53	50	48			48
8	70	59	52	47	69	58	51	46	57	51	46	56	50	46	55	50	46	44			44
9	66	55	48	43	65	54	47	43	53	47	43	52	47	43	51	46	42	41			41
10	63	51	44	40	62	51	44	40	50	44	40	49	43	39	48	43	39	38			38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	120681
5°	119793
10°	116669
15°	113599
20°	108514
25°	101093
30°	89017
35°	70214
40°	50962
45°	37452
50°	30453
55°	25548
60°	23140
65°	21277
70°	19799
75°	18110
80°	16337
85°	14152



TEST NUMBER: P579874

CATALOG NUMBER: HC415D010-HM40525835-41NDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.2	6.6
10°-20°	249.5	18.2
20°-30°	338.2	24.6
30°-40°	290.2	21.1
40°-50°	171.4	12.5
50°-60°	108.6	7.9
60°-70°	73.0	5.3
70°-80°	40.3	2.9
80°-90°	11.3	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	679.0	49.4
0°-40°	969.2	70.6
0°-60°	1249.1	90.9
0°-90°	1373.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1373.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	978	
5°	968	91
15°	890	250
25°	743	338
35°	466	290
45°	215	171
55°	119	109
65°	73	73
75°	38	40
85°	10	11
90°	0	



TEST NUMBER: P579874

CATALOG NUMBER: HC415D010-HM40525835-41NDW

CANDELA DISTRIBUTION (FULL):

	0°
0°	978.4
2.5°	971.5
5°	967.5
7.5°	954.4
10°	931.5
12.5°	911.5
15°	889.6
17.5°	861.6
20°	826.7
22.5°	787.7
25°	742.8
27.5°	689.9
30°	625.0
32.5°	548.1
35°	466.3
37.5°	387.4
40°	316.5
42.5°	257.5
45°	214.7
47.5°	183.7
50°	158.7
52.5°	137.8
55°	118.8
57.5°	103.8
60°	93.8
62.5°	83.9
65°	72.9
67.5°	63.9
70°	54.9
72.5°	45.9
75°	38.0
77.5°	29.9
80°	23.0
82.5°	15.9
85°	10.0
87.5°	4.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)