

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P579909

Luminaire Tested: **HC415D010-HM40525927-41MDW**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P579909
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-6)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC415D010-HM40525927-41MDW
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" MEDIUM DISTRIBUTION, WHITE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1098.4 lumens
Efficiency: N/A
Efficacy: 78.5 lumens/watt
Spacing Criteria (0/90/45): 1.04 / 1.04 / 1.01
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 14
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P579909

CATALOG NUMBER: HC415D010-HM40525927-41MDW

Luminous Intensity Polar Plot

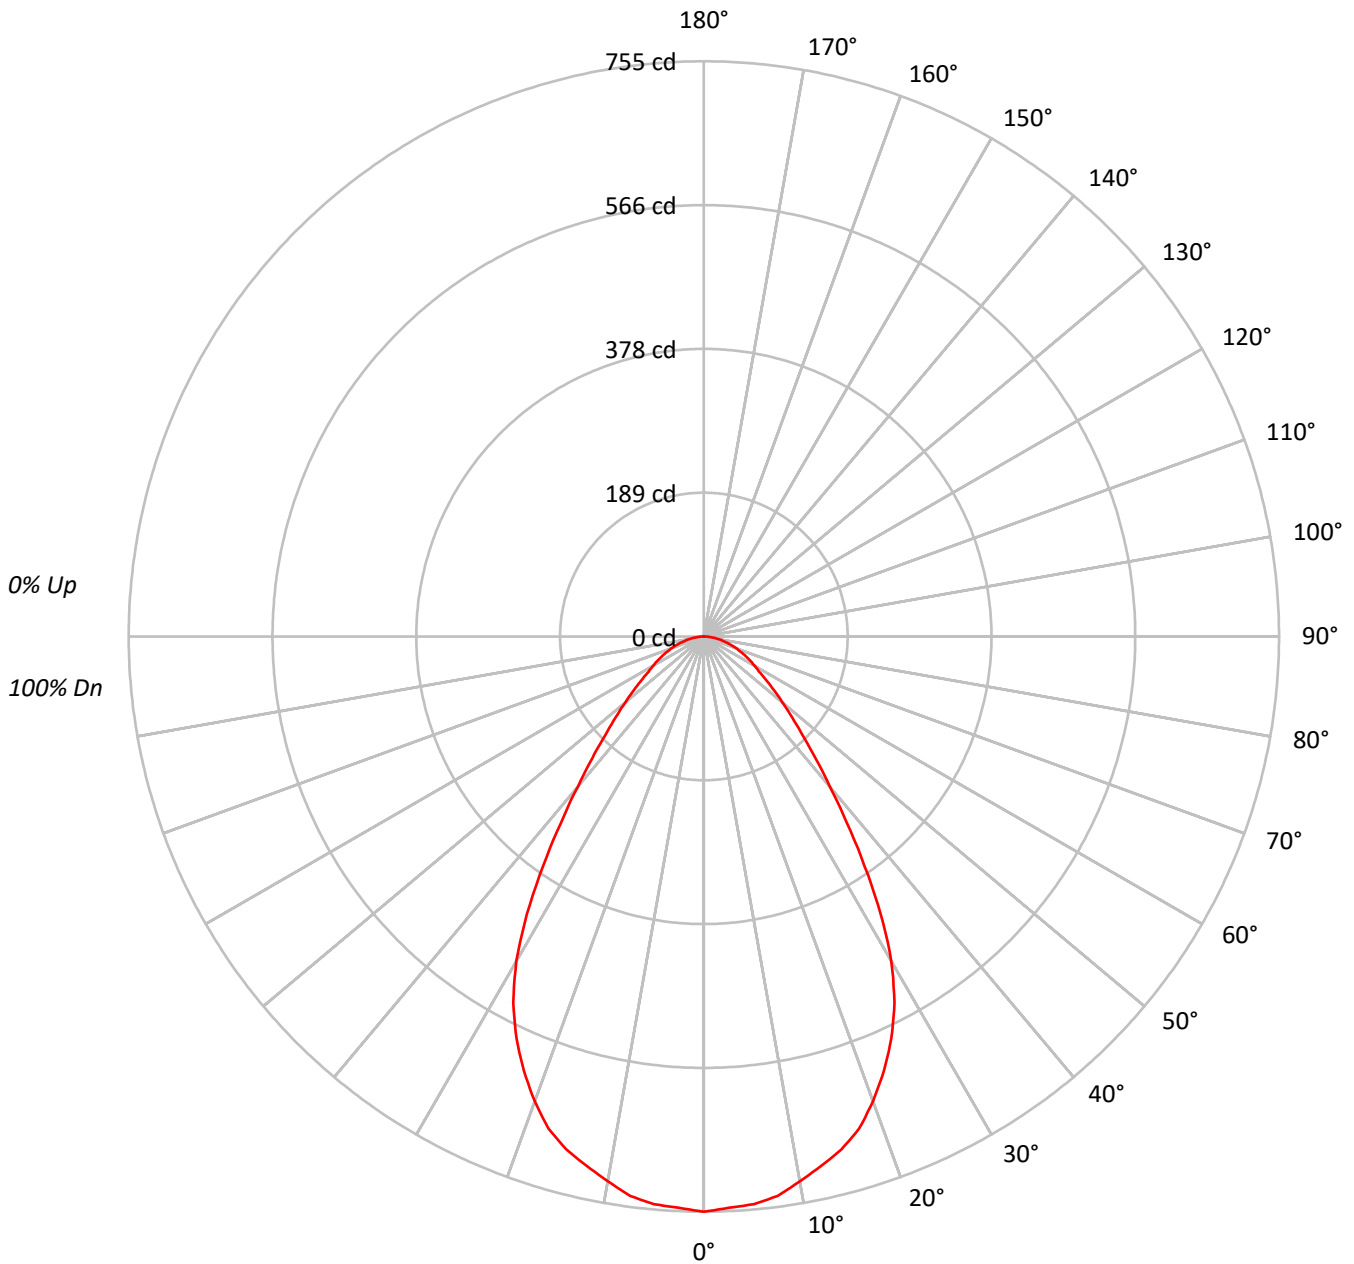



TEST NUMBER: P579909

CATALOG NUMBER: HC415D010-HM40525927-41MDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	108	104	101	109	105	102	100	101	99	97	97	95	94	94	92	91	89			89
2	104	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	81	79			79
3	97	88	82	76	94	87	81	76	84	79	75	81	77	73	79	75	72	70			70
4	90	80	73	68	88	79	73	67	77	71	67	75	70	66	73	68	65	63			63
5	84	74	66	61	82	73	66	61	71	65	60	69	64	59	67	63	59	57			57
6	79	68	60	55	77	67	60	55	65	59	54	64	58	54	62	57	54	52			52
7	74	63	55	50	73	62	55	50	61	54	50	59	54	49	58	53	49	47			47
8	70	58	51	46	68	58	51	46	56	50	46	55	50	45	54	49	45	44			44
9	66	54	47	42	65	54	47	42	53	46	42	52	46	42	51	46	42	40			40
10	62	51	44	39	61	50	44	39	49	43	39	48	43	39	48	42	39	37			37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	93138
5°	92627
10°	90943
15°	89030
20°	85215
25°	79249
30°	70131
35°	55352
40°	41429
45°	31870
50°	25848
55°	21440
60°	18971
65°	17541
70°	16193
75°	14869
80°	13496
85°	10756



TEST NUMBER: P579909

CATALOG NUMBER: HC415D010-HM40525927-41MDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.7	6.4
10°-20°	195.5	17.8
20°-30°	265.5	24.2
30°-40°	230.0	20.9
40°-50°	144.4	13.1
50°-60°	90.8	8.3
60°-70°	59.6	5.4
70°-80°	32.9	3.0
80°-90°	9.0	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	531.7	48.4
0°-40°	761.7	69.3
0°-60°	996.9	90.8
0°-90°	1098.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1098.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	755	
5°	748	71
15°	697	196
25°	582	265
35°	368	230
45°	183	144
55°	100	91
65°	60	60
75°	31	33
85°	8	9
90°	0	



TEST NUMBER: P579909

CATALOG NUMBER: HC415D010-HM40525927-41MDW

CANDELA DISTRIBUTION (FULL):

	0°
0°	755.1
2.5°	750.5
5°	748.1
7.5°	740.6
10°	726.1
12.5°	711.6
15°	697.2
17.5°	677.4
20°	649.2
22.5°	617.3
25°	582.3
27.5°	541.9
30°	492.4
32.5°	432.3
35°	367.6
37.5°	308.2
40°	257.3
42.5°	216.9
45°	182.7
47.5°	156.8
50°	134.7
52.5°	115.7
55°	99.7
57.5°	86.0
60°	76.9
62.5°	68.4
65°	60.1
67.5°	51.7
70°	44.9
72.5°	37.3
75°	31.2
77.5°	24.3
80°	19.0
82.5°	13.0
85°	7.6
87.5°	3.1
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)