

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P579980

Luminaire Tested: **HC420D010-HM40525827-41WDC**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P579980
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-7)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC420D010-HM40525827-41WDC
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2052.5 lumens
Efficiency: N/A
Efficacy: 102.6 lumens/watt
Spacing Criteria (0/90/45): 1.25 / 1.25 / 1.11
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 20
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P579980

CATALOG NUMBER: HC420D010-HM40525827-41WDC

Luminous Intensity Polar Plot

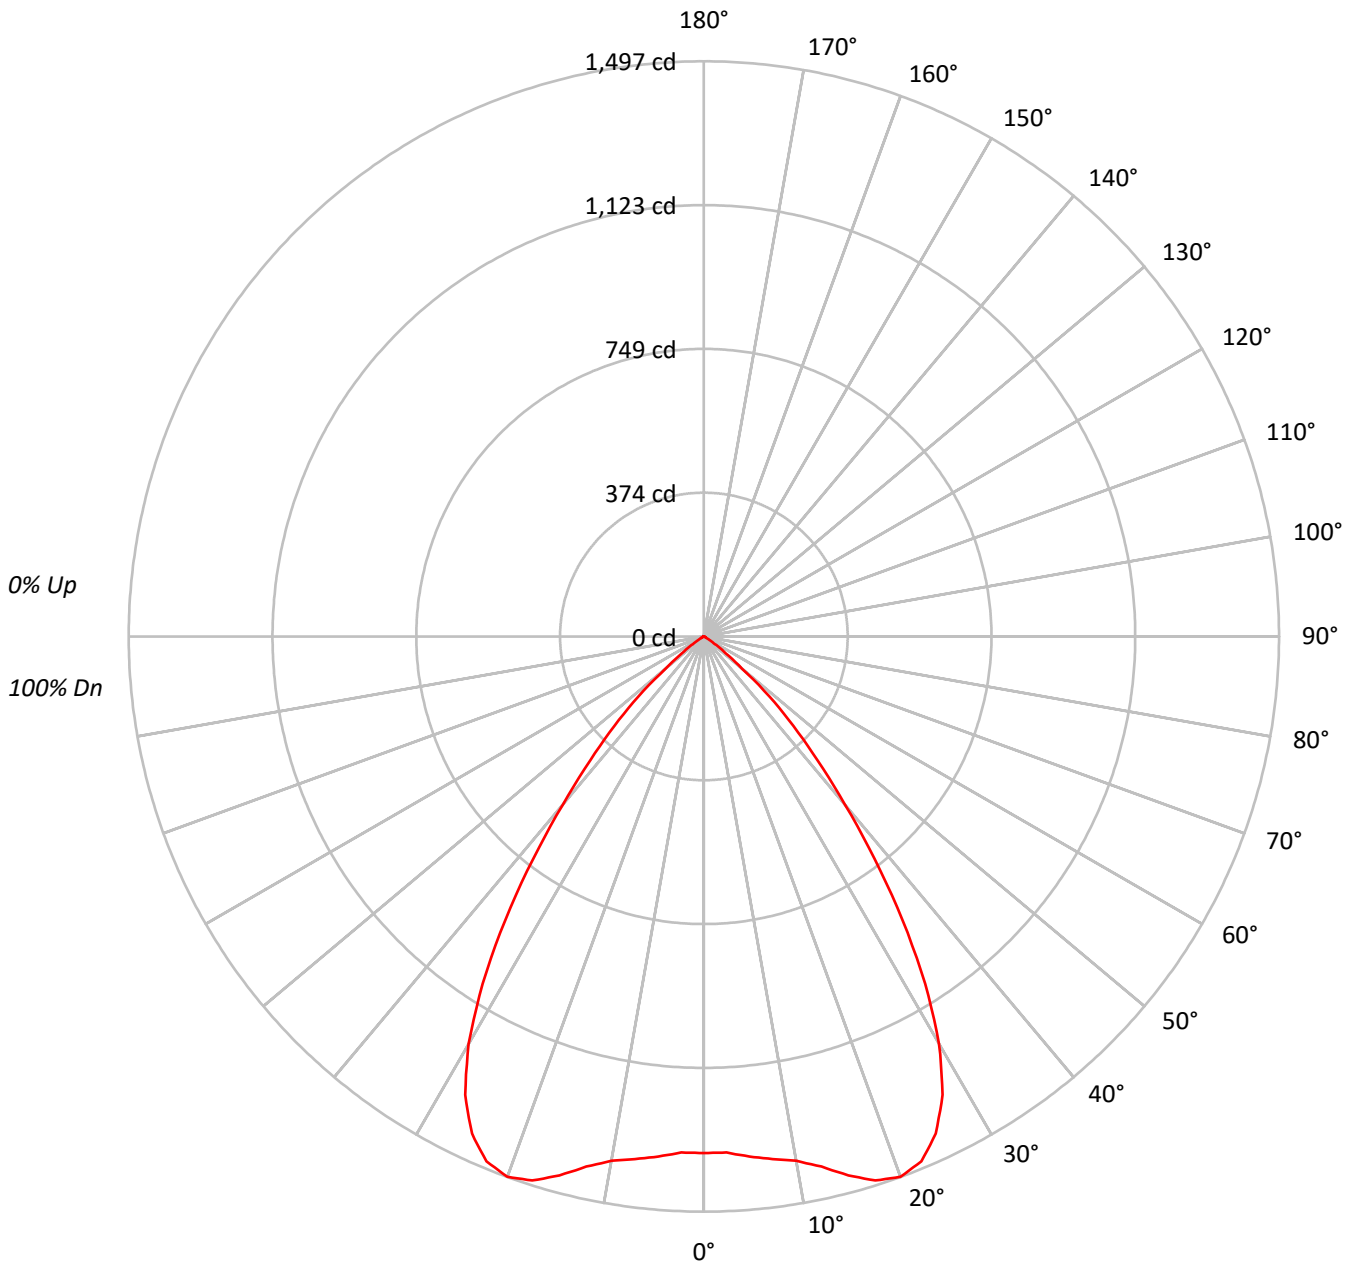



TEST NUMBER: P579980

CATALOG NUMBER: HC420D010-HM40525827-41WDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92	92	92	92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85	85	85	85
3	101	93	88	84	98	92	87	83	89	85	82	87	83	80	85	82	79	77	77	77	77
4	95	86	80	76	93	85	79	75	83	78	74	81	77	73	79	75	72	71	71	71	71
5	89	80	73	69	87	79	73	68	77	72	68	75	71	67	74	70	66	65	65	65	65
6	84	74	67	63	82	73	67	62	72	66	62	70	65	62	69	65	61	60	60	60	60
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55	55	55	55
8	75	64	57	53	73	63	57	53	62	57	53	61	56	52	60	56	52	51	51	51	51
9	70	60	53	49	69	59	53	49	58	53	49	57	52	48	56	52	48	47	47	47	47
10	67	56	50	45	66	55	49	45	55	49	45	54	49	45	53	48	45	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	165801
5°	168217
10°	173507
15°	185403
20°	196446
25°	194305
30°	174388
35°	135715
40°	91956
45°	57407
50°	24850
55°	8344
60°	2097
65°	1401
70°	866
75°	620
80°	923
85°	0



TEST NUMBER: P579980

CATALOG NUMBER: HC420D010-HM40525827-41WDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	130.5	6.4
10°-20°	412.1	20.1
20°-30°	645.8	31.5
30°-40°	557.3	27.2
40°-50°	256.3	12.5
50°-60°	43.5	2.1
60°-70°	4.9	0.2
70°-80°	1.8	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1188.4	57.9
0°-40°	1745.7	85.1
0°-60°	2045.5	99.7
0°-90°	2052.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2052.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1344	
5°	1359	131
15°	1452	412
25°	1428	646
35°	901	557
45°	329	256
55°	39	44
65°	5	5
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P579980

CATALOG NUMBER: HC420D010-HM40525827-41WDC

CANDELA DISTRIBUTION (FULL):

0°	
0°	1344.2
2.5°	1344.2
5°	1358.6
7.5°	1371.9
10°	1385.3
12.5°	1413.1
15°	1451.9
17.5°	1484.4
20°	1496.6
22.5°	1478.5
25°	1427.7
27.5°	1345.3
30°	1224.4
32.5°	1072.0
35°	901.3
37.5°	729.5
40°	571.1
42.5°	436.8
45°	329.1
47.5°	231.1
50°	129.5
52.5°	71.3
55°	38.8
57.5°	19.4
60°	8.5
62.5°	6.1
65°	4.8
67.5°	3.7
70°	2.4
72.5°	2.4
75°	1.3
77.5°	1.3
80°	1.3
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)