

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P571727

Luminaire Tested: **HC420D010-HM40525835-41MDC**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P571727
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC420D010-HM40525835-41MDC
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2096.5 lumens
Efficiency: N/A
Efficacy: 104.8 lumens/watt
Spacing Criteria (0/90/45): 1 / 1 / 0.96
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 20
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P571727

CATALOG NUMBER: HC420D010-HM40525835-41MDC

Luminous Intensity Polar Plot

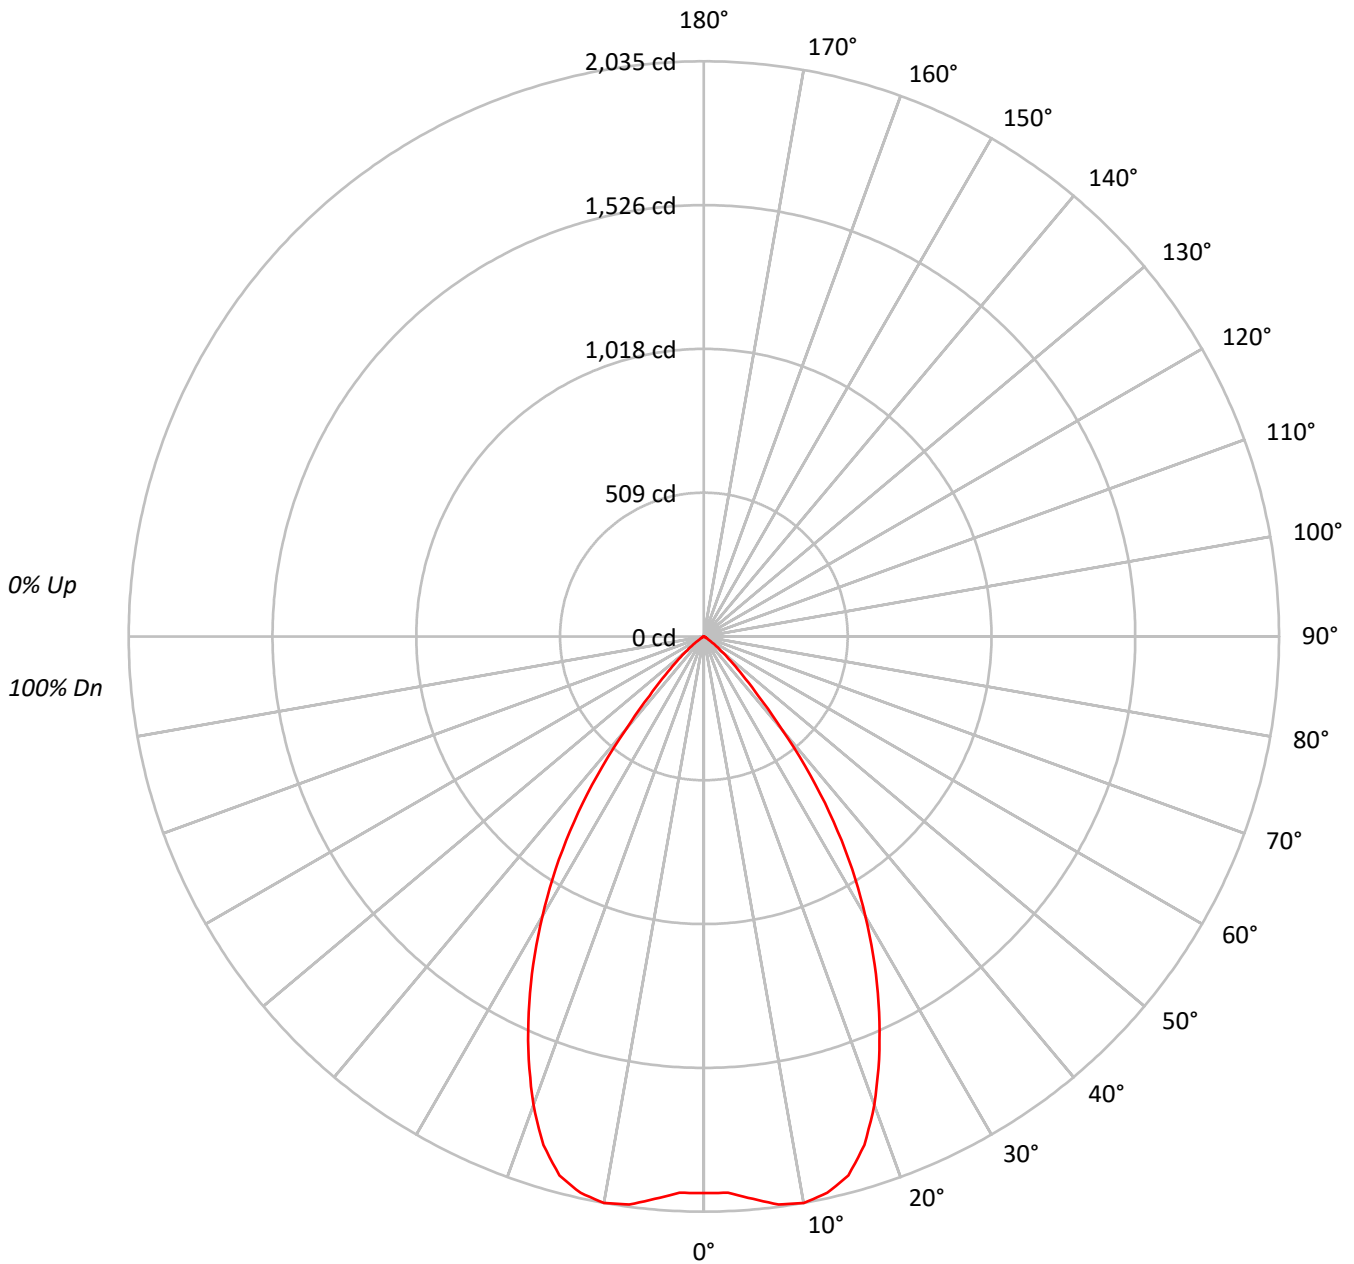



TEST NUMBER: P571727

CATALOG NUMBER: HC420D010-HM40525835-41MDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	98	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	74			
5	91	83	77	72	90	82	76	72	80	75	72	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64			
7	82	73	66	62	81	72	66	62	71	65	62	69	65	61	68	64	61	60			
8	78	68	62	58	77	68	62	58	67	61	57	65	61	57	64	60	57	56			
9	74	64	58	54	73	64	58	54	63	57	54	62	57	54	61	57	53	52			
10	70	61	55	51	69	60	54	51	59	54	50	58	54	50	58	53	50	49			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	242831
5°	247287
10°	254906
15°	252086
20°	231480
25°	199709
30°	162737
35°	120507
40°	69124
45°	33405
50°	15908
55°	5548
60°	1998
65°	1197
70°	1010
75°	667
80°	0
85°	0



TEST NUMBER: P571727

CATALOG NUMBER: HC420D010-HM40525835-41MDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	192.1	9.2
10°-20°	547.3	26.1
20°-30°	668.3	31.9
30°-40°	491.3	23.4
40°-50°	162.8	7.8
50°-60°	28.8	1.4
60°-70°	4.4	0.2
70°-80°	1.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1407.7	67.1
0°-40°	1899.0	90.6
0°-60°	2090.6	99.7
0°-90°	2096.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2096.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1969	
5°	1997	192
15°	1974	547
25°	1467	668
35°	800	491
45°	192	163
55°	26	29
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P571727

CATALOG NUMBER: HC420D010-HM40525835-41MDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	1968.7
2.5°	1970.0
5°	1997.2
7.5°	2027.1
10°	2035.2
12.5°	2016.2
15°	1974.1
17.5°	1887.2
20°	1763.5
22.5°	1619.4
25°	1467.4
27.5°	1308.4
30°	1142.6
32.5°	976.9
35°	800.3
37.5°	620.9
40°	429.3
42.5°	284.0
45°	191.5
47.5°	127.7
50°	82.9
52.5°	48.9
55°	25.8
57.5°	10.9
60°	8.1
62.5°	5.4
65°	4.1
67.5°	2.8
70°	2.8
72.5°	1.4
75°	1.4
77.5°	1.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)