

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580062

Luminaire Tested: **HC4R20D010-HM40525930-42RMDC**

Issue Date: 9/23/2021

Test Information

Test Method: LM-41-14
Report Number: P580062
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-13)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/23/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC4R20D010-HM40525930-42RMDC
Description: HALO COMMERCIAL 4" ROUND, RETROFIT FRAME, WITH 4" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1785.4 lumens
Efficiency: N/A
Efficacy: 89.3 lumens/watt
Spacing Criteria (0/90/45): 1.02 / 1.02 / 0.96
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 20
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580062

CATALOG NUMBER: HC4R20D010-HM40525930-42RMDC

Luminous Intensity Polar Plot

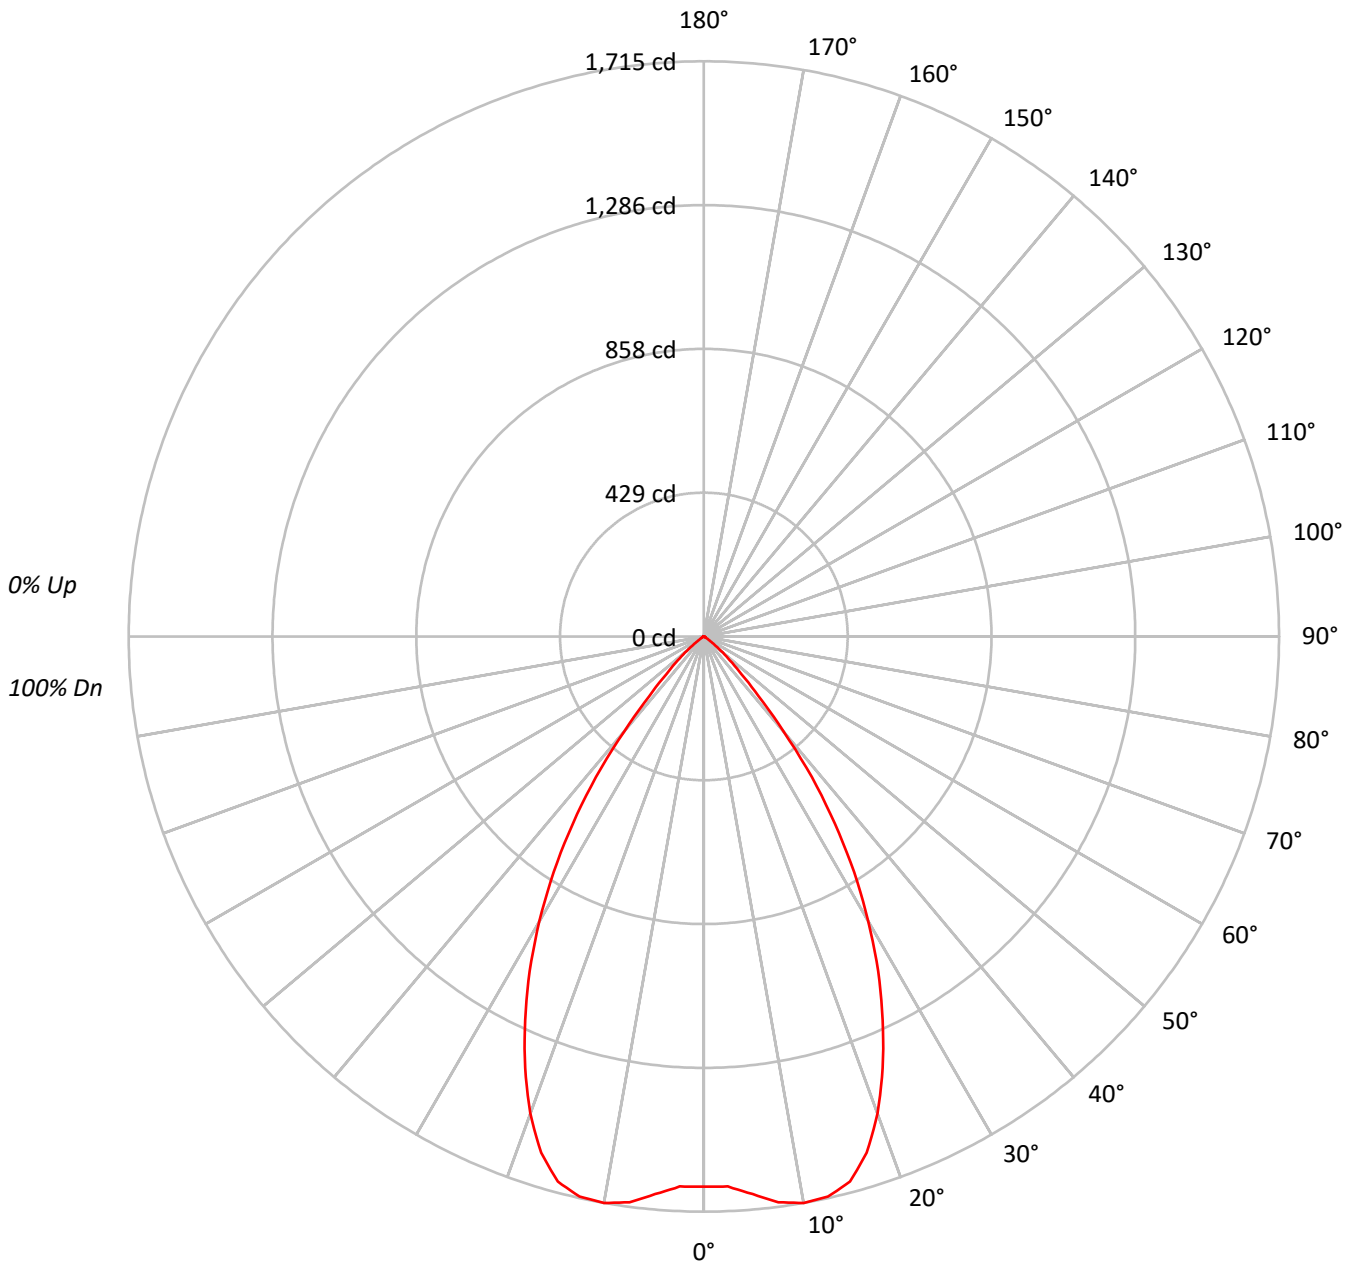



TEST NUMBER: P580062

CATALOG NUMBER: HC4R20D010-HM40525930-42RMDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	74
5	92	83	77	73	90	82	76	72	80	75	72	78	74	71	77	73	70	69
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64
7	82	73	66	62	81	72	66	62	71	65	62	69	65	61	68	64	61	60
8	78	68	62	58	77	68	62	58	67	61	57	65	61	57	65	60	57	56
9	74	64	58	54	73	64	58	54	63	57	54	62	57	54	61	57	53	52
10	70	61	55	51	69	60	54	51	59	54	50	58	54	50	58	53	50	49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	202324
5°	206663
10°	214826
15°	214914
20°	198691
25°	171700
30°	139693
35°	102603
40°	59318
45°	27718
50°	12818
55°	4473
60°	1406
65°	992
70°	829
75°	524
80°	0
85°	0



TEST NUMBER: P580062

CATALOG NUMBER: HC4R20D010-HM40525930-42RMDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	161.0	9.0
10°-20°	466.4	26.1
20°-30°	574.4	32.2
30°-40°	419.3	23.5
40°-50°	136.7	7.7
50°-60°	22.8	1.3
60°-70°	3.5	0.2
70°-80°	1.2	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1201.8	67.3
0°-40°	1621.2	90.8
0°-60°	1780.7	99.7
0°-90°	1785.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1785.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1640	
5°	1669	161
15°	1683	466
25°	1262	574
35°	681	419
45°	159	137
55°	21	23
65°	3	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P580062

CATALOG NUMBER: HC4R20D010-HM40525930-42RMDC

CANDELA DISTRIBUTION (FULL):

0°	
0°	1640.3
2.5°	1641.5
5°	1669.1
7.5°	1701.3
10°	1715.2
12.5°	1710.5
15°	1683.0
17.5°	1613.8
20°	1513.7
22.5°	1392.9
25°	1261.6
27.5°	1124.6
30°	980.8
32.5°	833.4
35°	681.4
37.5°	528.4
40°	368.4
42.5°	240.6
45°	158.9
47.5°	104.7
50°	66.8
52.5°	39.1
55°	20.8
57.5°	8.0
60°	5.7
62.5°	4.6
65°	3.4
67.5°	2.3
70°	2.3
72.5°	1.1
75°	1.1
77.5°	1.1
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)