

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580078

Luminaire Tested: **HC420D010-HM40525935-41NDH**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580078
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-2)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC420D010-HM40525935-41NDH
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" NARROW DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1683.1 lumens
Efficiency: N/A
Efficacy: 84.2 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.91
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 20
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580078

CATALOG NUMBER: HC420D010-HM40525935-41NDH

Luminous Intensity Polar Plot

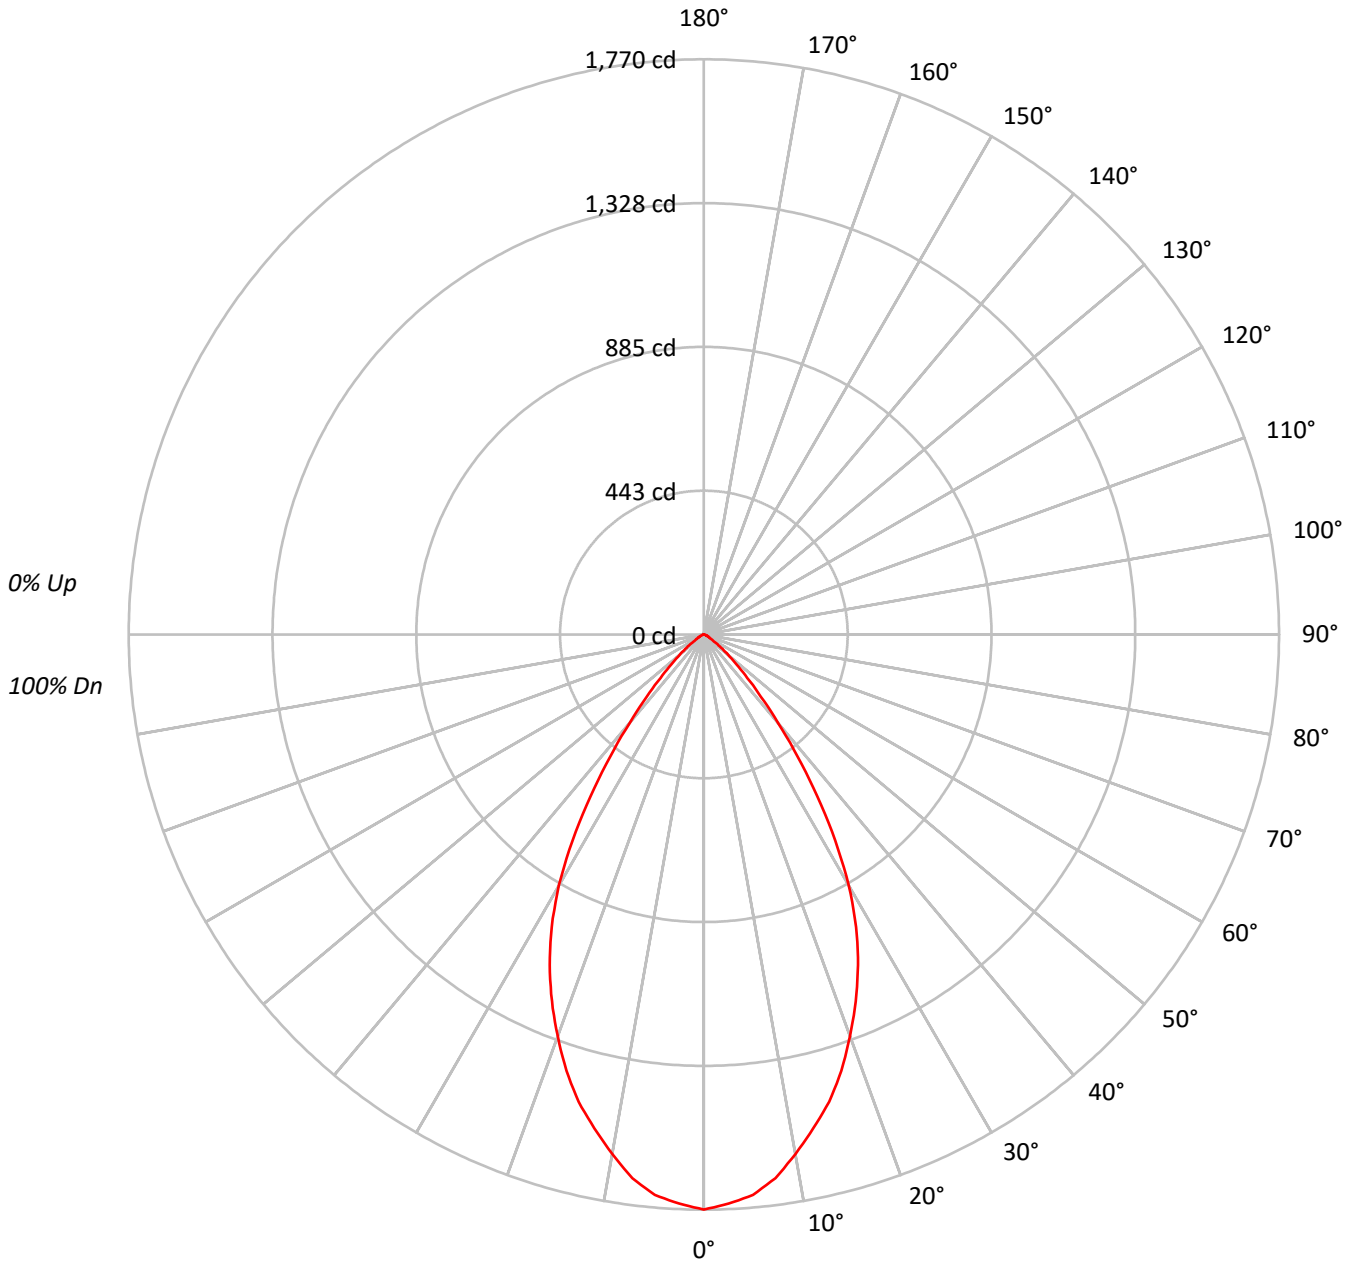



TEST NUMBER: P580078

CATALOG NUMBER: HC420D010-HM40525935-41NDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86	86	86	86
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	81	79	79	79	79
4	96	88	82	78	94	87	81	77	85	80	76	82	79	75	81	77	74	73	73	73	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67	67	67	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	63	63	63	63
7	81	72	65	61	80	71	65	61	70	64	60	68	64	60	67	63	60	58	58	58	58
8	77	67	61	57	76	67	61	56	65	60	56	64	59	56	63	59	56	54	54	54	54
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	60	55	52	51	51	51	51
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48	48	48	48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	218297
5°	214339
10°	203291
15°	190089
20°	172648
25°	152769
30°	127059
35°	91626
40°	57193
45°	32986
50°	18594
55°	8860
60°	5082
65°	3882
70°	2597
75°	1763
80°	1705
85°	1840



TEST NUMBER: P580078

CATALOG NUMBER: HC420D010-HM40525935-41NDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	161.8	9.6
10°-20°	415.3	24.7
20°-30°	510.7	30.3
30°-40°	379.3	22.5
40°-50°	154.2	9.2
50°-60°	42.7	2.5
60°-70°	13.3	0.8
70°-80°	4.5	0.3
80°-90°	1.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1087.8	64.6
0°-40°	1467.1	87.2
0°-60°	1664.0	98.9
0°-90°	1683.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1683.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1770	
5°	1731	162
15°	1489	415
25°	1122	511
35°	608	379
45°	189	154
55°	41	43
65°	13	13
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P580078

CATALOG NUMBER: HC420D010-HM40525935-41NDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1769.8
2.5°	1752.8
5°	1731.1
7.5°	1687.4
10°	1623.1
12.5°	1556.5
15°	1488.6
17.5°	1407.4
20°	1315.3
22.5°	1221.9
25°	1122.5
27.5°	1014.6
30°	892.1
32.5°	752.8
35°	608.5
37.5°	472.8
40°	355.2
42.5°	259.5
45°	189.1
47.5°	135.8
50°	96.9
52.5°	66.6
55°	41.2
57.5°	26.7
60°	20.6
62.5°	17.0
65°	13.3
67.5°	9.7
70°	7.2
72.5°	6.1
75°	3.7
77.5°	2.4
80°	2.4
82.5°	1.3
85°	1.3
87.5°	1.3
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)