

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580113

Luminaire Tested: **HC425D010-HM40525827-41MDH**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580113
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC425D010-HM40525827-41MDH
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2170.2 lumens
Efficiency: N/A
Efficacy: 81.0 lumens/watt
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.91
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 26.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580113

CATALOG NUMBER: HC425D010-HM40525827-41MDH

Luminous Intensity Polar Plot

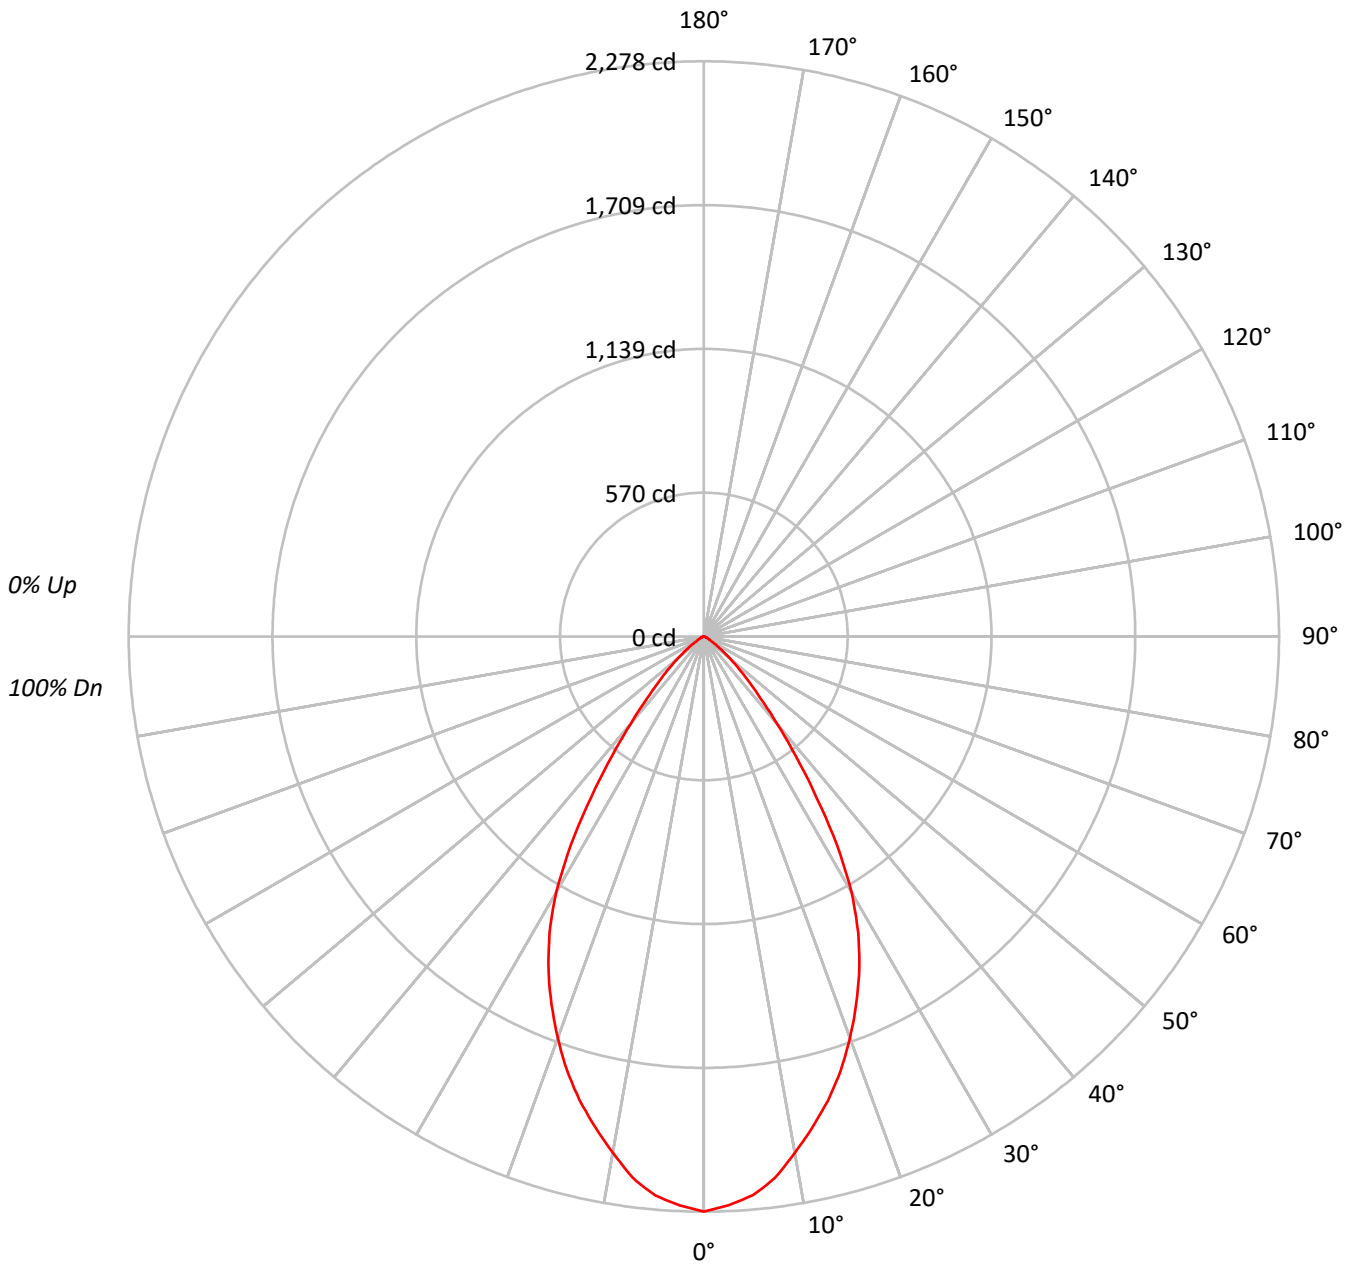



TEST NUMBER: P580113

CATALOG NUMBER: HC425D010-HM40525827-41MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86	86	86	86
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	81	79	79	79	79
4	96	88	82	78	94	87	81	77	85	80	76	82	79	75	81	77	74	73	73	73	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67	67	67	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62	62	62	62
7	81	71	65	61	80	71	65	61	69	64	60	68	63	60	67	63	60	58	58	58	58
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	56	54	54	54	54
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	60	55	52	51	51	51	51
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	47	47	47	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	280957
5°	275071
10°	259966
15°	242790
20°	222055
25°	198293
30°	166526
35°	117149
40°	72264
45°	43260
50°	25502
55°	12688
60°	6537
65°	4320
70°	2633
75°	2097
80°	1065
85°	2123



TEST NUMBER: P580113

CATALOG NUMBER: HC425D010-HM40525827-41MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	207.5	9.6
10°-20°	531.5	24.5
20°-30°	662.8	30.5
30°-40°	488.2	22.5
40°-50°	200.8	9.3
50°-60°	58.7	2.7
60°-70°	15.1	0.7
70°-80°	4.6	0.2
80°-90°	1.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1401.7	64.6
0°-40°	1890.0	87.1
0°-60°	2149.5	99.0
0°-90°	2170.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2170.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2278	
5°	2222	207
15°	1901	531
25°	1457	663
35°	778	488
45°	248	201
55°	59	59
65°	15	15
75°	4	5
85°	2	1
90°	0	



TEST NUMBER: P580113

CATALOG NUMBER: HC425D010-HM40525827-41MDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	2277.8
2.5°	2254.2
5°	2221.6
7.5°	2162.6
10°	2075.6
12.5°	1989.9
15°	1901.3
17.5°	1802.4
20°	1691.7
22.5°	1576.5
25°	1457.0
27.5°	1324.1
30°	1169.2
32.5°	981.7
35°	778.0
37.5°	597.8
40°	448.8
42.5°	332.2
45°	248.0
47.5°	183.0
50°	132.9
52.5°	91.6
55°	59.0
57.5°	35.5
60°	26.5
62.5°	19.2
65°	14.8
67.5°	10.4
70°	7.3
72.5°	5.9
75°	4.4
77.5°	2.9
80°	1.5
82.5°	1.5
85°	1.5
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)