

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580134

Luminaire Tested: **HC4R25D010-HM40525830-42RMDC**

Issue Date: 9/23/2021

Test Information

Test Method: LM-41-14
Report Number: P580134
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-13)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/23/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC4R25D010-HM40525830-42RMDC
Description: HALO COMMERCIAL 4" ROUND, RETROFIT FRAME, WITH 4" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2480.1 lumens
Efficiency: N/A
Efficacy: 92.5 lumens/watt
Spacing Criteria (0/90/45): 1.02 / 1.02 / 0.96
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 26.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580134

CATALOG NUMBER: HC4R25D010-HM40525830-42RMDC

Luminous Intensity Polar Plot

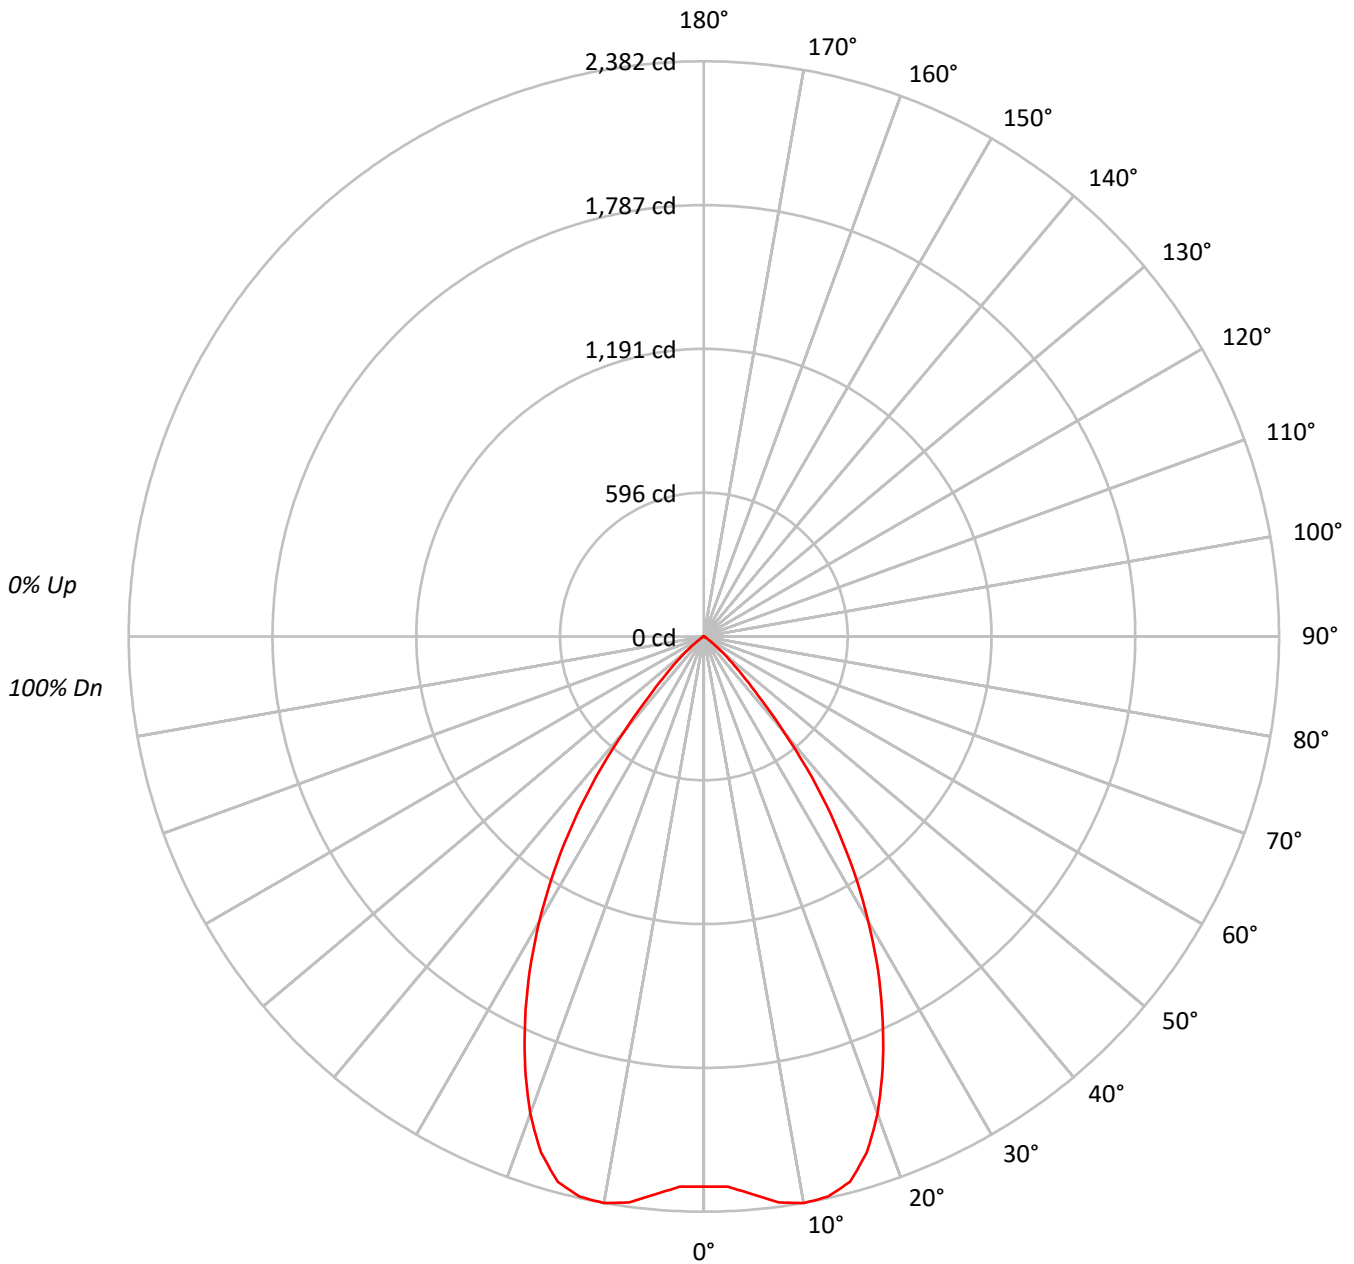



TEST NUMBER: P580134

CATALOG NUMBER: HC4R25D010-HM40525830-42RMDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	74			
5	92	83	77	73	90	82	76	72	80	75	72	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64			
7	82	73	66	62	81	72	66	62	71	65	62	69	65	61	68	64	61	60			
8	78	68	62	58	77	68	62	58	67	61	57	65	61	57	65	60	57	56			
9	74	64	58	54	73	64	58	54	63	57	54	62	57	54	61	57	53	52			
10	70	61	55	51	69	60	54	51	59	54	50	58	54	50	58	53	50	49			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	281043
5°	287069
10°	298404
15°	298517
20°	275991
25°	238496
30°	194043
35°	142536
40°	82392
45°	38481
50°	17788
55°	6193
60°	1974
65°	1372
70°	1154
75°	763
80°	0
85°	0



TEST NUMBER: P580134

CATALOG NUMBER: HC4R25D010-HM40525830-42RMDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	223.7	9.0
10°-20°	647.9	26.1
20°-30°	797.9	32.2
30°-40°	582.5	23.5
40°-50°	189.8	7.7
50°-60°	31.7	1.3
60°-70°	4.9	0.2
70°-80°	1.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1669.4	67.3
0°-40°	2251.9	90.8
0°-60°	2473.5	99.7
0°-90°	2480.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2480.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2278	
5°	2318	224
15°	2338	648
25°	1752	798
35°	947	583
45°	221	190
55°	29	32
65°	5	5
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P580134

CATALOG NUMBER: HC4R25D010-HM40525830-42RMDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	2278.5
2.5°	2280.1
5°	2318.5
7.5°	2363.3
10°	2382.5
12.5°	2376.1
15°	2337.7
17.5°	2241.7
20°	2102.6
22.5°	1934.8
25°	1752.4
27.5°	1562.2
30°	1362.4
32.5°	1157.7
35°	946.6
37.5°	734.0
40°	511.7
42.5°	334.2
45°	220.6
47.5°	145.5
50°	92.7
52.5°	54.4
55°	28.8
57.5°	11.2
60°	8.0
62.5°	6.4
65°	4.7
67.5°	3.2
70°	3.2
72.5°	1.6
75°	1.6
77.5°	1.6
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)