

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580135

Luminaire Tested: **HC425D010-HM40525830-41MDC**

Issue Date: 9/9/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P580135  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-4)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC425D010-HM40525830-41MDC  
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" MEDIUM DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2468.9 lumens  
Efficiency: N/A  
Efficacy: 92.1 lumens/watt  
Spacing Criteria (0/90/45): 1 / 1 / 0.96  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 26.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P580135  
CATALOG NUMBER: HC425D010-HM40525830-41MDC

### Luminous Intensity Polar Plot

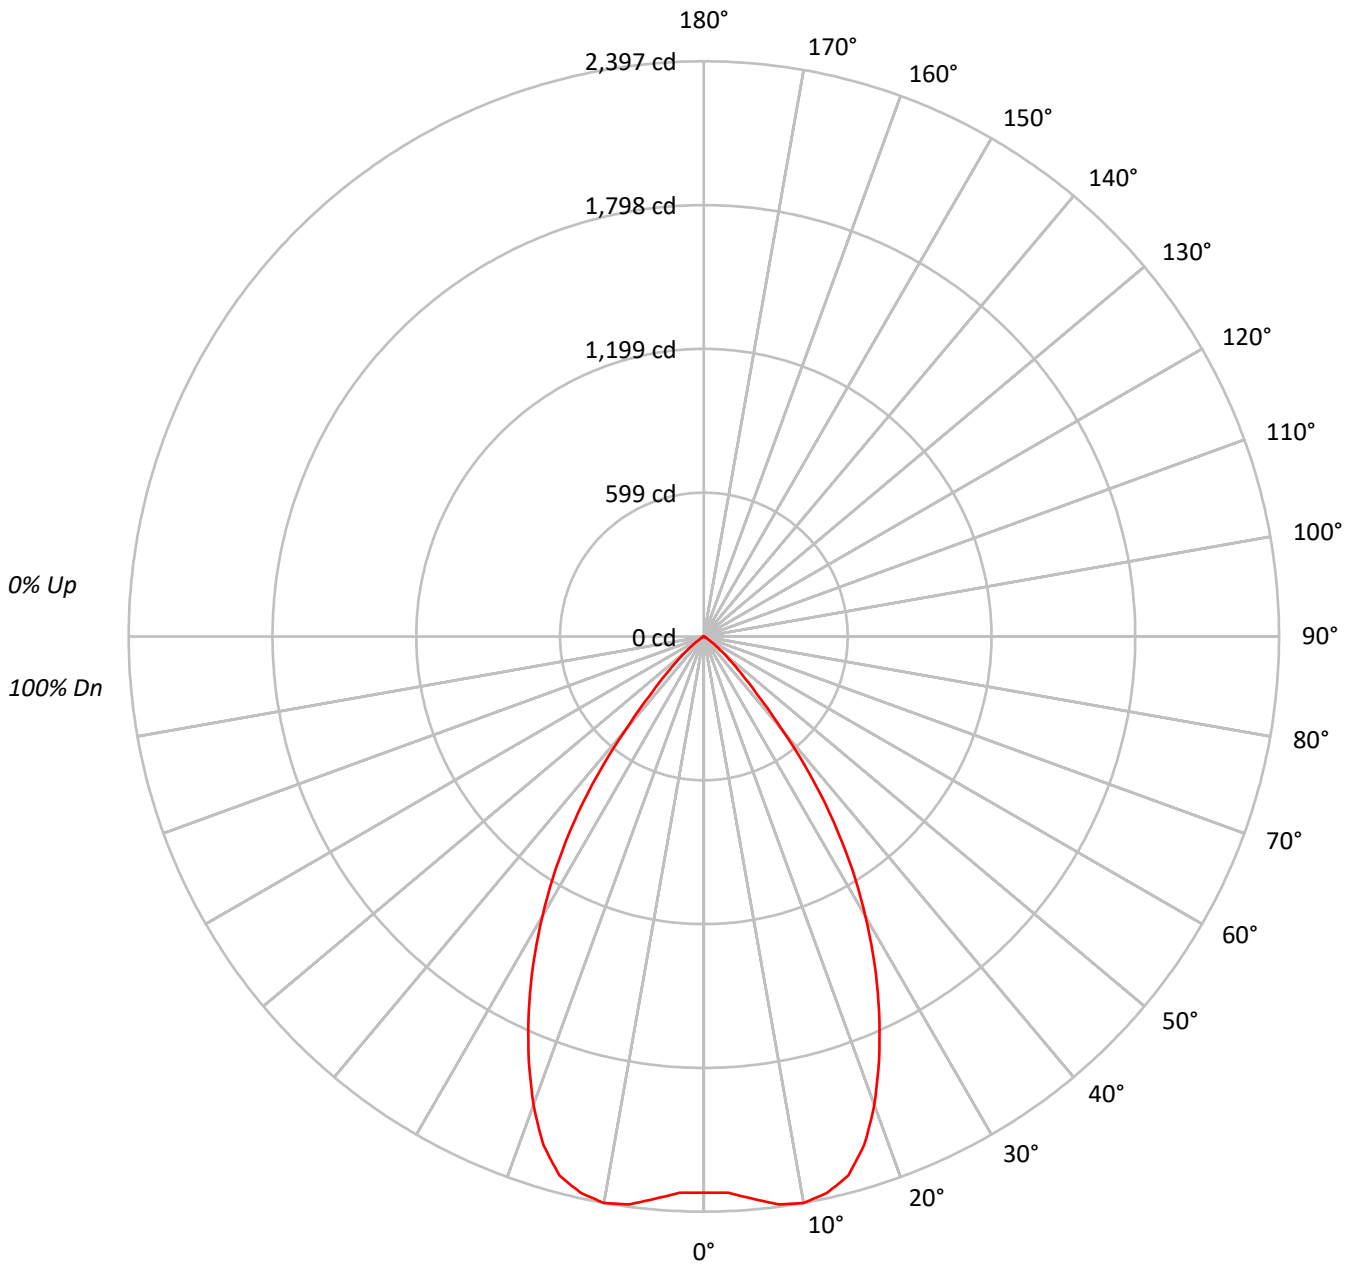



TEST NUMBER: P580135

CATALOG NUMBER: HC425D010-HM40525830-41MDC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	98	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	74			
5	91	83	77	72	90	82	76	72	80	75	72	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64			
7	82	73	66	62	81	72	66	62	71	65	62	69	65	61	68	64	61	60			
8	78	68	62	58	77	68	62	58	67	61	57	65	61	57	64	60	57	56			
9	74	64	58	54	73	64	58	54	63	57	54	62	57	54	61	57	53	52			
10	70	61	55	51	69	60	54	51	59	54	50	58	54	50	58	53	50	49			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	285965
5°	291217
10°	300208
15°	296869
20°	272604
25°	235175
30°	191664
35°	141904
40°	81410
45°	39353
50°	18748
55°	6537
60°	2368
65°	1430
70°	1154
75°	763
80°	0
85°	0



TEST NUMBER: P580135

CATALOG NUMBER: HC425D010-HM40525830-41MDC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	226.2	9.2
10°-20°	644.5	26.1
20°-30°	787.1	31.9
30°-40°	578.6	23.4
40°-50°	191.8	7.8
50°-60°	33.9	1.4
60°-70°	5.1	0.2
70°-80°	1.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1657.8	67.1
0°-40°	2236.4	90.6
0°-60°	2462.1	99.7
0°-90°	2468.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2468.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2318	
5°	2352	226
15°	2325	645
25°	1728	787
35°	942	579
45°	226	192
55°	30	34
65°	5	5
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P580135

CATALOG NUMBER: HC425D010-HM40525830-41MDC

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2318.4
2.5°	2320.1
5°	2352.0
7.5°	2387.3
10°	2396.9
12.5°	2374.4
15°	2324.8
17.5°	2222.4
20°	2076.8
22.5°	1907.2
25°	1728.0
27.5°	1540.9
30°	1345.7
32.5°	1150.5
35°	942.4
37.5°	731.3
40°	505.6
42.5°	334.4
45°	225.6
47.5°	150.4
50°	97.7
52.5°	57.6
55°	30.4
57.5°	12.8
60°	9.6
62.5°	6.4
65°	4.9
67.5°	3.2
70°	3.2
72.5°	1.6
75°	1.6
77.5°	1.6
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)