

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580136

Luminaire Tested: **HC425D010-HM40525830-41NDC**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580136
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-1)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC425D010-HM40525830-41NDC
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" NARROW DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2366.6 lumens
Efficiency: N/A
Efficacy: 88.3 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 26.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580136

CATALOG NUMBER: HC425D010-HM40525830-41NDC

Luminous Intensity Polar Plot

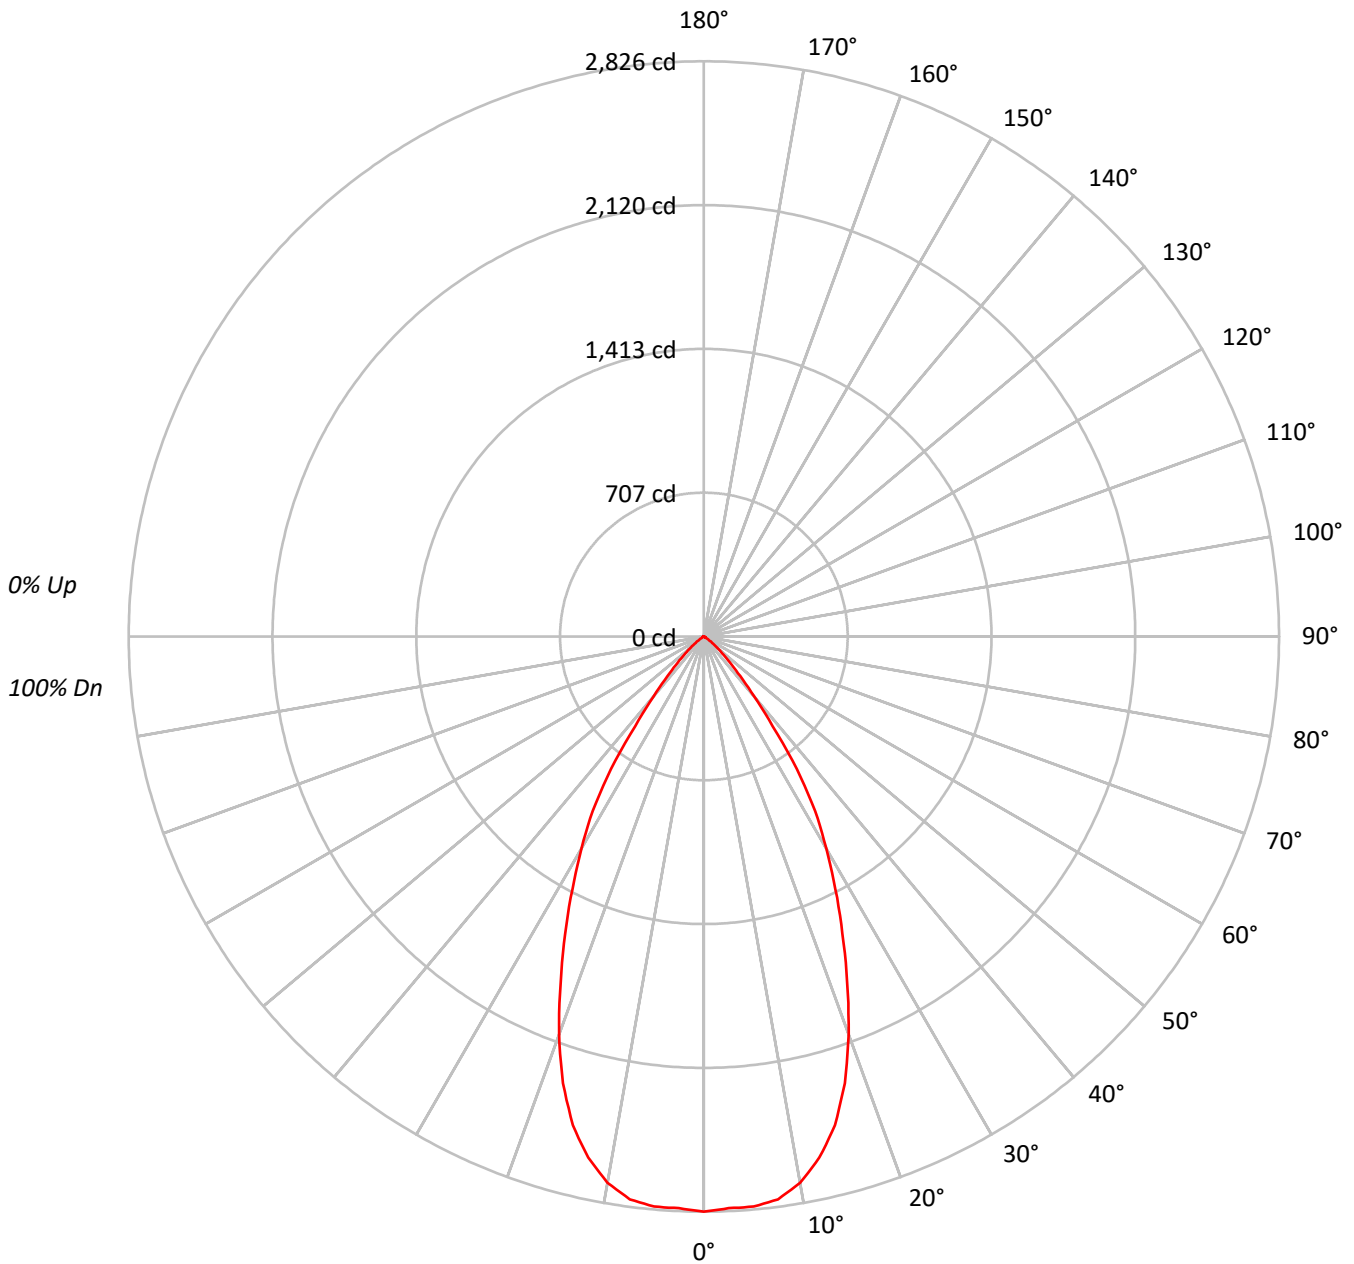



TEST NUMBER: P580136

CATALOG NUMBER: HC425D010-HM40525830-41NDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94	94	94	94
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	93	91	89	87	87	87	87
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81	81	81	81
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76	76	76	76
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71	71	71	71
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62	62	62	62
8	80	70	64	60	78	70	64	60	69	64	60	68	63	60	67	62	59	58	58	58	58
9	76	66	61	57	75	66	60	57	65	60	56	64	59	56	63	59	56	55	55	55	55
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	51	51	51	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	348575
5°	348111
10°	341340
15°	317390
20°	272959
25°	219279
30°	171198
35°	119844
40°	61524
45°	31242
50°	15639
55°	5849
60°	2368
65°	1868
70°	1154
75°	763
80°	1137
85°	0



TEST NUMBER: P580136

CATALOG NUMBER: HC425D010-HM40525830-41NDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	265.8	11.2
10°-20°	686.1	29.0
20°-30°	739.1	31.2
30°-40°	485.6	20.5
40°-50°	151.0	6.4
50°-60°	29.6	1.3
60°-70°	6.3	0.3
70°-80°	2.3	0.1
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1691.0	71.5
0°-40°	2176.6	92.0
0°-60°	2357.3	99.6
0°-90°	2366.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2366.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2826	
5°	2812	266
15°	2486	686
25°	1611	739
35°	796	486
45°	179	151
55°	27	30
65°	6	6
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P580136

CATALOG NUMBER: HC425D010-HM40525830-41NDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	2826.0
2.5°	2811.5
5°	2811.5
7.5°	2789.2
10°	2725.3
12.5°	2623.0
15°	2485.5
17.5°	2301.7
20°	2079.5
22.5°	1839.7
25°	1611.2
27.5°	1398.6
30°	1202.0
32.5°	1016.6
35°	795.9
37.5°	554.7
40°	382.1
42.5°	263.7
45°	179.1
47.5°	121.5
50°	81.5
52.5°	51.1
55°	27.2
57.5°	11.2
60°	9.6
62.5°	8.0
65°	6.4
67.5°	4.7
70°	3.2
72.5°	3.2
75°	1.6
77.5°	1.6
80°	1.6
82.5°	1.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)