

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580150

Luminaire Tested: **HC425D010-HM40525835-41NDH**

Issue Date: 9/9/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P580150  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-2)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC425D010-HM40525835-41NDH  
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" NARROW DISTRIBUTION, HAZE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2300.5 lumens  
Efficiency: N/A  
Efficacy: 85.8 lumens/watt  
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.91  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 26.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P580150  
CATALOG NUMBER: HC425D010-HM40525835-41NDH

### Luminous Intensity Polar Plot

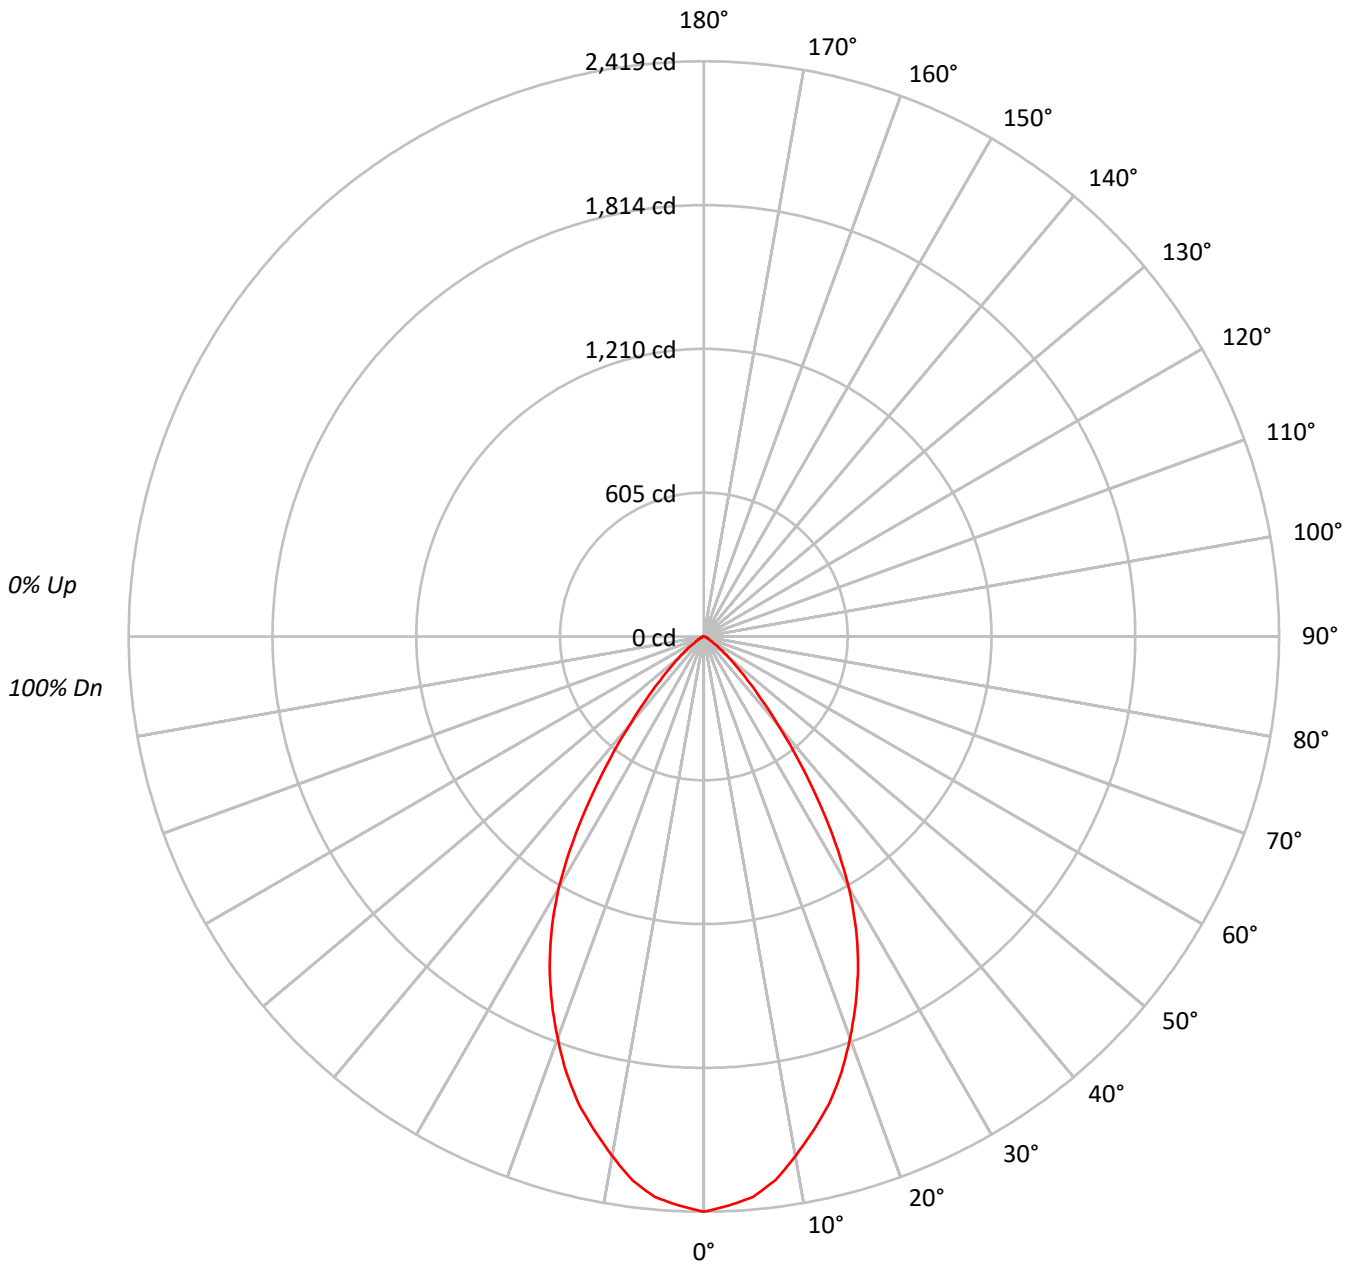



TEST NUMBER: P580150

CATALOG NUMBER: HC425D010-HM40525835-41NDH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86	86	86	86
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	81	79	79	79	79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	74	73	73	73	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67	67	67	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	63	63	63	63
7	81	72	65	61	80	71	65	61	70	64	60	68	64	60	67	63	60	58	58	58	58
8	77	67	61	57	76	67	61	56	65	60	56	64	59	56	63	59	56	54	54	54	54
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	60	55	52	51	51	51	51
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48	48	48	48

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	298385
5°	292951
10°	277876
15°	259825
20°	235969
25°	208813
30°	173690
35°	125235
40°	78173
45°	45075
50°	25426
55°	12107
60°	6932
65°	5312
70°	3570
75°	2383
80°	2344
85°	2406



TEST NUMBER: P580150

CATALOG NUMBER: HC425D010-HM40525835-41NDH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	221.2	9.6
10°-20°	567.6	24.7
20°-30°	698.1	30.3
30°-40°	518.5	22.5
40°-50°	210.8	9.2
50°-60°	58.3	2.5
60°-70°	18.1	0.8
70°-80°	6.1	0.3
80°-90°	1.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1486.9	64.6
0°-40°	2005.3	87.2
0°-60°	2274.4	98.9
0°-90°	2300.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2300.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2419	
5°	2366	221
15°	2035	568
25°	1534	698
35°	832	518
45°	258	211
55°	56	58
65°	18	18
75°	5	6
85°	2	2
90°	0	



TEST NUMBER: P580150

CATALOG NUMBER: HC425D010-HM40525835-41NDH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2419.1
2.5°	2396.0
5°	2366.0
7.5°	2306.4
10°	2218.6
12.5°	2127.5
15°	2034.7
17.5°	1923.7
20°	1797.7
22.5°	1670.1
25°	1534.3
27.5°	1386.9
30°	1219.5
32.5°	1029.0
35°	831.7
37.5°	646.2
40°	485.5
42.5°	354.6
45°	258.4
47.5°	185.6
50°	132.5
52.5°	91.1
55°	56.3
57.5°	36.5
60°	28.1
62.5°	23.1
65°	18.2
67.5°	13.2
70°	9.9
72.5°	8.2
75°	5.0
77.5°	3.3
80°	3.3
82.5°	1.7
85°	1.7
87.5°	1.7
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)