

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P592698

Luminaire Tested: **HC425D010-HM40525850-41MDC**

Issue Date: 9/9/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P592698  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-4)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC425D010-HM40525850-41MDC  
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" MEDIUM DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 5000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2629.8 lumens  
Efficiency: N/A  
Efficacy: 98.1 lumens/watt  
Spacing Criteria (0/90/45): 1 / 1 / 0.96  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 26.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P592698

CATALOG NUMBER: HC425D010-HM40525850-41MDC

### Luminous Intensity Polar Plot

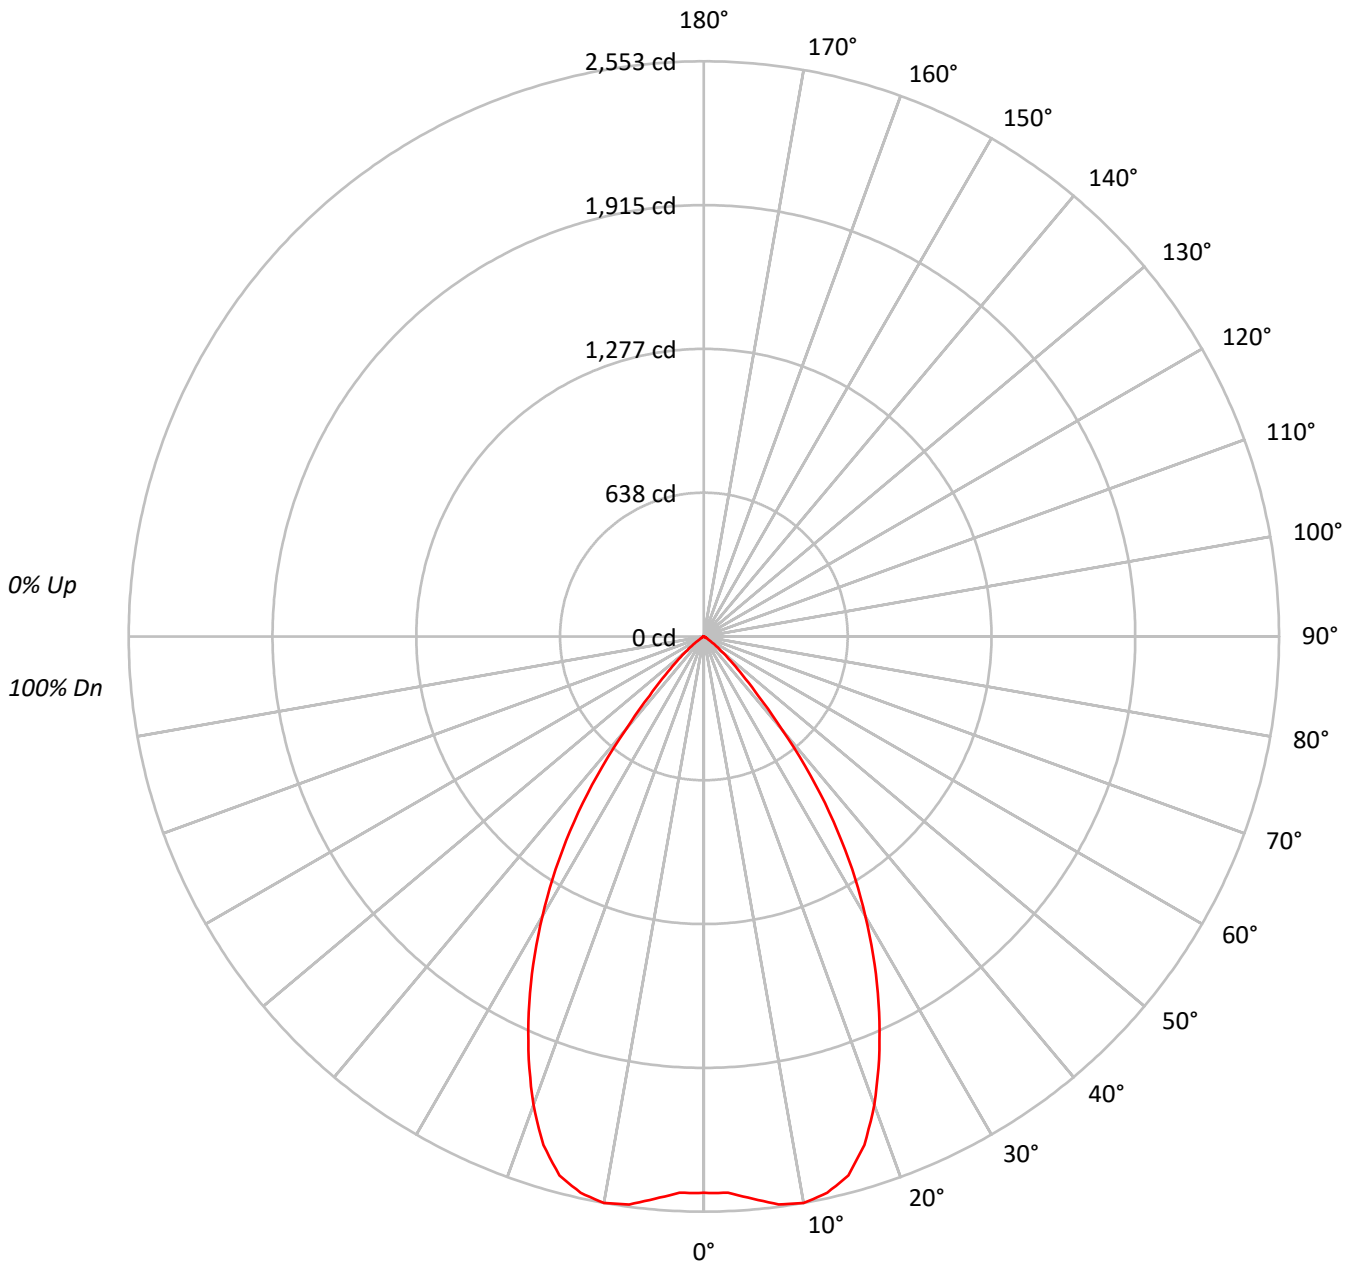



TEST NUMBER: P592698

CATALOG NUMBER: HC425D010-HM40525850-41MDC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	74			
5	91	83	77	72	90	82	76	72	80	75	72	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64			
7	82	73	66	62	81	72	66	62	71	65	62	69	65	61	68	64	61	60			
8	78	68	62	58	77	68	62	58	67	61	57	65	61	57	65	60	57	56			
9	74	64	58	54	73	64	58	54	63	57	54	62	57	54	61	57	53	52			
10	70	61	55	51	69	60	54	51	59	54	50	58	54	50	58	53	50	49			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	304614
5°	310211
10°	319759
15°	316216
20°	290377
25°	250500
30°	204141
35°	151149
40°	86707
45°	41917
50°	19957
55°	6968
60°	2541
65°	1488
70°	1226
75°	810
80°	0
85°	0



TEST NUMBER: P592698

CATALOG NUMBER: HC425D010-HM40525850-41MDC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	241.0	9.2
10°-20°	686.5	26.1
20°-30°	838.3	31.9
30°-40°	616.3	23.4
40°-50°	204.3	7.8
50°-60°	36.1	1.4
60°-70°	5.5	0.2
70°-80°	1.8	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1765.8	67.1
0°-40°	2382.1	90.6
0°-60°	2622.5	99.7
0°-90°	2629.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2629.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2470	
5°	2505	241
15°	2476	687
25°	1841	838
35°	1004	616
45°	240	204
55°	32	36
65°	5	5
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P592698

CATALOG NUMBER: HC425D010-HM40525850-41MDC

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2469.6
2.5°	2471.3
5°	2505.4
7.5°	2542.8
10°	2553.0
12.5°	2529.2
15°	2476.3
17.5°	2367.3
20°	2212.2
22.5°	2031.5
25°	1840.6
27.5°	1641.2
30°	1433.3
32.5°	1225.4
35°	1003.8
37.5°	778.9
40°	538.5
42.5°	356.2
45°	240.3
47.5°	160.2
50°	104.0
52.5°	61.3
55°	32.4
57.5°	13.7
60°	10.3
62.5°	6.8
65°	5.1
67.5°	3.4
70°	3.4
72.5°	1.7
75°	1.7
77.5°	1.7
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)