

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580190

Luminaire Tested: **HC425D010-HM40525927-41NDC**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580190
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-1)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC425D010-HM40525927-41NDC
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" NARROW DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1869.2 lumens
Efficiency: N/A
Efficacy: 69.7 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 26.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580190

CATALOG NUMBER: HC425D010-HM40525927-41NDC

Luminous Intensity Polar Plot

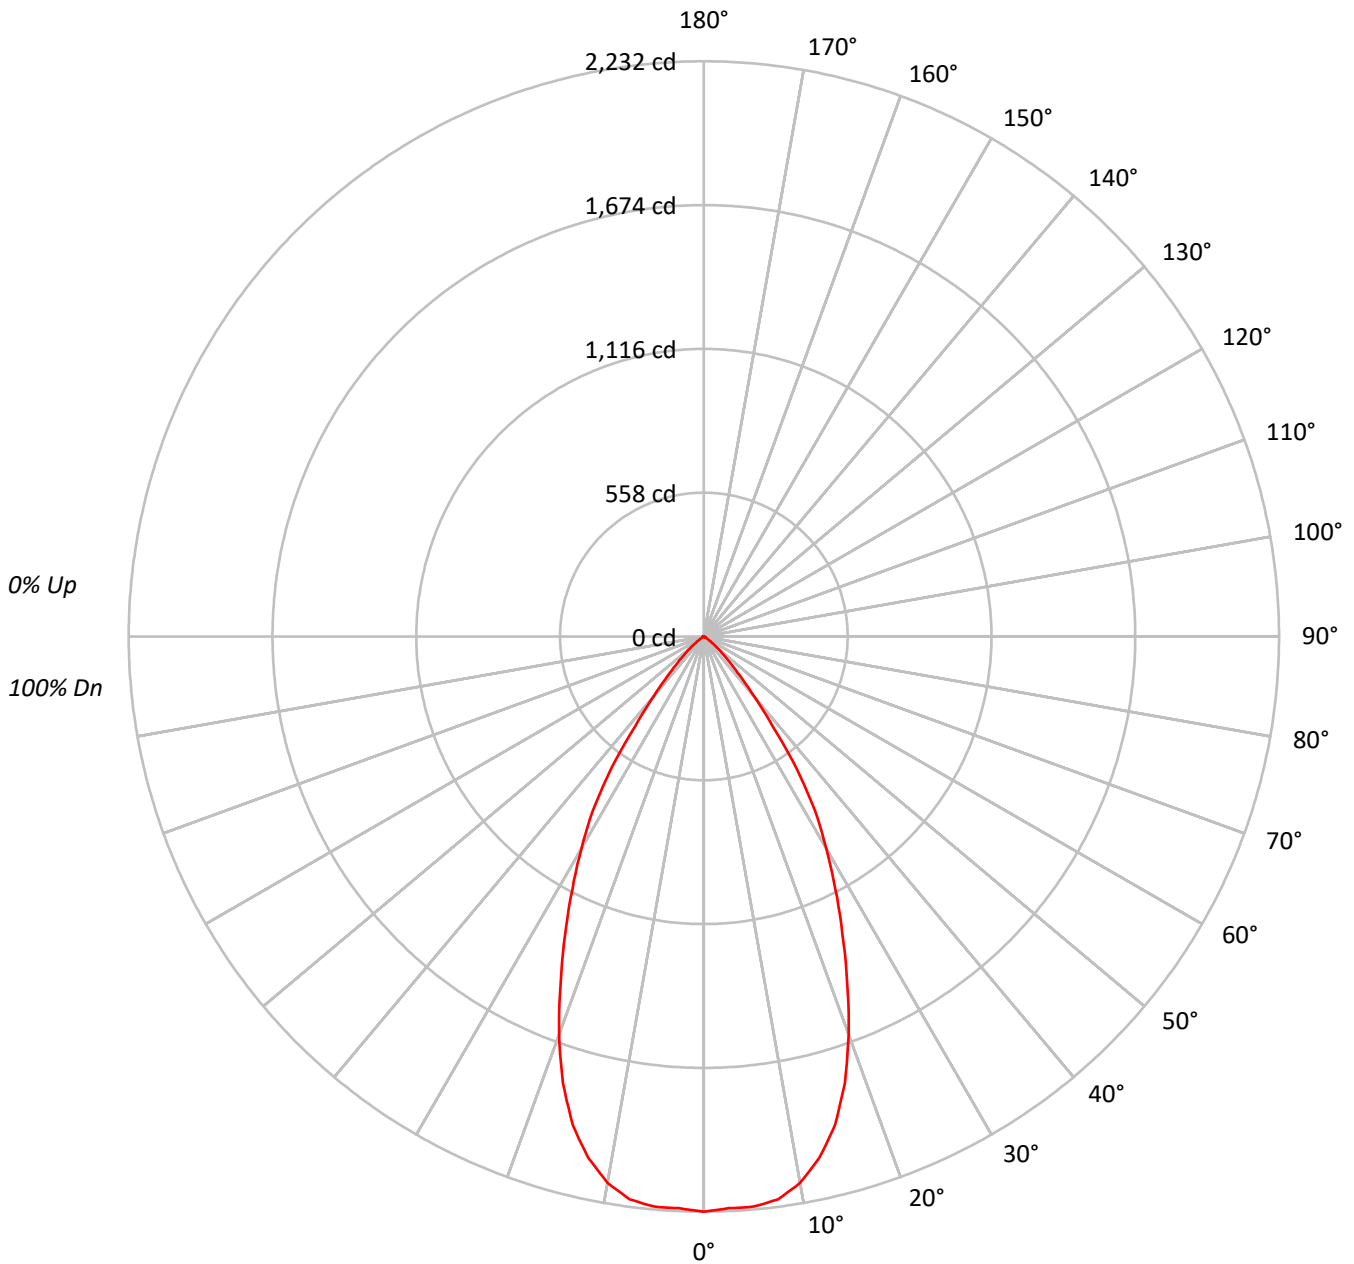



TEST NUMBER: P580190

CATALOG NUMBER: HC425D010-HM40525927-41NDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	93	91	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76			
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71			
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66			
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62			
8	80	70	64	60	78	70	64	60	69	64	60	68	63	60	67	62	59	58			
9	76	66	61	57	75	66	60	57	65	60	56	64	59	56	63	59	56	55			
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	52			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	275320
5°	274985
10°	269622
15°	250694
20°	215610
25°	173197
30°	135235
35°	94668
40°	48595
45°	24665
50°	12358
55°	4624
60°	1875
65°	1488
70°	902
75°	572
80°	852
85°	0



TEST NUMBER: P580190

CATALOG NUMBER: HC425D010-HM40525927-41NDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	210.0	11.2
10°-20°	541.9	29.0
20°-30°	583.8	31.2
30°-40°	383.6	20.5
40°-50°	119.3	6.4
50°-60°	23.4	1.3
60°-70°	5.0	0.3
70°-80°	1.8	0.1
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1335.7	71.5
0°-40°	1719.3	92.0
0°-60°	1862.0	99.6
0°-90°	1869.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1869.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2232	
5°	2221	210
15°	1963	542
25°	1273	584
35°	629	384
45°	141	119
55°	22	23
65°	5	5
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P580190

CATALOG NUMBER: HC425D010-HM40525927-41NDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	2232.1
2.5°	2220.9
5°	2220.9
7.5°	2203.1
10°	2152.7
12.5°	2071.8
15°	1963.2
17.5°	1818.0
20°	1642.6
22.5°	1453.2
25°	1272.6
27.5°	1104.7
30°	949.5
32.5°	802.9
35°	628.7
37.5°	438.1
40°	301.8
42.5°	208.3
45°	141.4
47.5°	96.0
50°	64.4
52.5°	40.4
55°	21.5
57.5°	8.8
60°	7.6
62.5°	6.3
65°	5.1
67.5°	3.8
70°	2.5
72.5°	2.5
75°	1.2
77.5°	1.2
80°	1.2
82.5°	1.2
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)