

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580205

Luminaire Tested: **HC425D010-HM40525930-41WDH**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580205
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-8)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC425D010-HM40525930-41WDH
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2244.1 lumens
Efficiency: N/A
Efficacy: 83.7 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.11
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 26.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580205

CATALOG NUMBER: HC425D010-HM40525930-41WDH

Luminous Intensity Polar Plot

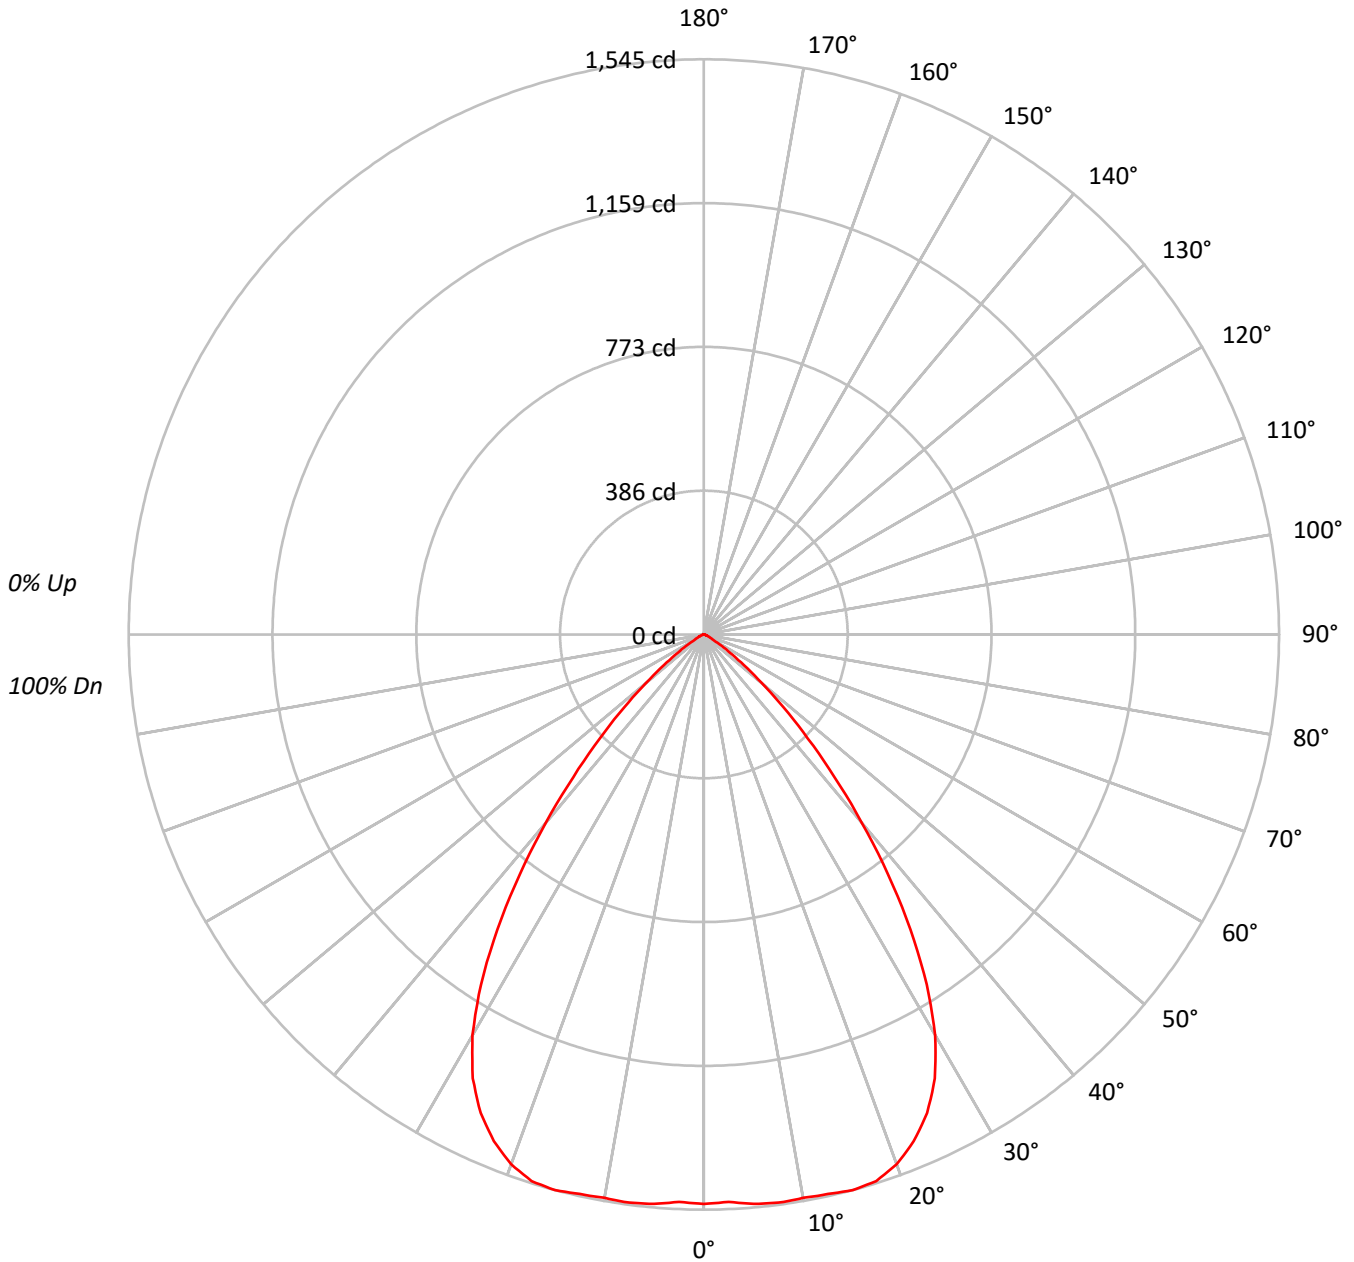



TEST NUMBER: P580205

CATALOG NUMBER: HC425D010-HM40525930-41WDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	108	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	86	84	84	84	84
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	81	78	76	76	76	76
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69	69	69	69
5	88	79	72	67	86	78	72	67	76	70	66	74	69	66	72	68	65	63	63	63	63
6	83	73	66	61	81	72	66	61	70	65	61	69	64	60	68	63	60	58	58	58	58
7	78	68	61	56	77	67	60	56	65	60	55	64	59	55	63	58	55	53	53	53	53
8	74	63	56	51	72	62	56	51	61	55	51	60	55	51	59	54	51	49	49	49	49
9	69	59	52	47	68	58	52	47	57	51	47	56	51	47	55	50	47	45	45	45	45
10	66	55	48	44	65	54	48	44	53	48	44	53	47	44	52	47	43	42	42	42	42

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	188682
5°	190096
10°	192469
15°	197304
20°	198756
25°	193067
30°	177023
35°	145653
40°	106174
45°	68903
50°	38839
55°	18451
60°	7302
65°	4524
70°	3065
75°	2002
80°	994
85°	1981



TEST NUMBER: P580205

CATALOG NUMBER: HC425D010-HM40525930-41WDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.6	6.5
10°-20°	435.6	19.4
20°-30°	646.1	28.8
30°-40°	596.8	26.6
40°-50°	311.6	13.9
50°-60°	85.4	3.8
60°-70°	16.5	0.7
70°-80°	4.6	0.2
80°-90°	1.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1228.3	54.7
0°-40°	1825.1	81.3
0°-60°	2222.1	99.0
0°-90°	2244.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2244.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1530	
5°	1535	147
15°	1545	436
25°	1419	646
35°	967	597
45°	395	312
55°	86	85
65°	16	16
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P580205

CATALOG NUMBER: HC425D010-HM40525930-41WDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1529.7
2.5°	1525.5
5°	1535.3
7.5°	1539.5
10°	1536.7
12.5°	1539.5
15°	1545.1
17.5°	1539.5
20°	1514.2
22.5°	1473.5
25°	1418.6
27.5°	1344.1
30°	1242.9
32.5°	1114.9
35°	967.3
37.5°	812.7
40°	659.4
42.5°	518.8
45°	395.0
47.5°	289.6
50°	202.4
52.5°	135.0
55°	85.8
57.5°	50.6
60°	29.6
62.5°	21.1
65°	15.5
67.5°	11.3
70°	8.5
72.5°	5.6
75°	4.2
77.5°	2.8
80°	1.4
82.5°	1.4
85°	1.4
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)