

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580227

Luminaire Tested: **HC425D010-HM40525935-41WDC**

Issue Date: 9/9/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P580227  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-7)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC425D010-HM40525935-41WDC  
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2511.9 lumens  
Efficiency: N/A  
Efficacy: 93.7 lumens/watt  
Spacing Criteria (0/90/45): 1.25 / 1.25 / 1.11  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 26.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P580227

CATALOG NUMBER: HC425D010-HM40525935-41WDC

### Luminous Intensity Polar Plot

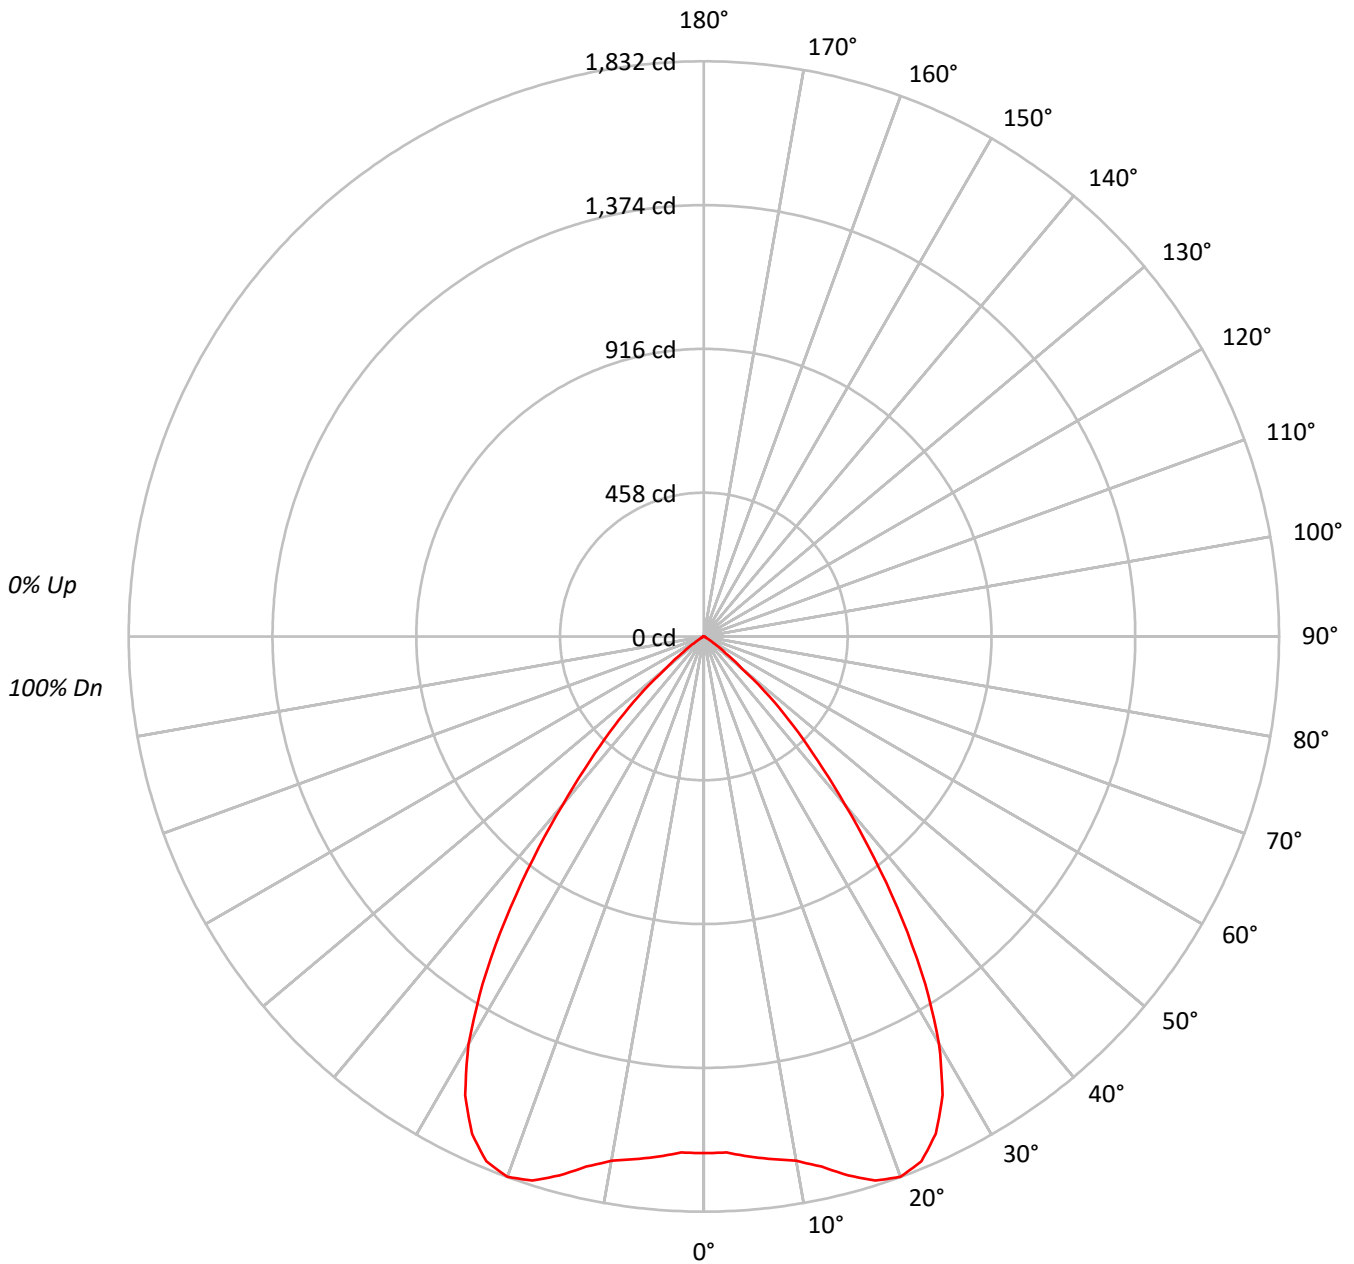



TEST NUMBER: P580227

CATALOG NUMBER: HC425D010-HM40525935-41WDC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92	92	92	92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85	85	85	85
3	101	93	88	84	98	92	87	83	89	85	82	87	83	80	85	82	79	77	77	77	77
4	95	86	80	76	93	85	79	75	83	78	74	81	77	73	79	75	72	71	71	71	71
5	89	80	73	69	87	79	73	68	77	72	68	75	71	67	74	70	66	65	65	65	65
6	84	74	67	63	82	73	67	62	72	66	62	70	65	62	69	65	61	60	60	60	60
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55	55	55	55
8	75	64	57	53	73	63	57	53	62	57	53	61	56	52	60	56	52	51	51	51	51
9	70	60	53	49	69	59	53	49	58	53	49	57	52	48	56	52	48	47	47	47	47
10	67	56	50	45	66	55	49	45	55	49	45	54	49	45	53	48	45	43	43	43	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	202928
5°	205895
10°	212359
15°	226904
20°	240432
25°	237816
30°	213427
35°	166102
40°	112550
45°	70263
50°	30396
55°	10193
60°	2566
65°	1722
70°	1046
75°	715
80°	1065
85°	0



TEST NUMBER: P580227

CATALOG NUMBER: HC425D010-HM40525935-41WDC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	159.7	6.4
10°-20°	504.4	20.1
20°-30°	790.4	31.5
30°-40°	682.1	27.2
40°-50°	313.7	12.5
50°-60°	53.3	2.1
60°-70°	6.0	0.2
70°-80°	2.1	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1454.5	57.9
0°-40°	2136.6	85.1
0°-60°	2503.6	99.7
0°-90°	2511.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2511.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1645	
5°	1663	160
15°	1777	504
25°	1747	790
35°	1103	682
45°	403	314
55°	47	53
65°	6	6
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P580227

CATALOG NUMBER: HC425D010-HM40525935-41WDC

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1645.2
2.5°	1645.2
5°	1662.9
7.5°	1679.2
10°	1695.5
12.5°	1729.5
15°	1776.9
17.5°	1816.9
20°	1831.7
22.5°	1809.6
25°	1747.4
27.5°	1646.6
30°	1498.5
32.5°	1312.0
35°	1103.1
37.5°	892.9
40°	699.0
42.5°	534.6
45°	402.8
47.5°	282.8
50°	158.4
52.5°	87.4
55°	47.4
57.5°	23.7
60°	10.4
62.5°	7.5
65°	5.9
67.5°	4.4
70°	2.9
72.5°	2.9
75°	1.5
77.5°	1.5
80°	1.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)