

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580300

Luminaire Tested: **HC430D010-HM43040835-41MDW**

Issue Date: 9/9/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P580300  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-6)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC430D010-HM43040835-41MDW  
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" MEDIUM DISTRIBUTION, WHITE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2841.5 lumens  
Efficiency: N/A  
Efficacy: 101.5 lumens/watt  
Spacing Criteria (0/90/45): 1.04 / 1.04 / 1.01  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P580300

CATALOG NUMBER: HC430D010-HM43040835-41MDW

### Luminous Intensity Polar Plot

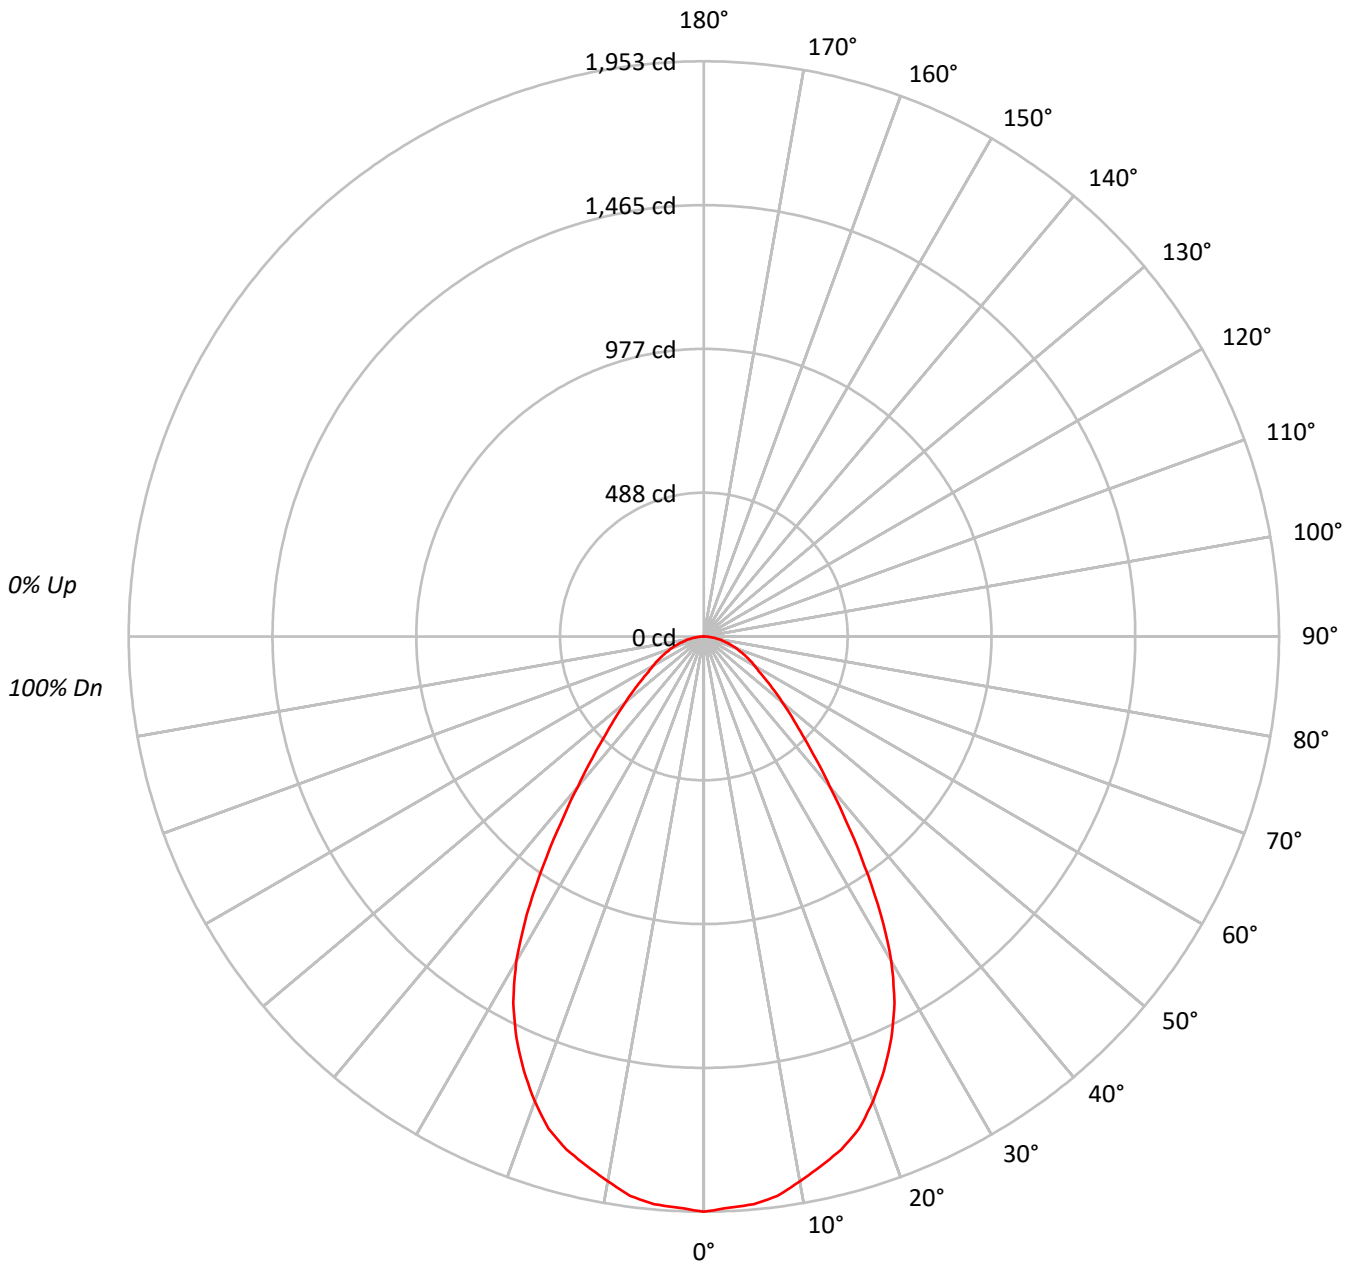



TEST NUMBER: P580300

CATALOG NUMBER: HC430D010-HM43040835-41MDW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	108	104	101	109	105	102	100	101	99	97	97	95	94	94	92	91	89			89
2	104	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	81	79			79
3	97	88	82	76	94	87	81	76	84	79	75	81	77	73	79	75	72	70			70
4	90	80	73	68	88	79	73	67	77	71	67	75	70	66	73	68	65	63			63
5	84	74	66	61	82	73	66	61	71	65	60	69	64	59	67	63	59	57			57
6	79	68	60	55	77	67	60	55	65	59	54	64	58	54	62	57	54	52			52
7	74	63	55	50	73	62	55	50	61	54	50	59	54	49	58	53	49	47			47
8	70	58	51	46	68	58	51	46	56	50	46	55	50	45	54	49	45	44			44
9	66	54	47	42	65	54	47	42	53	46	42	52	46	42	51	46	42	40			40
10	62	51	44	39	61	50	44	39	49	43	39	48	43	39	48	42	39	37			37

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	240894
5°	239623
10°	235242
15°	230276
20°	220441
25°	204975
30°	181410
35°	143184
40°	107140
45°	82422
50°	66855
55°	55461
60°	49067
65°	45414
70°	41906
75°	38507
80°	34948
85°	27880



TEST NUMBER: P580300

CATALOG NUMBER: HC430D010-HM43040835-41MDW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	183.0	6.4
10°-20°	505.7	17.8
20°-30°	686.7	24.2
30°-40°	594.9	20.9
40°-50°	373.4	13.1
50°-60°	234.9	8.3
60°-70°	154.4	5.4
70°-80°	85.2	3.0
80°-90°	23.3	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1375.4	48.4
0°-40°	1970.3	69.3
0°-60°	2578.6	90.7
0°-90°	2841.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2841.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1953	
5°	1935	183
15°	1803	506
25°	1506	687
35°	951	595
45°	472	373
55°	258	235
65°	156	154
75°	81	85
85°	20	23
90°	0	



TEST NUMBER: P580300

CATALOG NUMBER: HC430D010-HM43040835-41MDW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1953.0
2.5°	1941.2
5°	1935.3
7.5°	1915.6
10°	1878.2
12.5°	1840.8
15°	1803.3
17.5°	1752.2
20°	1679.4
22.5°	1596.7
25°	1506.1
27.5°	1401.8
30°	1273.7
32.5°	1118.3
35°	950.9
37.5°	797.4
40°	665.4
42.5°	561.1
45°	472.5
47.5°	405.5
50°	348.4
52.5°	299.3
55°	257.9
57.5°	222.4
60°	198.9
62.5°	177.2
65°	155.6
67.5°	133.9
70°	116.2
72.5°	96.4
75°	80.8
77.5°	63.1
80°	49.2
82.5°	33.5
85°	19.7
87.5°	7.9
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)