

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580316

Luminaire Tested: **HC430D010-HM43040840-41NDC**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580316
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-1)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC430D010-HM43040840-41NDC
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" NARROW DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3047.0 lumens
Efficiency: N/A
Efficacy: 108.8 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580316

CATALOG NUMBER: HC430D010-HM43040840-41NDC

Luminous Intensity Polar Plot

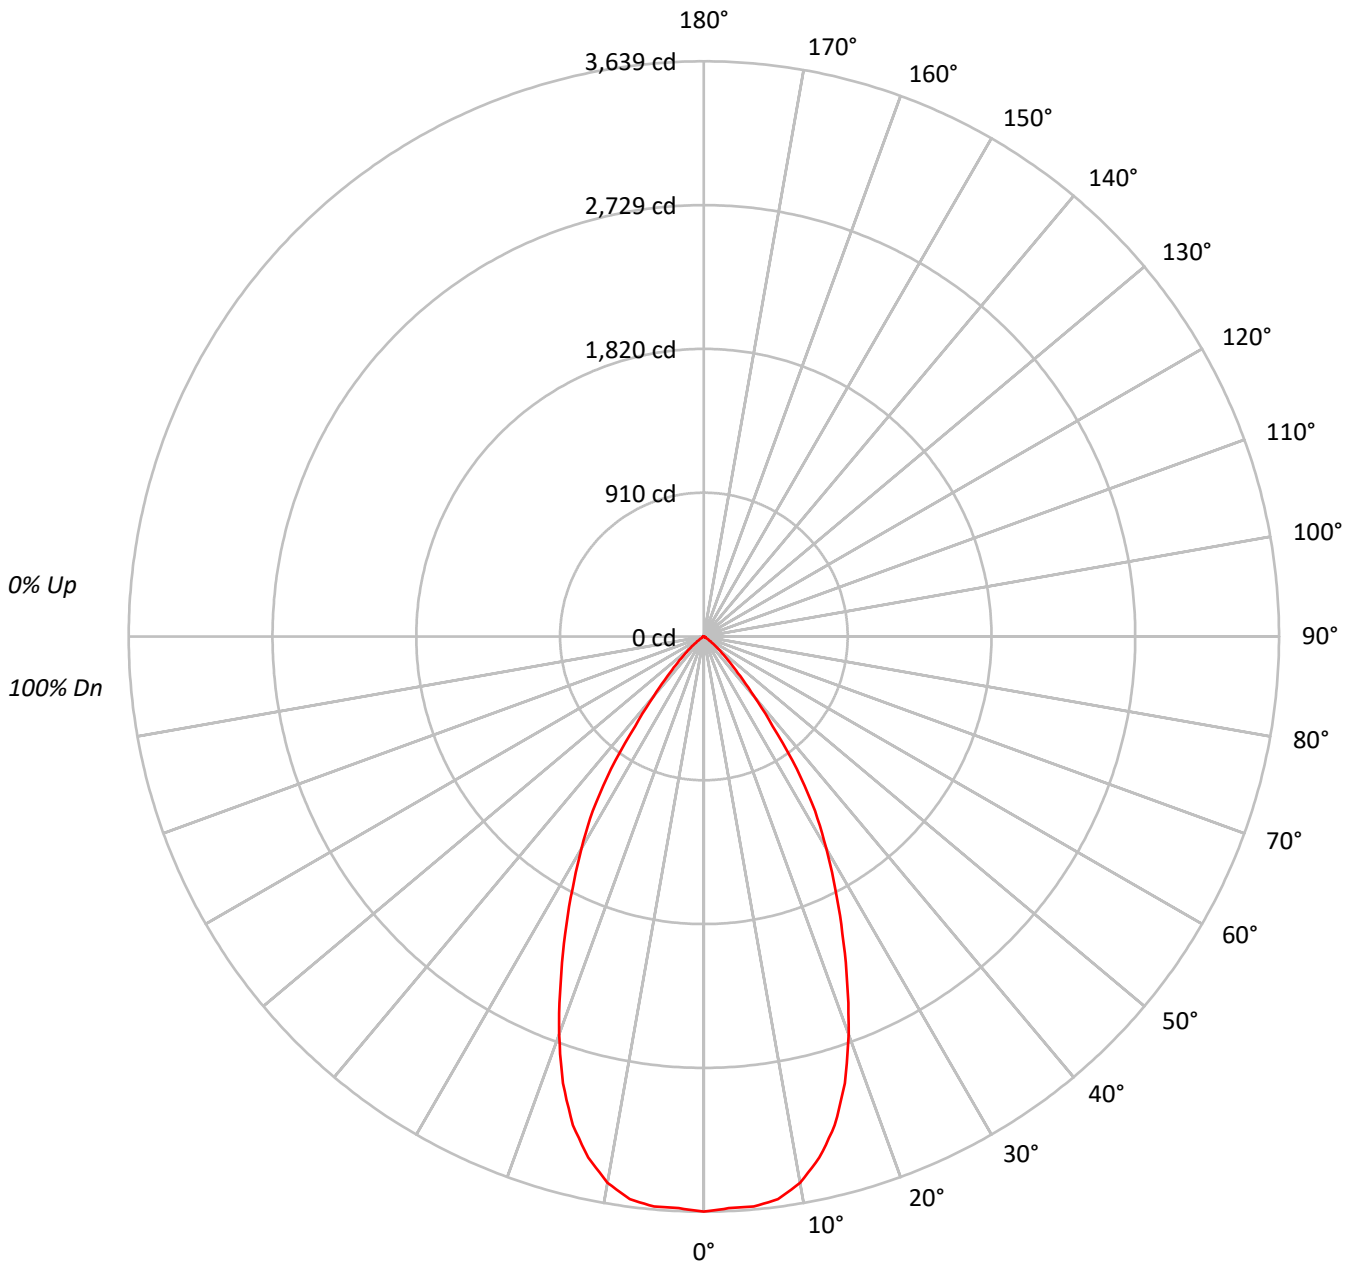



TEST NUMBER: P580316

CATALOG NUMBER: HC430D010-HM43040840-41NDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94			94
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	93	91	89	87			87
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			81
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76			76
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71			71
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66			66
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62			62
8	80	70	64	60	78	70	64	60	69	64	60	68	63	60	67	62	59	58			58
9	76	66	61	57	75	66	60	57	65	60	56	64	59	56	63	59	56	55			55
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	52			52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	448805
5°	448229
10°	439484
15°	408655
20°	351440
25°	282333
30°	220420
35°	154327
40°	79188
45°	40208
50°	20129
55°	7527
60°	3034
65°	2393
70°	1479
75°	953
80°	1421
85°	0



TEST NUMBER: P580316

CATALOG NUMBER: HC430D010-HM43040840-41NDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	342.3	11.2
10°-20°	883.4	29.0
20°-30°	951.6	31.2
30°-40°	625.2	20.5
40°-50°	194.4	6.4
50°-60°	38.2	1.3
60°-70°	8.1	0.3
70°-80°	2.9	0.1
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2177.3	71.5
0°-40°	2802.5	92.0
0°-60°	3035.1	99.6
0°-90°	3047.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3047.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3639	
5°	3620	342
15°	3200	883
25°	2074	952
35°	1025	625
45°	230	194
55°	35	38
65°	8	8
75°	2	3
85°	0	1
90°	0	



TEST NUMBER: P580316

CATALOG NUMBER: HC430D010-HM43040840-41NDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	3638.6
2.5°	3620.1
5°	3620.1
7.5°	3591.2
10°	3508.9
12.5°	3377.2
15°	3200.2
17.5°	2963.5
20°	2677.4
22.5°	2368.8
25°	2074.5
27.5°	1800.7
30°	1547.6
32.5°	1308.9
35°	1024.9
37.5°	714.1
40°	491.8
42.5°	339.5
45°	230.5
47.5°	156.5
50°	104.9
52.5°	65.9
55°	35.0
57.5°	14.4
60°	12.3
62.5°	10.3
65°	8.2
67.5°	6.2
70°	4.1
72.5°	4.1
75°	2.0
77.5°	2.0
80°	2.0
82.5°	2.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)