

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580367

Luminaire Tested: **HC430D010-HM43040935-41WDH**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580367
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-8)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC430D010-HM43040935-41WDH
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2801.7 lumens
Efficiency: N/A
Efficacy: 100.1 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.1
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580367

CATALOG NUMBER: HC430D010-HM43040935-41WDH

Luminous Intensity Polar Plot

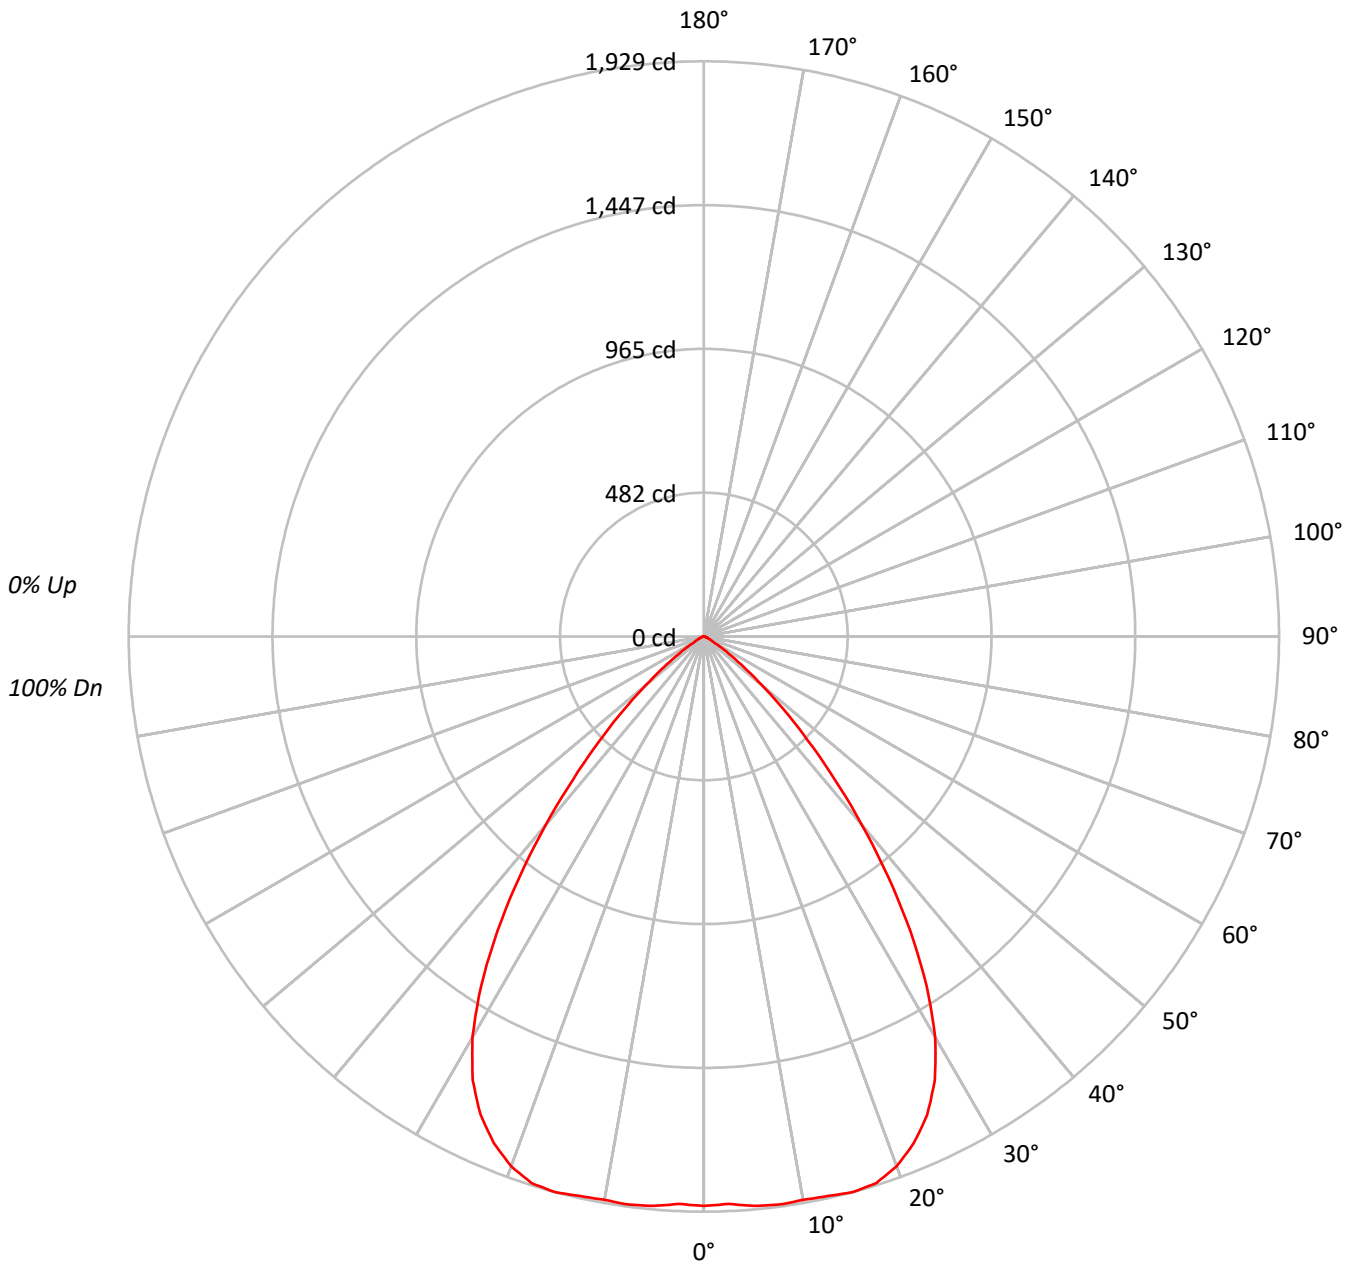



TEST NUMBER: P580367

CATALOG NUMBER: HC430D010-HM43040935-41WDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	108	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	86	84	84	84	84
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	81	78	76	76	76	76
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69	69	69	69
5	88	79	72	67	86	78	72	67	76	70	66	74	69	66	72	68	65	63	63	63	63
6	83	73	66	61	81	72	66	61	70	65	61	69	64	60	68	63	60	58	58	58	58
7	78	68	61	56	77	67	60	56	65	60	55	64	59	55	63	58	55	53	53	53	53
8	74	63	56	51	72	62	56	51	61	55	51	60	55	51	59	54	51	49	49	49	49
9	69	59	52	47	68	58	52	47	57	51	47	56	51	47	55	50	47	45	45	45	45
10	66	55	48	44	65	54	48	44	53	48	44	53	47	44	52	47	43	42	42	42	42

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	235565
5°	237332
10°	240289
15°	246340
20°	248137
25°	241041
30°	221004
35°	181837
40°	132549
45°	86050
50°	48510
55°	23010
60°	9103
65°	5633
70°	3787
75°	2526
80°	1279
85°	2547



TEST NUMBER: P580367

CATALOG NUMBER: HC430D010-HM43040935-41WDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	183.0	6.5
10°-20°	543.8	19.4
20°-30°	806.6	28.8
30°-40°	745.0	26.6
40°-50°	389.0	13.9
50°-60°	106.6	3.8
60°-70°	20.5	0.7
70°-80°	5.8	0.2
80°-90°	1.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1533.5	54.7
0°-40°	2278.5	81.3
0°-60°	2774.2	99.0
0°-90°	2801.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2801.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1910	
5°	1917	183
15°	1929	544
25°	1771	807
35°	1208	745
45°	493	389
55°	107	107
65°	19	21
75°	5	6
85°	2	1
90°	0	



TEST NUMBER: P580367

CATALOG NUMBER: HC430D010-HM43040935-41WDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1909.8
2.5°	1904.5
5°	1916.8
7.5°	1922.0
10°	1918.5
12.5°	1922.0
15°	1929.1
17.5°	1922.0
20°	1890.4
22.5°	1839.5
25°	1771.1
27.5°	1678.0
30°	1551.7
32.5°	1392.0
35°	1207.6
37.5°	1014.5
40°	823.2
42.5°	647.7
45°	493.3
47.5°	361.6
50°	252.8
52.5°	168.5
55°	107.0
57.5°	63.2
60°	36.9
62.5°	26.3
65°	19.3
67.5°	14.0
70°	10.5
72.5°	7.0
75°	5.3
77.5°	3.5
80°	1.8
82.5°	1.8
85°	1.8
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)