

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P592747

Luminaire Tested: **HC430D010-HM43040950-41WDWB**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P592747
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-10)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC430D010-HM43040950-41WDWB
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, WHITE BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2829.6 lumens
Efficiency: N/A
Efficacy: 101.1 lumens/watt
Spacing Criteria (0/90/45): 1.14 / 1.14 / 1.07
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P592747

CATALOG NUMBER: HC430D010-HM43040950-41WDWB

Luminous Intensity Polar Plot

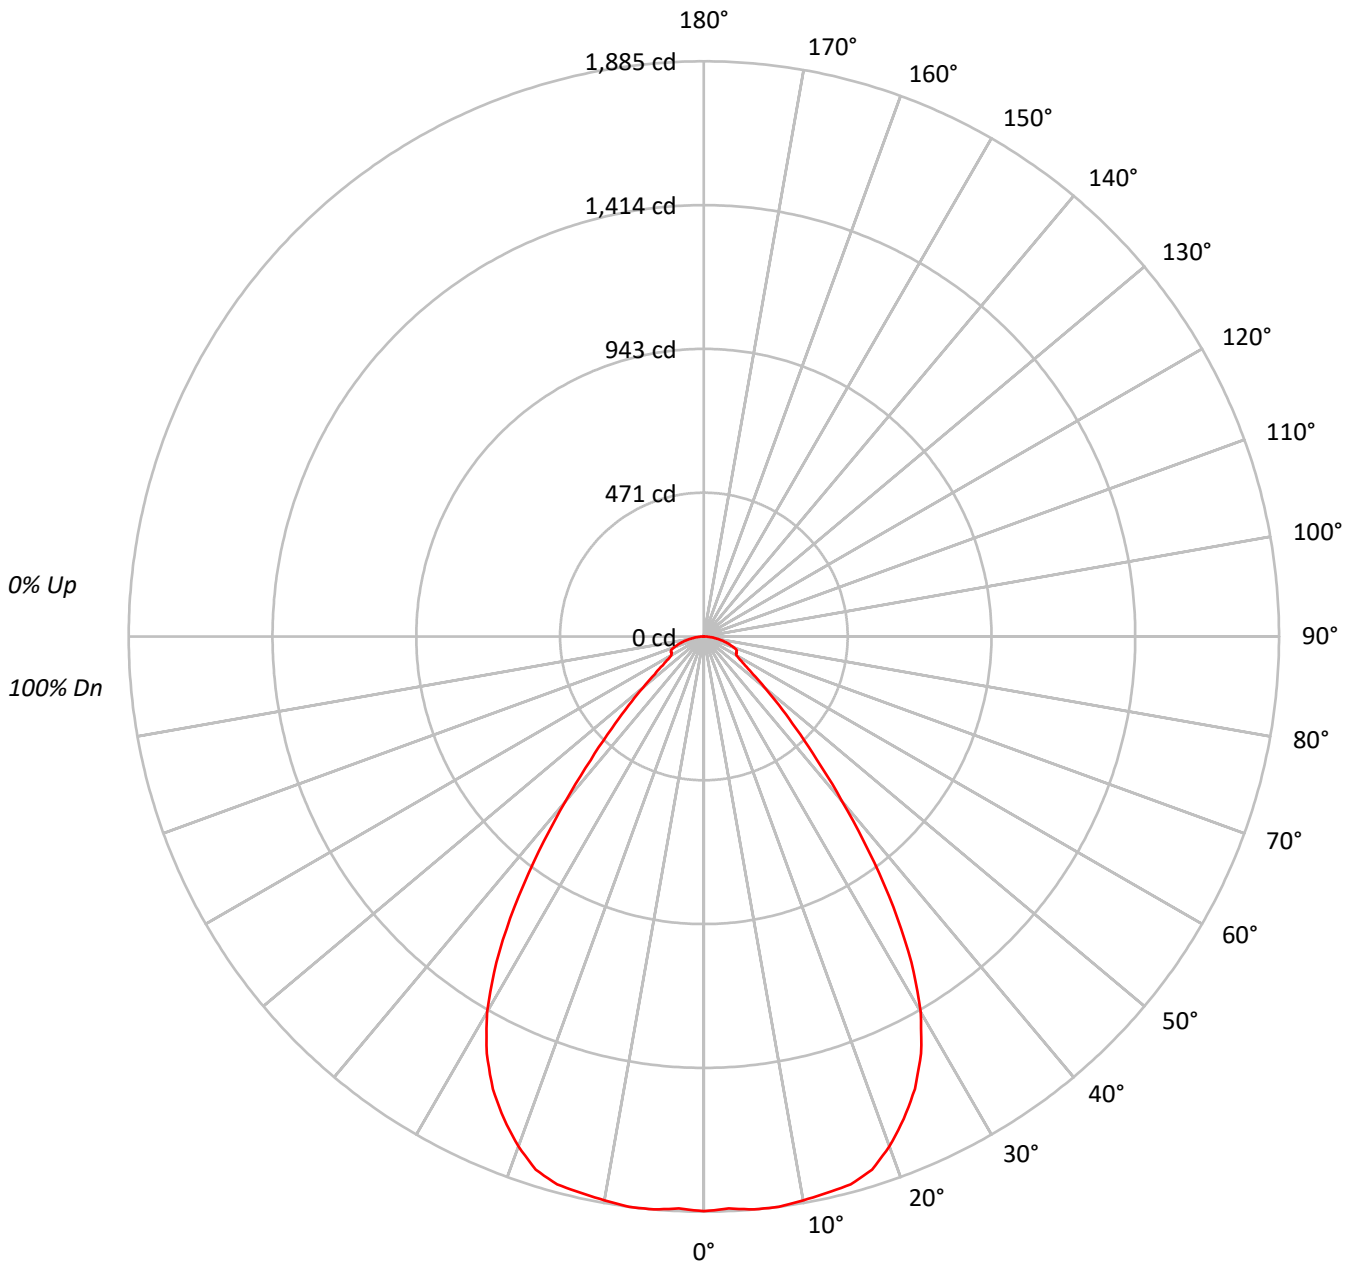



TEST NUMBER: P592747

CATALOG NUMBER: HC430D010-HM43040950-41WDWB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	92	90	90	90	90
2	104	98	93	89	102	96	92	88	93	89	86	90	87	84	87	84	82	80	80	80	80
3	98	89	83	78	95	88	82	78	85	80	76	83	78	75	80	77	74	72	72	72	72
4	91	82	75	70	89	81	74	69	78	73	69	76	72	68	74	70	67	65	65	65	65
5	86	75	68	63	84	74	68	63	72	67	62	71	65	61	69	64	61	59	59	59	59
6	80	70	62	57	79	69	62	57	67	61	57	66	60	56	64	59	56	54	54	54	54
7	76	64	57	52	74	64	57	52	62	56	52	61	56	51	60	55	51	49	49	49	49
8	71	60	53	48	70	59	53	48	58	52	48	57	51	47	56	51	47	46	46	46	46
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	44	42	42	42	42
10	64	52	46	41	62	52	45	41	51	45	41	50	45	41	49	44	41	39	39	39	39

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	232297
5°	233395
10°	234991
15°	237350
20°	233396
25°	222668
30°	202304
35°	163181
40°	113227
45°	74310
50°	49815
55°	35440
60°	30269
65°	34790
70°	37290
75°	35933
80°	32391
85°	29861



TEST NUMBER: P592747

CATALOG NUMBER: HC430D010-HM43040950-41WDWB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	179.6	6.3
10°-20°	522.2	18.5
20°-30°	746.0	26.4
30°-40°	666.5	23.6
40°-50°	341.8	12.1
50°-60°	155.4	5.5
60°-70°	115.8	4.1
70°-80°	78.9	2.8
80°-90°	23.4	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1447.8	51.2
0°-40°	2114.3	74.7
0°-60°	2611.5	92.3
0°-90°	2829.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2829.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1883	
5°	1885	180
15°	1859	522
25°	1636	746
35°	1084	666
45°	426	342
55°	165	155
65°	119	116
75°	75	79
85°	21	23
90°	0	



TEST NUMBER: P592747

CATALOG NUMBER: HC430D010-HM43040950-41WDWB

CANDELA DISTRIBUTION (FULL):

	0°
0°	1883.3
2.5°	1876.2
5°	1885.0
7.5°	1885.0
10°	1876.2
12.5°	1867.5
15°	1858.7
17.5°	1832.4
20°	1778.1
22.5°	1711.4
25°	1636.1
27.5°	1541.3
30°	1420.4
32.5°	1266.1
35°	1083.7
37.5°	889.0
40°	703.2
42.5°	548.9
45°	426.0
47.5°	333.2
50°	259.6
52.5°	203.4
55°	164.8
57.5°	138.5
60°	122.7
62.5°	119.2
65°	119.2
67.5°	115.7
70°	103.4
72.5°	89.5
75°	75.4
77.5°	59.7
80°	45.6
82.5°	33.3
85°	21.1
87.5°	8.8
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)