

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580407

Luminaire Tested: **HC435D010-HM43040827-41WDC**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580407
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-7)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC435D010-HM43040827-41WDC
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3686.3 lumens
Efficiency: N/A
Efficacy: 109.4 lumens/watt
Spacing Criteria (0/90/45): 1.25 / 1.25 / 1.11
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 33.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580407
CATALOG NUMBER: HC435D010-HM43040827-41WDC

Luminous Intensity Polar Plot

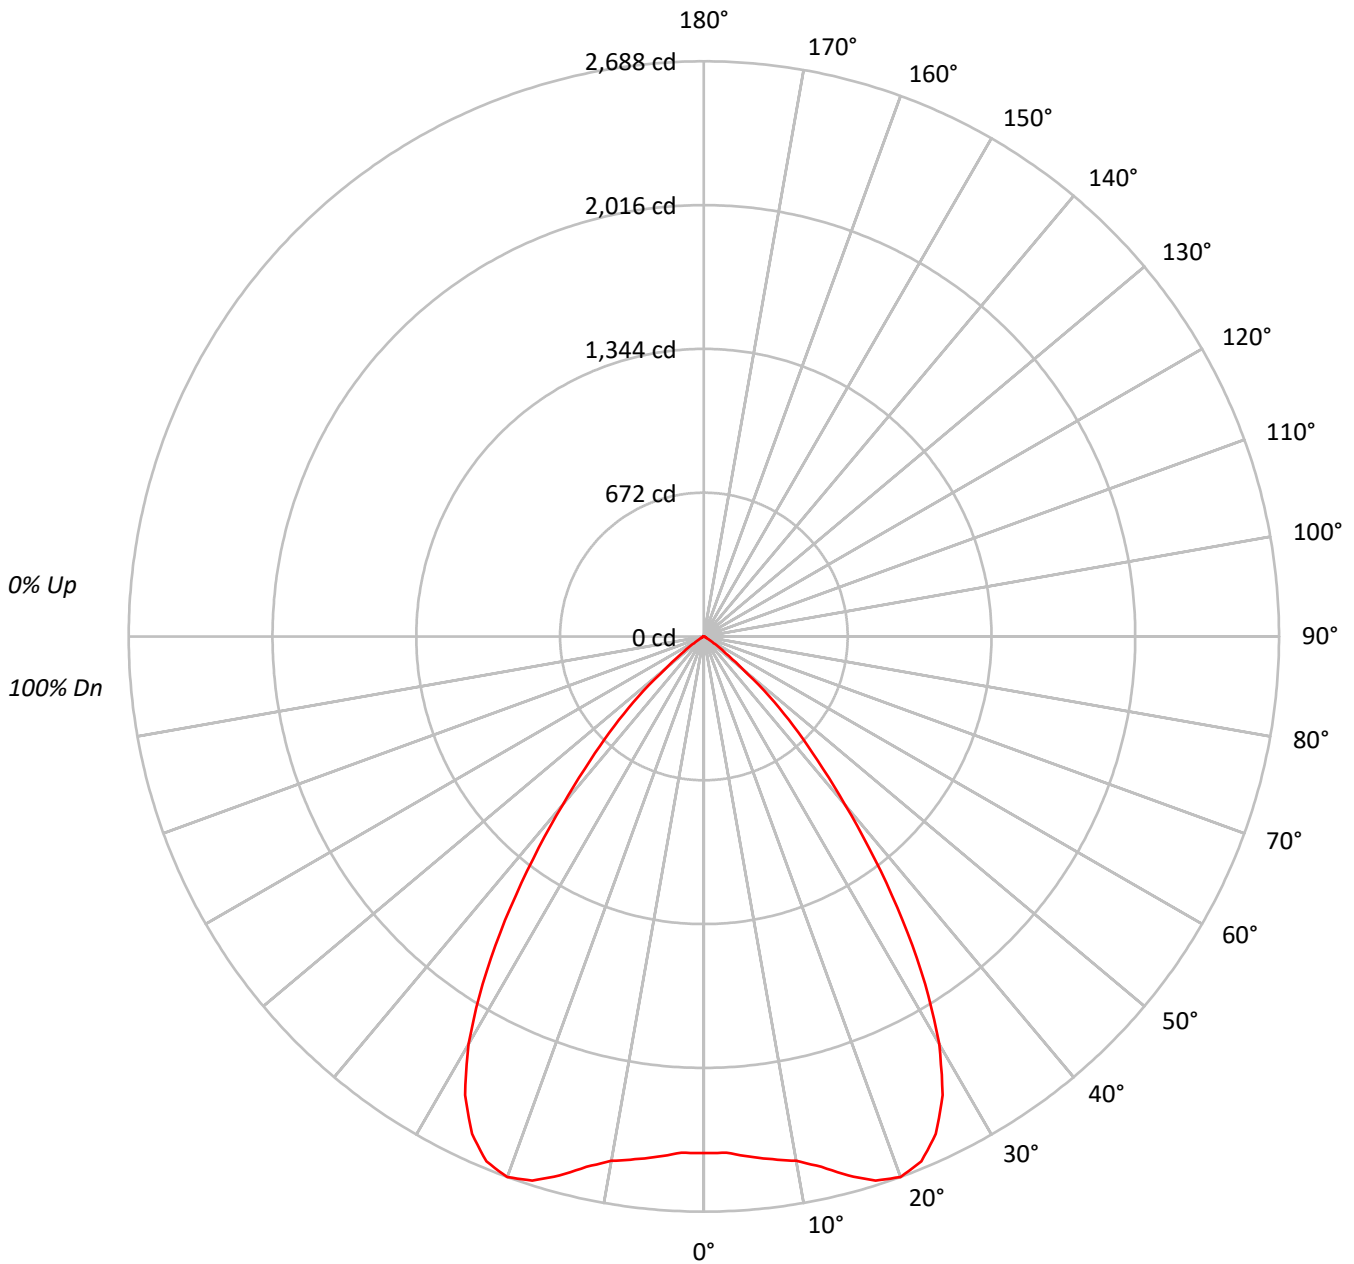



TEST NUMBER: P580407

CATALOG NUMBER: HC435D010-HM43040827-41WDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92	92	92	92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85	85	85	85
3	101	93	88	84	98	92	87	83	89	85	82	87	83	80	85	82	79	77	77	77	77
4	95	86	80	76	93	85	79	75	83	78	74	81	77	73	79	75	72	71	71	71	71
5	89	80	73	69	87	79	73	68	77	72	68	75	71	67	74	70	66	65	65	65	65
6	84	74	67	63	82	73	67	62	72	66	62	70	65	62	69	65	61	60	60	60	60
7	79	69	62	57	78	68	62	57	67	61	57	66	60	57	64	60	56	55	55	55	55
8	75	64	57	53	73	63	57	53	62	57	53	61	56	52	60	56	52	51	51	51	51
9	70	60	53	49	69	59	53	49	58	53	49	57	52	48	56	52	48	47	47	47	47
10	67	56	50	45	66	55	49	45	55	49	45	54	49	45	53	48	45	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	297806
5°	302162
10°	311643
15°	332995
20°	352858
25°	348993
30°	313226
35°	243769
40°	165138
45°	103110
50°	44634
55°	14967
60°	3750
65°	2539
70°	1587
75°	1001
80°	1492
85°	0



TEST NUMBER: P580407

CATALOG NUMBER: HC435D010-HM43040827-41WDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	234.4	6.4
10°-20°	740.3	20.1
20°-30°	1159.9	31.5
30°-40°	1001.0	27.2
40°-50°	460.3	12.5
50°-60°	78.2	2.1
60°-70°	8.8	0.2
70°-80°	3.1	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2134.6	57.9
0°-40°	3135.6	85.1
0°-60°	3674.1	99.7
0°-90°	3686.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3686.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2414	
5°	2440	234
15°	2608	740
25°	2564	1160
35°	1619	1001
45°	591	460
55°	70	78
65°	9	9
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P580407

CATALOG NUMBER: HC435D010-HM43040827-41WDC

CANDELA DISTRIBUTION (FULL):

0°	
0°	2414.4
2.5°	2414.4
5°	2440.4
7.5°	2464.3
10°	2488.2
12.5°	2538.2
15°	2607.7
17.5°	2666.4
20°	2688.2
22.5°	2655.6
25°	2564.3
27.5°	2416.5
30°	2199.2
32.5°	1925.4
35°	1618.9
37.5°	1310.4
40°	1025.6
42.5°	784.4
45°	591.1
47.5°	415.1
50°	232.6
52.5°	128.2
55°	69.6
57.5°	34.7
60°	15.2
62.5°	10.9
65°	8.7
67.5°	6.5
70°	4.4
72.5°	4.4
75°	2.1
77.5°	2.1
80°	2.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)