

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580420

Luminaire Tested: **HC435D010-HM43040830-41NDH**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580420
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-2)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC435D010-HM43040830-41NDH
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" NARROW DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3262.0 lumens
Efficiency: N/A
Efficacy: 96.8 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.91
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 33.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580420

CATALOG NUMBER: HC435D010-HM43040830-41NDH

Luminous Intensity Polar Plot

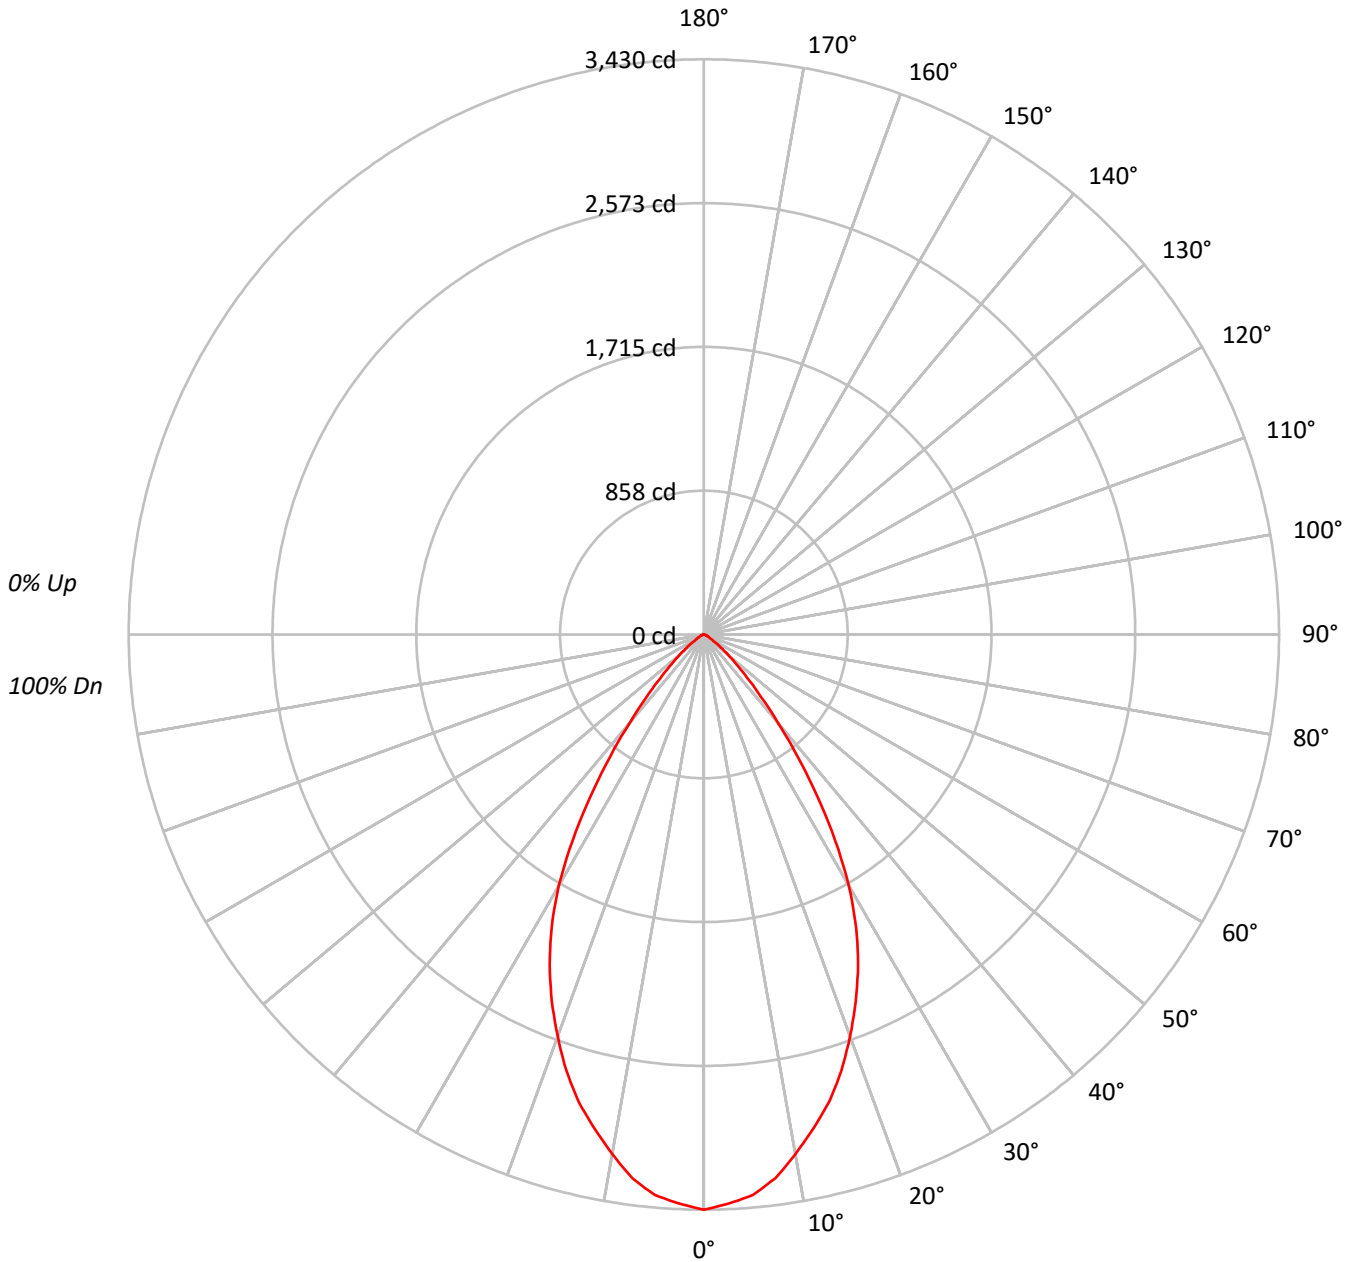



TEST NUMBER: P580420

CATALOG NUMBER: HC435D010-HM43040830-41NDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86	86	86	86
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	81	79	79	79	79
4	96	88	82	78	94	87	81	77	85	80	76	82	79	75	81	77	74	73	73	73	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67	67	67	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	63	63	63	63
7	81	72	65	61	80	71	65	61	70	64	60	68	64	60	67	63	60	58	58	58	58
8	77	67	61	57	76	67	61	56	65	60	56	64	59	56	63	59	56	54	54	54	54
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	60	55	52	51	51	51	51
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48	48	48	48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	423076
5°	415393
10°	393994
15°	368405
20°	334586
25°	296079
30°	246285
35°	177591
40°	110828
45°	63931
50°	36056
55°	17182
60°	9843
65°	7559
70°	5049
75°	3384
80°	3339
85°	3397



TEST NUMBER: P580420

CATALOG NUMBER: HC435D010-HM43040830-41NDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	313.6	9.6
10°-20°	804.8	24.7
20°-30°	989.8	30.3
30°-40°	735.1	22.5
40°-50°	298.9	9.2
50°-60°	82.8	2.5
60°-70°	25.8	0.8
70°-80°	8.7	0.3
80°-90°	2.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2108.2	64.6
0°-40°	2843.4	87.2
0°-60°	3225.0	98.9
0°-90°	3262.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3262.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3430	
5°	3355	314
15°	2885	805
25°	2176	990
35°	1179	735
45°	366	299
55°	80	83
65°	26	26
75°	7	9
85°	2	3
90°	0	



TEST NUMBER: P580420

CATALOG NUMBER: HC435D010-HM43040830-41NDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	3430.0
2.5°	3397.2
5°	3354.9
7.5°	3270.3
10°	3145.7
12.5°	3016.6
15°	2885.0
17.5°	2727.6
20°	2549.0
22.5°	2368.2
25°	2175.5
27.5°	1966.4
30°	1729.2
32.5°	1459.0
35°	1179.4
37.5°	916.3
40°	688.3
42.5°	502.8
45°	366.5
47.5°	263.1
50°	187.9
52.5°	129.3
55°	79.9
57.5°	51.7
60°	39.9
62.5°	32.9
65°	25.9
67.5°	18.8
70°	14.0
72.5°	11.8
75°	7.1
77.5°	4.7
80°	4.7
82.5°	2.4
85°	2.4
87.5°	2.4
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)