

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580423

Luminaire Tested: **HC435D010-HM43040830-41MDC**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580423
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC435D010-HM43040830-41MDC
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3628.6 lumens
Efficiency: N/A
Efficacy: 107.7 lumens/watt
Spacing Criteria (0/90/45): 1 / 1 / 0.96
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 33.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580423

CATALOG NUMBER: HC435D010-HM43040830-41MDC

Luminous Intensity Polar Plot

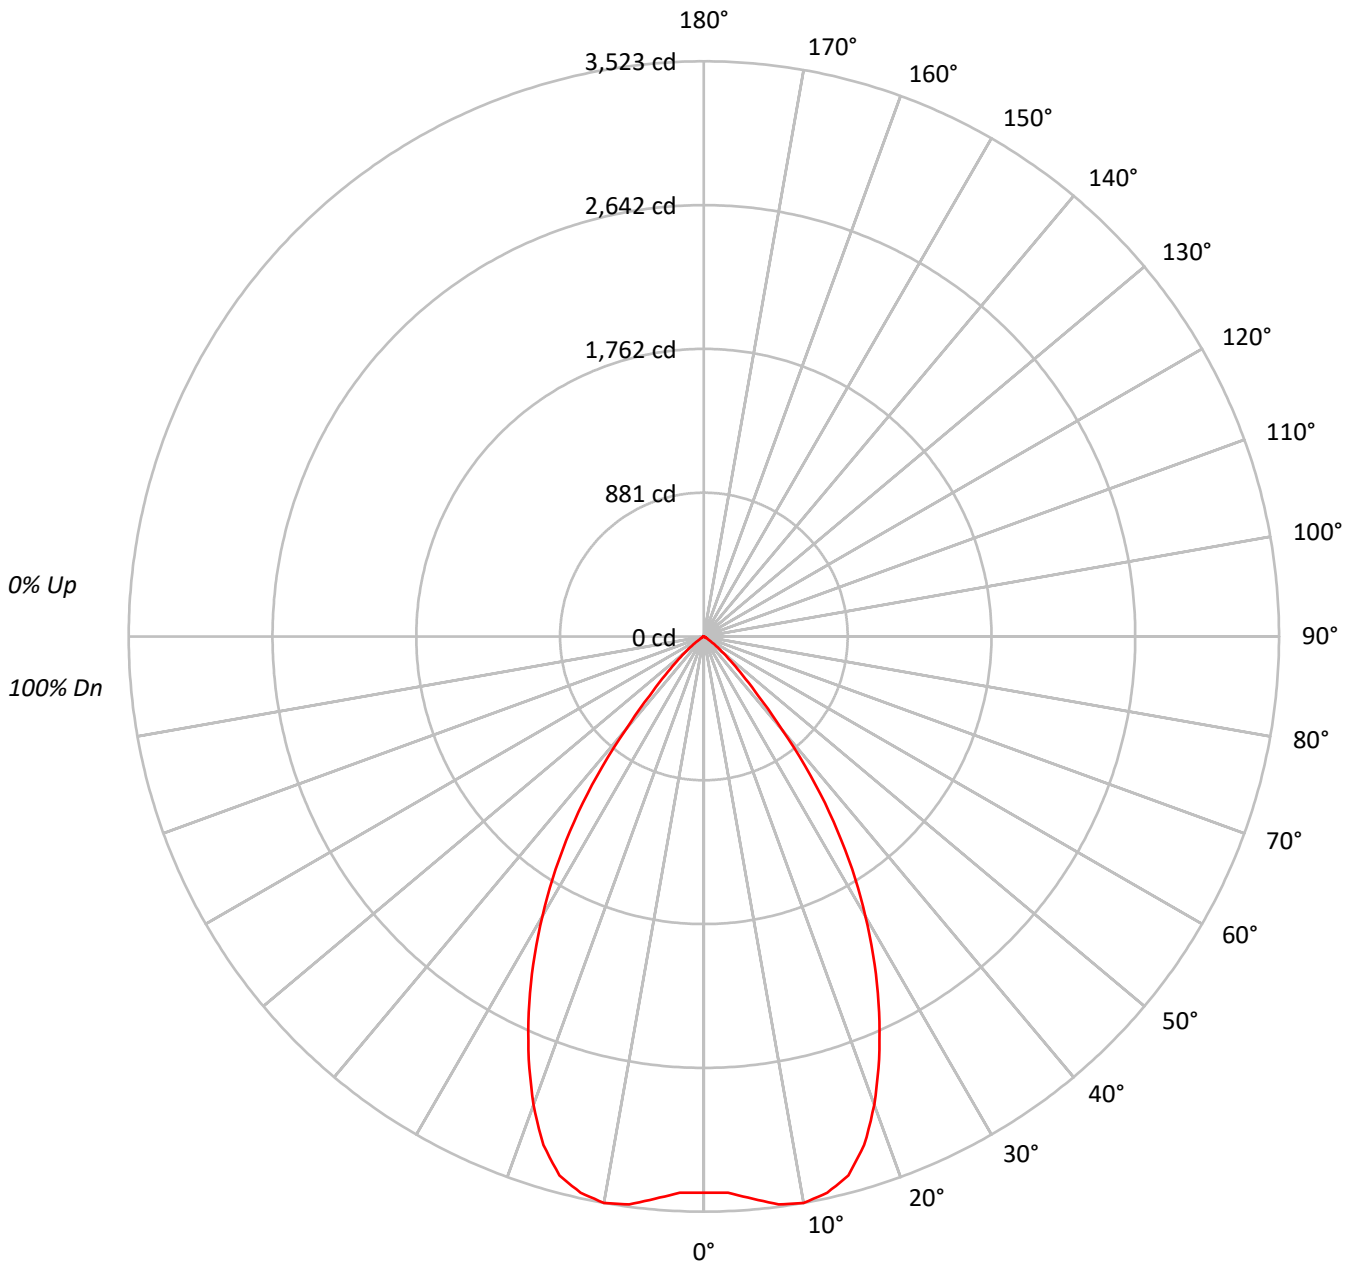



TEST NUMBER: P580423

CATALOG NUMBER: HC435D010-HM43040830-41MDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	98	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	74			
5	91	83	77	72	90	82	76	72	80	75	72	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64			
7	82	73	66	62	81	72	66	62	71	65	62	69	65	61	68	64	61	60			
8	78	68	62	58	77	68	62	58	67	61	57	65	61	57	64	60	57	56			
9	74	64	58	54	73	64	58	54	63	57	54	62	57	54	61	57	53	52			
10	70	61	55	51	69	60	54	51	59	54	50	58	54	50	58	53	50	49			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	420288
5°	428022
10°	441213
15°	436314
20°	400650
25°	345645
30°	281678
35°	208564
40°	119651
45°	57843
50°	27517
55°	9613
60°	3503
65°	2072
70°	1695
75°	1144
80°	0
85°	0



TEST NUMBER: P580423

CATALOG NUMBER: HC435D010-HM43040830-41MDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	332.5	9.2
10°-20°	947.2	26.1
20°-30°	1156.8	31.9
30°-40°	850.4	23.4
40°-50°	281.9	7.8
50°-60°	49.8	1.4
60°-70°	7.5	0.2
70°-80°	2.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2436.5	67.1
0°-40°	3286.9	90.6
0°-60°	3618.6	99.7
0°-90°	3628.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3628.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3407	
5°	3457	332
15°	3417	947
25°	2540	1157
35°	1385	850
45°	332	282
55°	45	50
65°	7	8
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P580423

CATALOG NUMBER: HC435D010-HM43040830-41MDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	3407.4
2.5°	3409.8
5°	3456.9
7.5°	3508.6
10°	3522.7
12.5°	3489.8
15°	3416.8
17.5°	3266.3
20°	3052.3
22.5°	2803.1
25°	2539.7
27.5°	2264.6
30°	1977.7
32.5°	1690.8
35°	1385.1
37.5°	1074.7
40°	743.1
42.5°	491.5
45°	331.6
47.5°	221.1
50°	143.4
52.5°	84.6
55°	44.7
57.5°	18.8
60°	14.2
62.5°	9.4
65°	7.1
67.5°	4.7
70°	4.7
72.5°	2.4
75°	2.4
77.5°	2.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)