

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580425

Luminaire Tested: **HC435D010-HM43040830-41WDC**

Issue Date: 9/9/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P580425  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-7)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC435D010-HM43040830-41WDC  
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT  
Ballast/Driver: ELECTRONIC DRIVER


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3988.1 lumens  
Efficiency: N/A  
Efficacy: 118.3 lumens/watt  
Spacing Criteria (0/90/45): 1.25 / 1.25 / 1.11  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 33.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P580425  
CATALOG NUMBER: HC435D010-HM43040830-41WDC

### Luminous Intensity Polar Plot

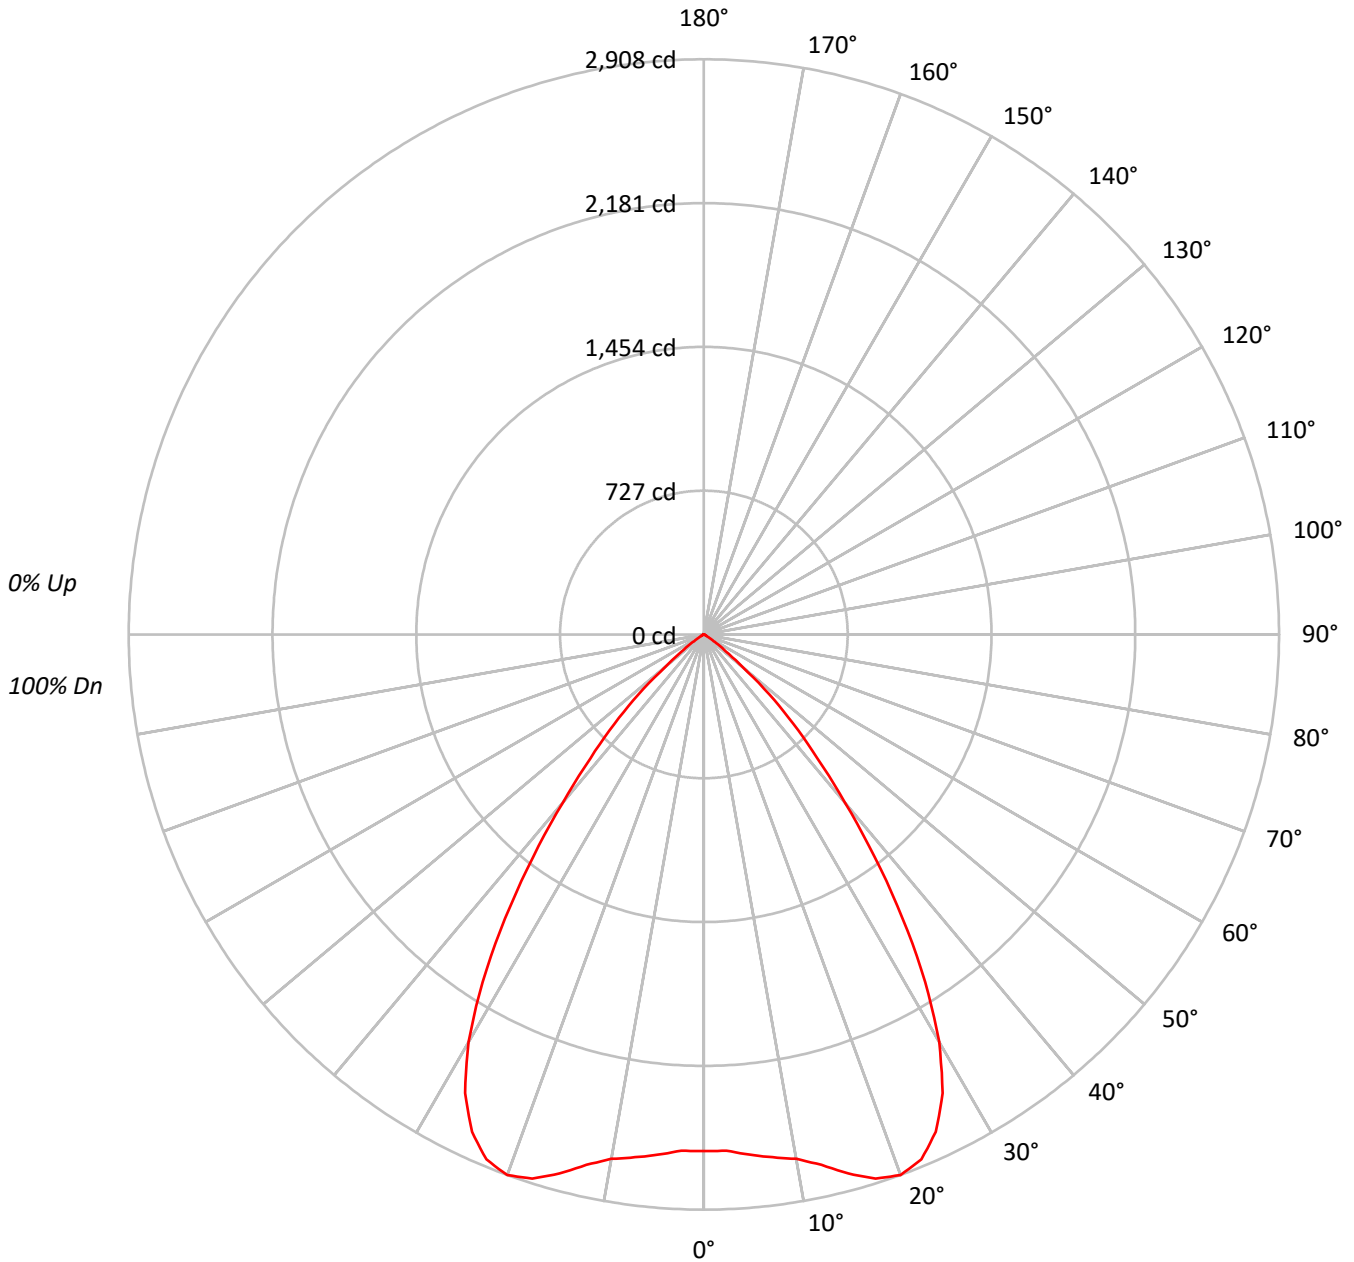



TEST NUMBER: P580425

CATALOG NUMBER: HC435D010-HM43040830-41WDC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92	92	92	92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85	85	85	85
3	101	93	88	84	98	92	87	83	89	85	82	87	83	80	85	82	79	77	77	77	77
4	95	86	80	76	93	85	79	75	83	78	74	81	77	73	79	75	72	71	71	71	71
5	89	80	73	69	87	79	73	68	77	72	68	75	71	67	74	70	66	65	65	65	65
6	84	74	67	63	82	73	67	62	72	66	62	70	65	62	69	65	61	60	60	60	60
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55	55	55	55
8	75	64	57	53	73	63	57	53	62	57	53	61	56	52	60	56	52	51	51	51	51
9	70	60	53	49	69	59	53	49	58	53	49	57	52	48	56	52	48	47	47	47	47
10	67	56	50	45	66	55	49	45	55	49	45	54	49	45	53	48	45	43	43	43	43

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	322179
5°	326901
10°	337156
15°	360258
20°	381735
25°	377546
30°	338863
35°	263736
40°	178680
45°	111535
50°	48280
55°	16171
60°	4046
65°	2743
70°	1695
75°	1144
80°	1705
85°	0



TEST NUMBER: P580425

CATALOG NUMBER: HC435D010-HM43040830-41WDC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	253.6	6.4
10°-20°	800.9	20.1
20°-30°	1254.8	31.5
30°-40°	1083.0	27.2
40°-50°	498.0	12.5
50°-60°	84.6	2.1
60°-70°	9.6	0.2
70°-80°	3.4	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2309.3	57.9
0°-40°	3392.2	85.1
0°-60°	3974.8	99.7
0°-90°	3988.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3988.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2612	
5°	2640	254
15°	2821	801
25°	2774	1255
35°	1752	1083
45°	639	498
55°	75	85
65°	9	10
75°	2	3
85°	0	0
90°	0	



TEST NUMBER: P580425

CATALOG NUMBER: HC435D010-HM43040830-41WDC

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2612.0
2.5°	2612.0
5°	2640.2
7.5°	2666.0
10°	2691.9
12.5°	2745.9
15°	2821.2
17.5°	2884.6
20°	2908.2
22.5°	2872.9
25°	2774.1
27.5°	2614.3
30°	2379.2
32.5°	2083.0
35°	1751.5
37.5°	1417.7
40°	1109.7
42.5°	848.7
45°	639.4
47.5°	449.0
50°	251.6
52.5°	138.7
55°	75.2
57.5°	37.7
60°	16.4
62.5°	11.8
65°	9.4
67.5°	7.1
70°	4.7
72.5°	4.7
75°	2.4
77.5°	2.4
80°	2.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)