

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580435

Luminaire Tested: **HC435D010-HM43040835-41WDBB**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580435
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-11)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC435D010-HM43040835-41WDBB
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, BLACK BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3056.9 lumens
Efficiency: N/A
Efficacy: 90.7 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.03
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 33.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580435

CATALOG NUMBER: HC435D010-HM43040835-41WDBB

Luminous Intensity Polar Plot

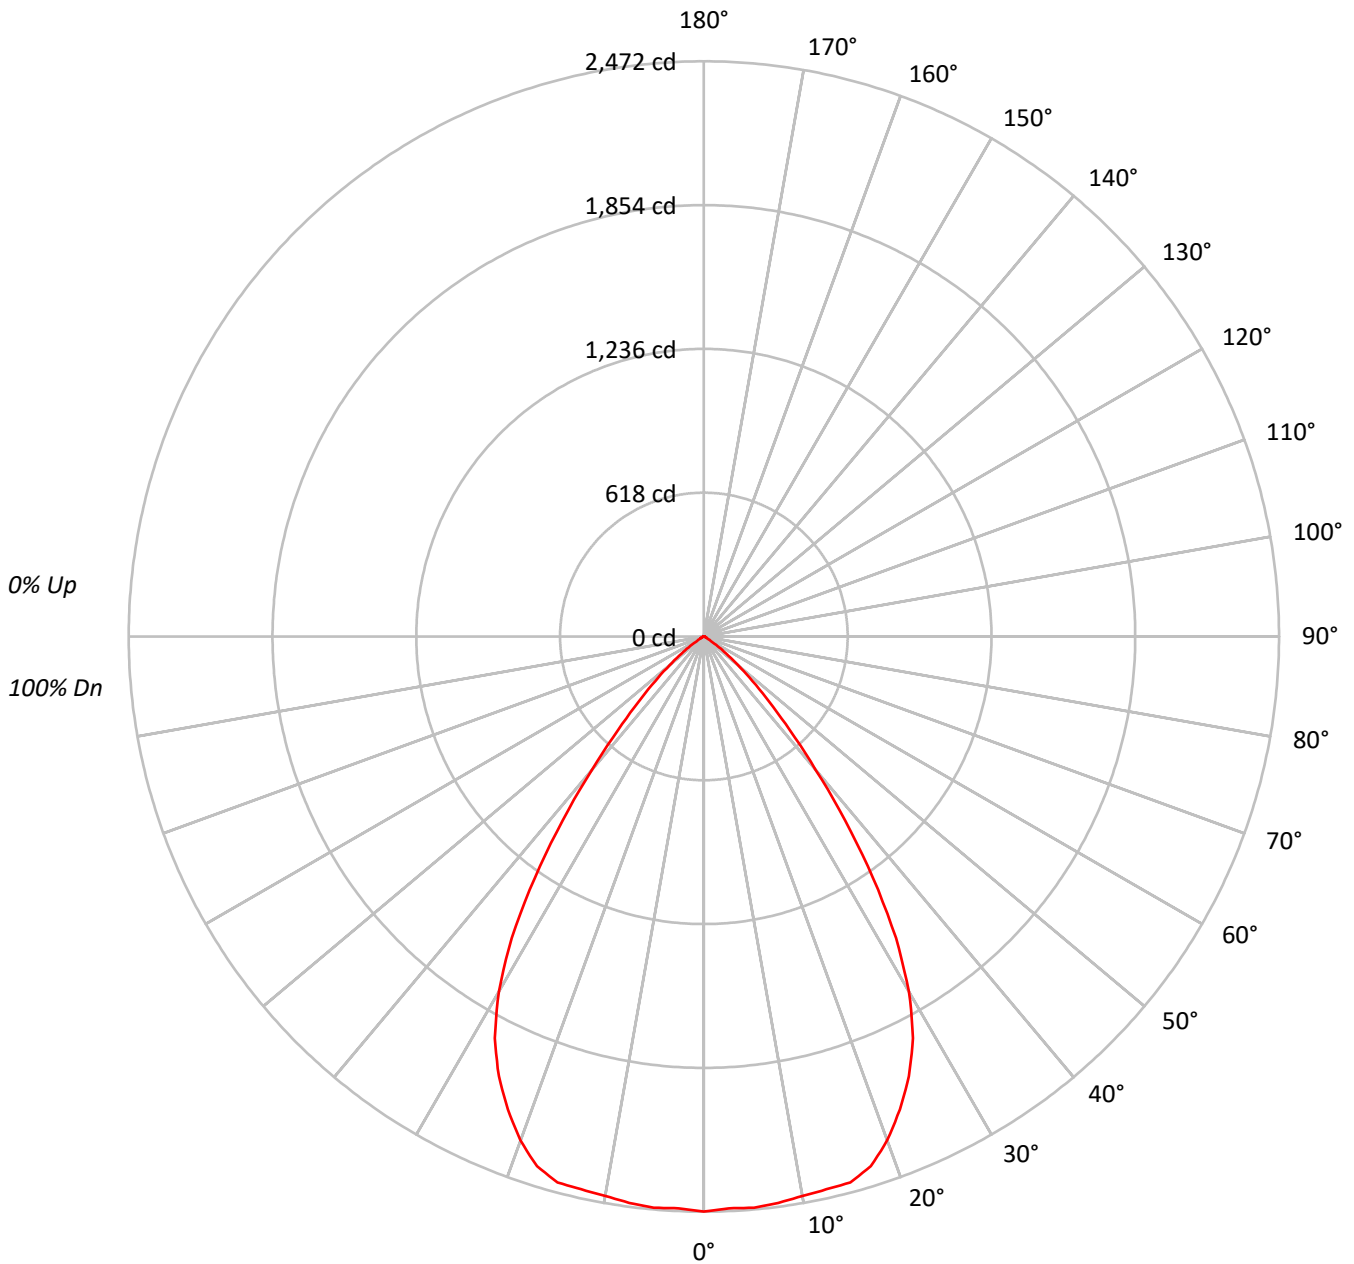



TEST NUMBER: P580435

CATALOG NUMBER: HC435D010-HM43040835-41WDBB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93			93
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85			85
3	101	94	89	84	99	93	88	84	90	86	82	87	84	81	85	82	80	78			78
4	95	87	81	77	93	86	80	76	84	79	75	82	78	74	80	76	73	72			72
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66			66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56
8	76	65	59	55	74	65	59	54	64	58	54	63	58	54	62	57	54	52			52
9	72	61	55	51	71	61	55	51	60	54	50	59	54	50	58	53	50	49			49
10	68	58	51	47	67	57	51	47	56	51	47	55	50	47	55	50	47	45			45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	304861
5°	305146
10°	305719
15°	310188
20°	302453
25°	283776
30°	251000
35°	190857
40°	120263
45°	69060
50°	36632
55°	15204
60°	4070
65°	3444
70°	2561
75°	2240
80°	1705
85°	3397



TEST NUMBER: P580435

CATALOG NUMBER: HC435D010-HM43040835-41WDBB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	234.4	7.7
10°-20°	680.2	22.3
20°-30°	949.2	31.1
30°-40°	781.1	25.6
40°-50°	321.8	10.5
50°-60°	72.5	2.4
60°-70°	11.7	0.4
70°-80°	4.4	0.1
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1863.8	61.0
0°-40°	2644.9	86.5
0°-60°	3039.2	99.4
0°-90°	3056.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3056.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2472	
5°	2464	234
15°	2429	680
25°	2085	949
35°	1268	781
45°	396	322
55°	71	73
65°	12	12
75°	5	4
85°	2	2
90°	0	



TEST NUMBER: P580435

CATALOG NUMBER: HC435D010-HM43040835-41WDBB

CANDELA DISTRIBUTION (FULL):

0°	
0°	2471.6
2.5°	2459.8
5°	2464.5
7.5°	2455.0
10°	2440.9
12.5°	2433.8
15°	2429.1
17.5°	2386.7
20°	2304.2
22.5°	2200.6
25°	2085.1
27.5°	1946.1
30°	1762.3
32.5°	1536.2
35°	1267.5
37.5°	996.7
40°	746.9
42.5°	544.2
45°	395.9
47.5°	282.7
50°	190.9
52.5°	120.2
55°	70.7
57.5°	35.3
60°	16.5
62.5°	14.2
65°	11.8
67.5°	9.4
70°	7.1
72.5°	4.7
75°	4.7
77.5°	2.4
80°	2.4
82.5°	2.4
85°	2.4
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)