

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580561

Luminaire Tested: **HC440D010-HM43040830-41WDBB**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580561
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-11)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC440D010-HM43040830-41WDBB
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, BLACK BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3525.6 lumens
Efficiency: N/A
Efficacy: 86.0 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.03
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 41
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580561

CATALOG NUMBER: HC440D010-HM43040830-41WDBB

Luminous Intensity Polar Plot

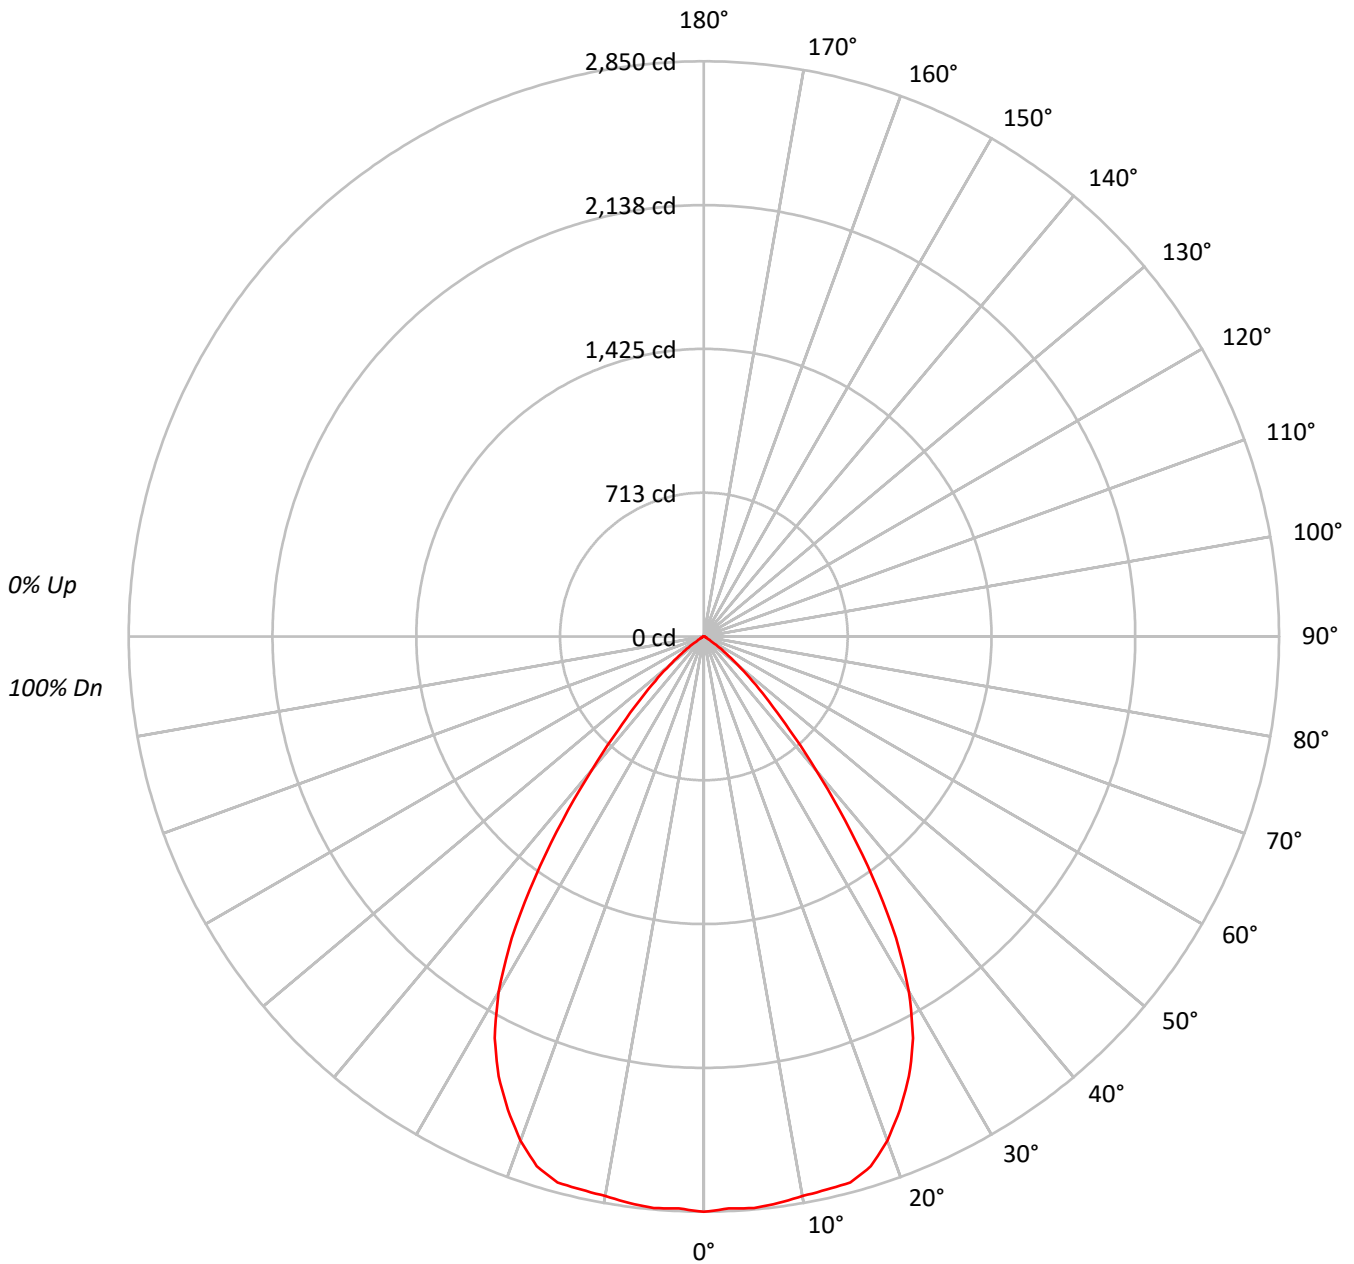



TEST NUMBER: P580561

CATALOG NUMBER: HC440D010-HM43040830-41WDBB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | 100 |
| 1 | 113 | 110 | 107 | 105 | 111 | 108 | 106 | 103 | 104 | 102 | 100 | 100 | 99 | 97 | 97 | 96 | 94 | 93 | | | 93 |
| 2 | 107 | 102 | 97 | 94 | 105 | 100 | 96 | 93 | 97 | 93 | 91 | 94 | 91 | 89 | 91 | 89 | 87 | 85 | | | 85 |
| 3 | 101 | 94 | 89 | 84 | 99 | 93 | 88 | 84 | 90 | 86 | 82 | 87 | 84 | 81 | 85 | 82 | 80 | 78 | | | 78 |
| 4 | 95 | 87 | 81 | 77 | 93 | 86 | 80 | 76 | 84 | 79 | 75 | 82 | 78 | 74 | 80 | 76 | 73 | 72 | | | 72 |
| 5 | 90 | 81 | 75 | 70 | 88 | 80 | 74 | 70 | 78 | 73 | 69 | 76 | 72 | 68 | 75 | 71 | 68 | 66 | | | 66 |
| 6 | 85 | 75 | 69 | 64 | 83 | 74 | 68 | 64 | 73 | 67 | 63 | 71 | 67 | 63 | 70 | 66 | 62 | 61 | | | 61 |
| 7 | 80 | 70 | 64 | 59 | 79 | 69 | 63 | 59 | 68 | 63 | 59 | 67 | 62 | 58 | 66 | 61 | 58 | 56 | | | 56 |
| 8 | 76 | 65 | 59 | 55 | 74 | 65 | 59 | 54 | 64 | 58 | 54 | 63 | 58 | 54 | 62 | 57 | 54 | 52 | | | 52 |
| 9 | 72 | 61 | 55 | 51 | 71 | 61 | 55 | 51 | 60 | 54 | 50 | 59 | 54 | 50 | 58 | 53 | 50 | 49 | | | 49 |
| 10 | 68 | 58 | 51 | 47 | 67 | 57 | 51 | 47 | 56 | 51 | 47 | 55 | 50 | 47 | 55 | 50 | 47 | 45 | | | 45 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 351597 |
| 5° | 351937 |
| 10° | 352599 |
| 15° | 357755 |
| 20° | 348841 |
| 25° | 327299 |
| 30° | 289498 |
| 35° | 220129 |
| 40° | 138699 |
| 45° | 79631 |
| 50° | 42235 |
| 55° | 17526 |
| 60° | 4712 |
| 65° | 3969 |
| 70° | 2957 |
| 75° | 2573 |
| 80° | 1918 |
| 85° | 3821 |



TEST NUMBER: P580561

CATALOG NUMBER: HC440D010-HM43040830-41WDBB

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 270.3 | 7.7 |
| 10°-20° | 784.5 | 22.3 |
| 20°-30° | 1094.8 | 31.1 |
| 30°-40° | 900.9 | 25.6 |
| 40°-50° | 371.1 | 10.5 |
| 50°-60° | 83.6 | 2.4 |
| 60°-70° | 13.4 | 0.4 |
| 70°-80° | 5.0 | 0.1 |
| 80°-90° | 1.8 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 2149.6 | 61.0 |
| 0°-40° | 3050.6 | 86.5 |
| 0°-60° | 3505.3 | 99.4 |
| 0°-90° | 3525.6 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 3525.6 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 2850 | |
| 5° | 2842 | 270 |
| 15° | 2802 | 784 |
| 25° | 2405 | 1095 |
| 35° | 1462 | 901 |
| 45° | 456 | 371 |
| 55° | 82 | 84 |
| 65° | 14 | 13 |
| 75° | 5 | 5 |
| 85° | 3 | 2 |
| 90° | 0 | |



TEST NUMBER: P580561

CATALOG NUMBER: HC440D010-HM43040830-41WDBB

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|--------|
| 0° | 2850.5 |
| 2.5° | 2836.9 |
| 5° | 2842.4 |
| 7.5° | 2831.5 |
| 10° | 2815.2 |
| 12.5° | 2807.0 |
| 15° | 2801.6 |
| 17.5° | 2752.7 |
| 20° | 2657.6 |
| 22.5° | 2538.1 |
| 25° | 2404.9 |
| 27.5° | 2244.6 |
| 30° | 2032.6 |
| 32.5° | 1771.7 |
| 35° | 1461.9 |
| 37.5° | 1149.5 |
| 40° | 861.4 |
| 42.5° | 627.8 |
| 45° | 456.5 |
| 47.5° | 326.1 |
| 50° | 220.1 |
| 52.5° | 138.6 |
| 55° | 81.5 |
| 57.5° | 40.8 |
| 60° | 19.1 |
| 62.5° | 16.3 |
| 65° | 13.6 |
| 67.5° | 10.9 |
| 70° | 8.2 |
| 72.5° | 5.4 |
| 75° | 5.4 |
| 77.5° | 2.7 |
| 80° | 2.7 |
| 82.5° | 2.7 |
| 85° | 2.7 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)