

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P592806

Luminaire Tested: **HC440D010-HM43040850-41MDC**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P592806
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC440D010-HM43040850-41MDC
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" MEDIUM DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 5000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4403.8 lumens
Efficiency: N/A
Efficacy: 107.4 lumens/watt
Spacing Criteria (0/90/45): 1 / 1 / 0.96
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 41
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P592806

CATALOG NUMBER: HC440D010-HM43040850-41MDC

Luminous Intensity Polar Plot

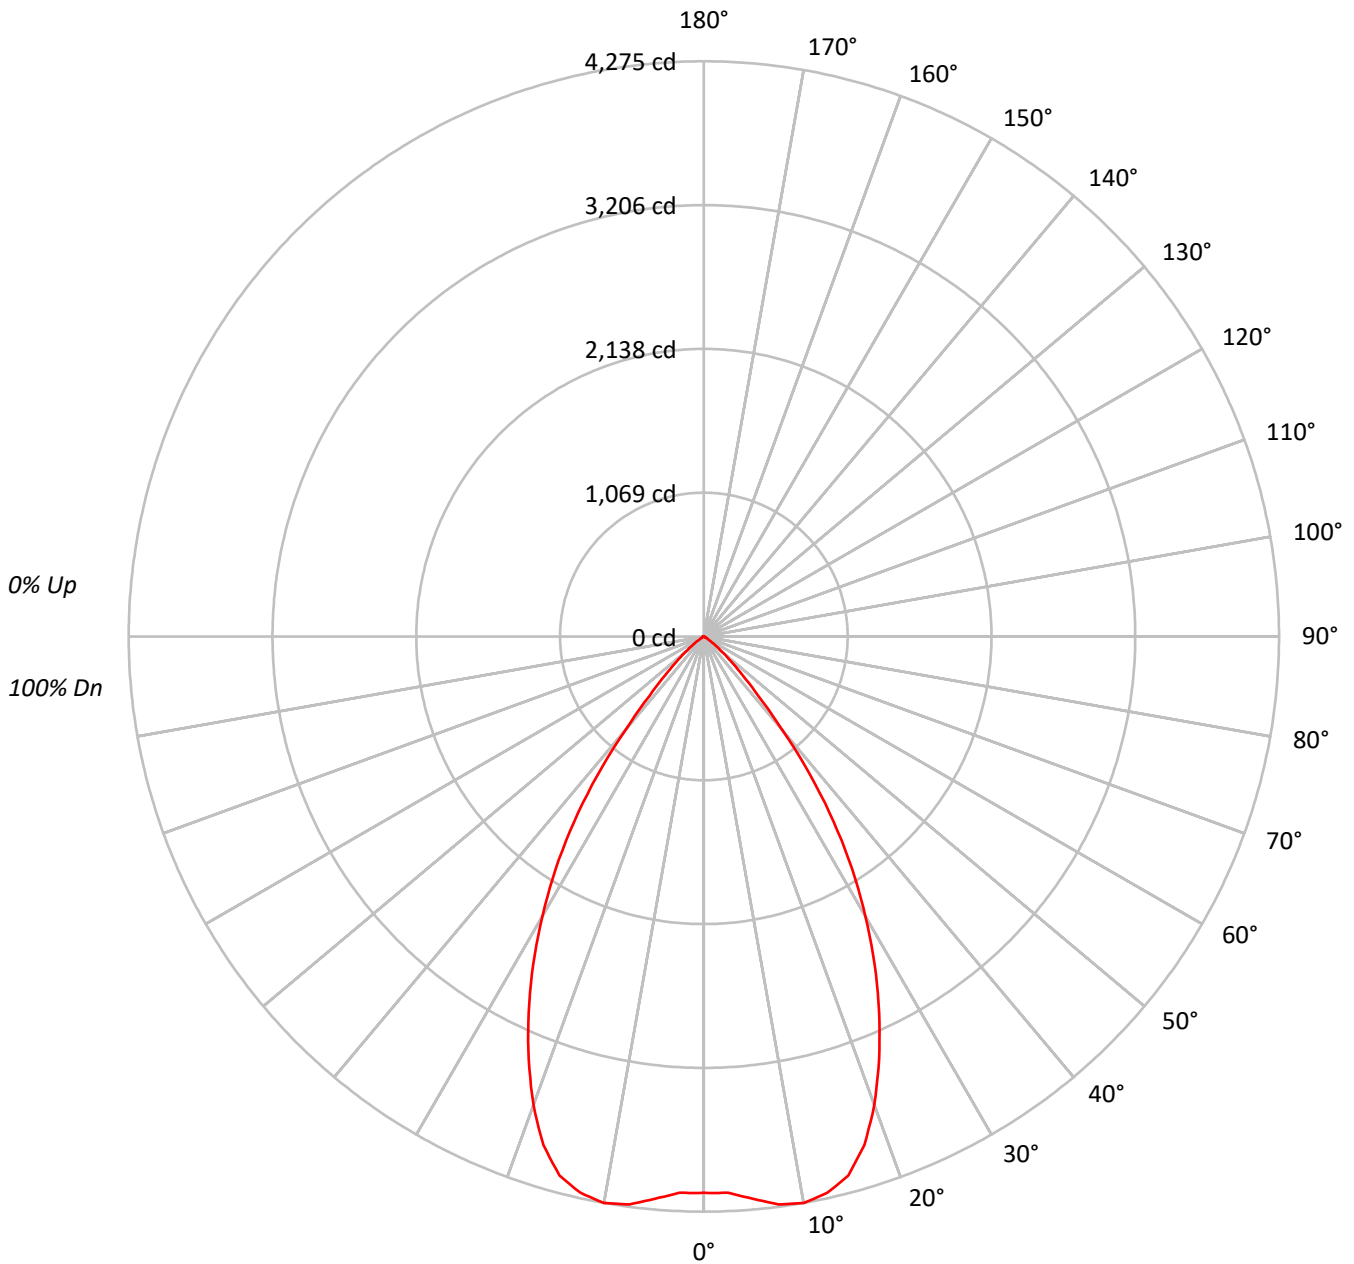



TEST NUMBER: P592806

CATALOG NUMBER: HC440D010-HM43040850-41MDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	74			
5	91	83	77	72	90	82	76	72	80	75	72	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64			
7	82	73	66	62	81	72	66	62	71	65	62	69	65	61	68	64	61	60			
8	78	68	62	58	77	68	62	58	67	61	57	65	61	57	65	60	57	56			
9	74	64	58	54	73	64	58	54	63	57	54	62	57	54	61	57	53	52			
10	70	61	55	51	69	60	54	51	59	54	50	58	54	50	58	53	50	49			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	510096
5°	519449
10°	535475
15°	529546
20°	486259
25°	419491
30°	341854
35°	253135
40°	145204
45°	70193
50°	33408
55°	11677
60°	4243
65°	2481
70°	2056
75°	1334
80°	0
85°	0



TEST NUMBER: P592806

CATALOG NUMBER: HC440D010-HM43040850-41MDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	403.5	9.2
10°-20°	1149.6	26.1
20°-30°	1403.9	31.9
30°-40°	1032.1	23.4
40°-50°	342.1	7.8
50°-60°	60.5	1.4
60°-70°	9.1	0.2
70°-80°	3.0	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2957.1	67.1
0°-40°	3989.2	90.6
0°-60°	4391.7	99.7
0°-90°	4403.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4403.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4136	
5°	4195	404
15°	4147	1150
25°	3082	1404
35°	1681	1032
45°	402	342
55°	54	60
65°	8	9
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P592806

CATALOG NUMBER: HC440D010-HM43040850-41MDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	4135.5
2.5°	4138.3
5°	4195.3
7.5°	4258.2
10°	4275.3
12.5°	4235.4
15°	4146.9
17.5°	3964.2
20°	3704.5
22.5°	3402.0
25°	3082.3
27.5°	2748.4
30°	2400.2
32.5°	2052.0
35°	1681.1
37.5°	1304.3
40°	901.8
42.5°	596.5
45°	402.4
47.5°	268.3
50°	174.1
52.5°	102.8
55°	54.3
57.5°	22.9
60°	17.2
62.5°	11.4
65°	8.5
67.5°	5.7
70°	5.7
72.5°	2.8
75°	2.8
77.5°	2.8
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)