

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P592810

Luminaire Tested: **HC440D010-HM43040850-41NDW**

Issue Date: 9/9/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P592810  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-3)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC440D010-HM43040850-41NDW  
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" NARROW DISTRIBUTION, WHITE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 5000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3924.6 lumens  
Efficiency: N/A  
Efficacy: 95.7 lumens/watt  
Spacing Criteria (0/90/45): 1.03 / 1.03 / 1.01  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 41  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P592810

CATALOG NUMBER: HC440D010-HM43040850-41NDW

### Luminous Intensity Polar Plot

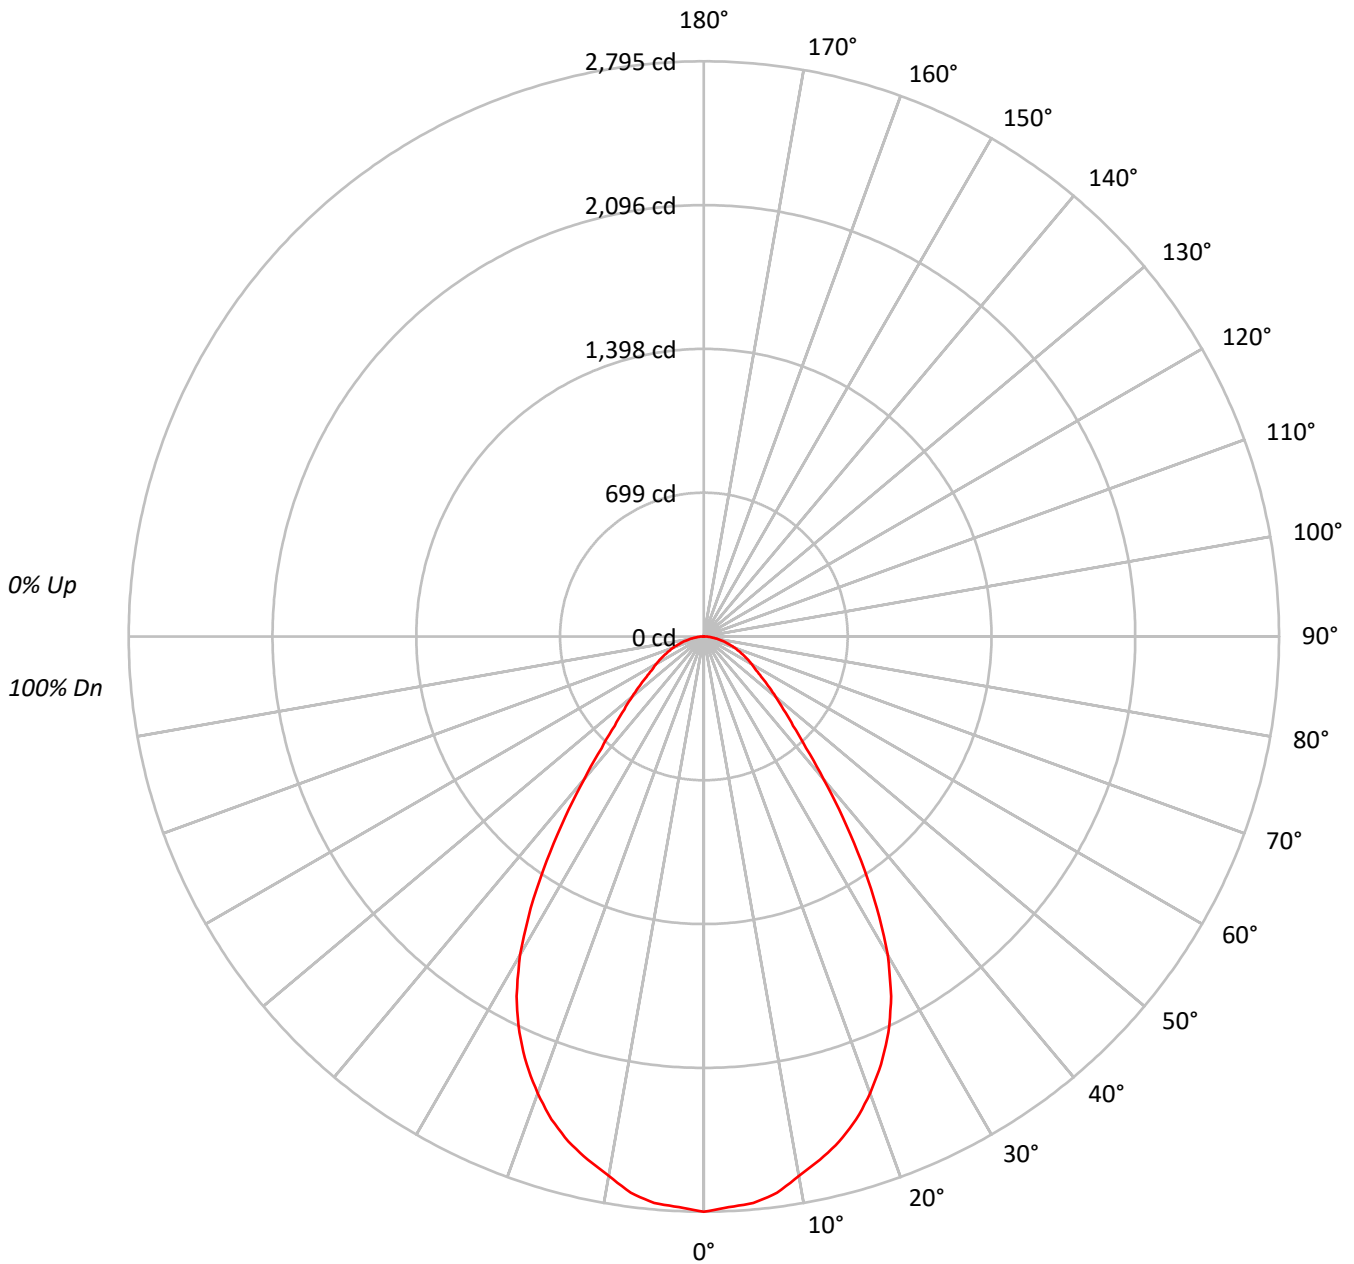



TEST NUMBER: P592810

CATALOG NUMBER: HC440D010-HM43040850-41NDW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	108	104	101	109	105	102	100	101	99	97	98	96	94	94	92	91	89			89
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79			79
3	97	88	82	77	95	87	81	76	84	79	75	82	77	74	79	76	73	71			71
4	90	81	74	68	88	80	73	68	77	72	67	75	70	66	73	69	65	64			64
5	85	74	67	61	83	73	66	61	71	65	60	69	64	60	68	63	59	58			58
6	79	68	61	56	78	67	60	55	66	60	55	64	59	55	63	58	54	52			52
7	75	63	56	51	73	62	56	51	61	55	50	60	54	50	59	53	50	48			48
8	70	59	52	47	69	58	51	46	57	51	46	56	50	46	55	50	46	44			44
9	66	55	48	43	65	54	47	43	53	47	43	52	47	43	51	46	42	41			41
10	63	51	44	40	62	51	44	40	50	44	40	49	43	39	48	43	39	38			38

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	344800
5°	342230
10°	333336
15°	324541
20°	310014
25°	288825
30°	254318
35°	200584
40°	145591
45°	106982
50°	87042
55°	72987
60°	66138
65°	60795
70°	56548
75°	51660
80°	46597
85°	40334



TEST NUMBER: P592810

CATALOG NUMBER: HC440D010-HM43040850-41NDW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	260.6	6.6
10°-20°	712.9	18.2
20°-30°	966.3	24.6
30°-40°	829.2	21.1
40°-50°	489.6	12.5
50°-60°	310.2	7.9
60°-70°	208.5	5.3
70°-80°	115.0	2.9
80°-90°	32.2	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1939.8	49.4
0°-40°	2769.0	70.6
0°-60°	3568.9	90.9
0°-90°	3924.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3924.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2795	
5°	2764	261
15°	2542	713
25°	2122	966
35°	1332	829
45°	613	490
55°	339	310
65°	208	208
75°	108	115
85°	28	32
90°	0	



TEST NUMBER: P592810

CATALOG NUMBER: HC440D010-HM43040850-41NDW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2795.4
2.5°	2775.4
5°	2764.0
7.5°	2726.9
10°	2661.4
12.5°	2604.3
15°	2541.5
17.5°	2461.6
20°	2361.8
22.5°	2250.5
25°	2122.2
27.5°	1971.1
30°	1785.6
32.5°	1566.0
35°	1332.1
37.5°	1106.8
40°	904.2
42.5°	735.9
45°	613.3
47.5°	524.9
50°	453.6
52.5°	393.6
55°	339.4
57.5°	296.6
60°	268.1
62.5°	239.6
65°	208.3
67.5°	182.6
70°	156.8
72.5°	131.2
75°	108.4
77.5°	85.5
80°	65.6
82.5°	45.6
85°	28.5
87.5°	11.4
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)