

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P592846

Luminaire Tested: **HC445D010-HM44560850-41NDW**

Issue Date: 9/9/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P592846  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-3)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC445D010-HM44560850-41NDW  
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" NARROW DISTRIBUTION, WHITE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 5000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4668.9 lumens  
Efficiency: N/A  
Efficacy: 106.1 lumens/watt  
Spacing Criteria (0/90/45): 1.03 / 1.03 / 1.01  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 44  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P592846

CATALOG NUMBER: HC445D010-HM44560850-41NDW

### Luminous Intensity Polar Plot

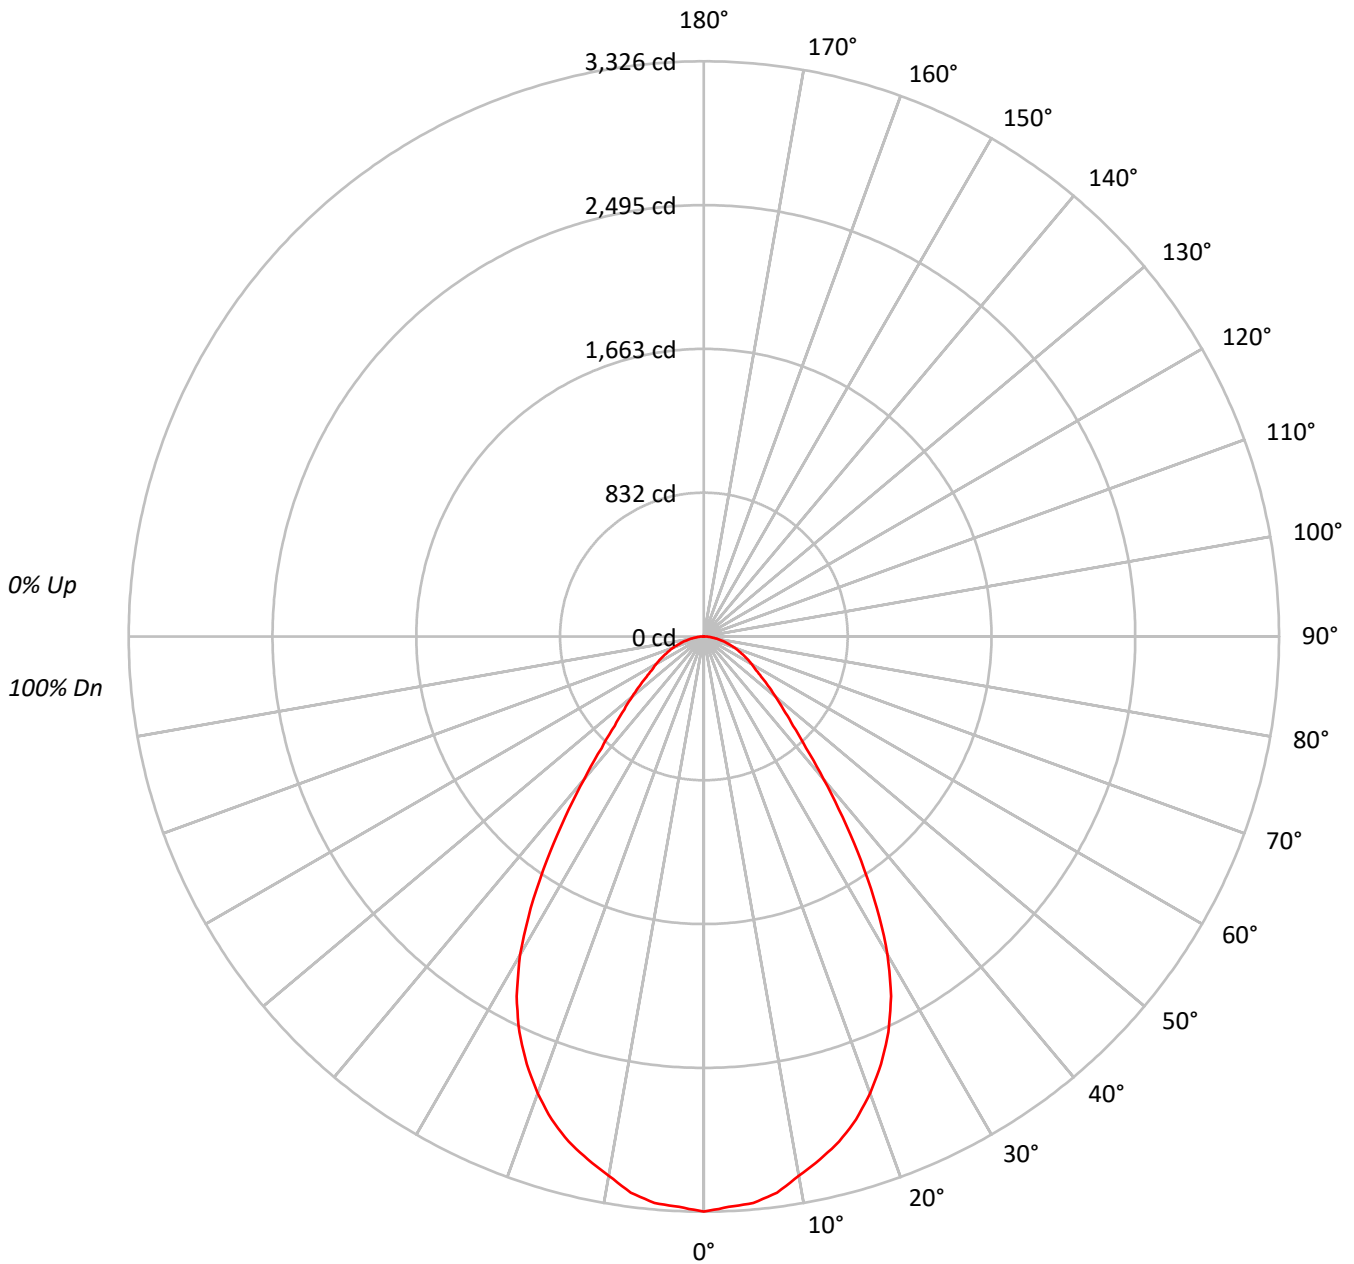



TEST NUMBER: P592846

CATALOG NUMBER: HC445D010-HM44560850-41NDW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	108	104	101	109	105	102	100	101	99	97	98	96	94	94	92	91	89			89
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79			79
3	97	88	82	77	95	87	81	76	84	79	75	82	77	74	79	76	73	71			71
4	90	81	74	68	88	80	73	68	77	72	67	75	70	66	73	69	65	64			64
5	85	74	67	61	83	73	66	61	71	65	60	69	64	60	68	63	59	58			58
6	79	68	61	56	78	67	60	55	66	60	55	64	59	55	63	58	54	52			52
7	75	63	56	51	73	62	56	51	61	55	50	60	54	50	59	53	50	48			48
8	70	59	52	47	69	58	51	46	57	51	46	56	50	46	55	50	46	44			44
9	66	55	48	43	65	54	47	43	53	47	43	52	47	43	51	46	42	41			41
10	63	51	44	40	62	51	44	40	50	44	40	49	43	39	48	43	39	38			38

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	410186
5°	407122
10°	396524
15°	386091
20°	368806
25°	343590
30°	302558
35°	238620
40°	173205
45°	127252
50°	103545
55°	86836
60°	78695
65°	72294
70°	67295
75°	61430
80°	55476
85°	47976



TEST NUMBER: P592846

CATALOG NUMBER: HC445D010-HM44560850-41NDW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	310.0	6.6
10°-20°	848.0	18.2
20°-30°	1149.6	24.6
30°-40°	986.5	21.1
40°-50°	582.5	12.5
50°-60°	369.1	7.9
60°-70°	248.0	5.3
70°-80°	136.9	2.9
80°-90°	38.3	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2307.6	49.4
0°-40°	3294.1	70.6
0°-60°	4245.7	90.9
0°-90°	4668.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4668.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3326	
5°	3288	310
15°	3024	848
25°	2525	1150
35°	1585	986
45°	730	582
55°	404	369
65°	248	248
75°	129	137
85°	34	38
90°	0	



TEST NUMBER: P592846

CATALOG NUMBER: HC445D010-HM44560850-41NDW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3325.5
2.5°	3301.7
5°	3288.1
7.5°	3244.0
10°	3165.9
12.5°	3098.2
15°	3023.5
17.5°	2928.4
20°	2809.7
22.5°	2677.3
25°	2524.6
27.5°	2344.8
30°	2124.3
32.5°	1863.0
35°	1584.7
37.5°	1316.7
40°	1075.7
42.5°	875.5
45°	729.5
47.5°	624.4
50°	539.6
52.5°	468.3
55°	403.8
57.5°	352.9
60°	319.0
62.5°	285.0
65°	247.7
67.5°	217.2
70°	186.6
72.5°	156.1
75°	128.9
77.5°	101.8
80°	78.1
82.5°	54.3
85°	33.9
87.5°	13.6
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)