

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580815

Luminaire Tested: **HC445D010-HM44560940-41MDH**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580815
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC445D010-HM44560940-41MDH
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3810.5 lumens
Efficiency: N/A
Efficacy: 86.6 lumens/watt
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.91
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 44
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580815

CATALOG NUMBER: HC445D010-HM44560940-41MDH

Luminous Intensity Polar Plot

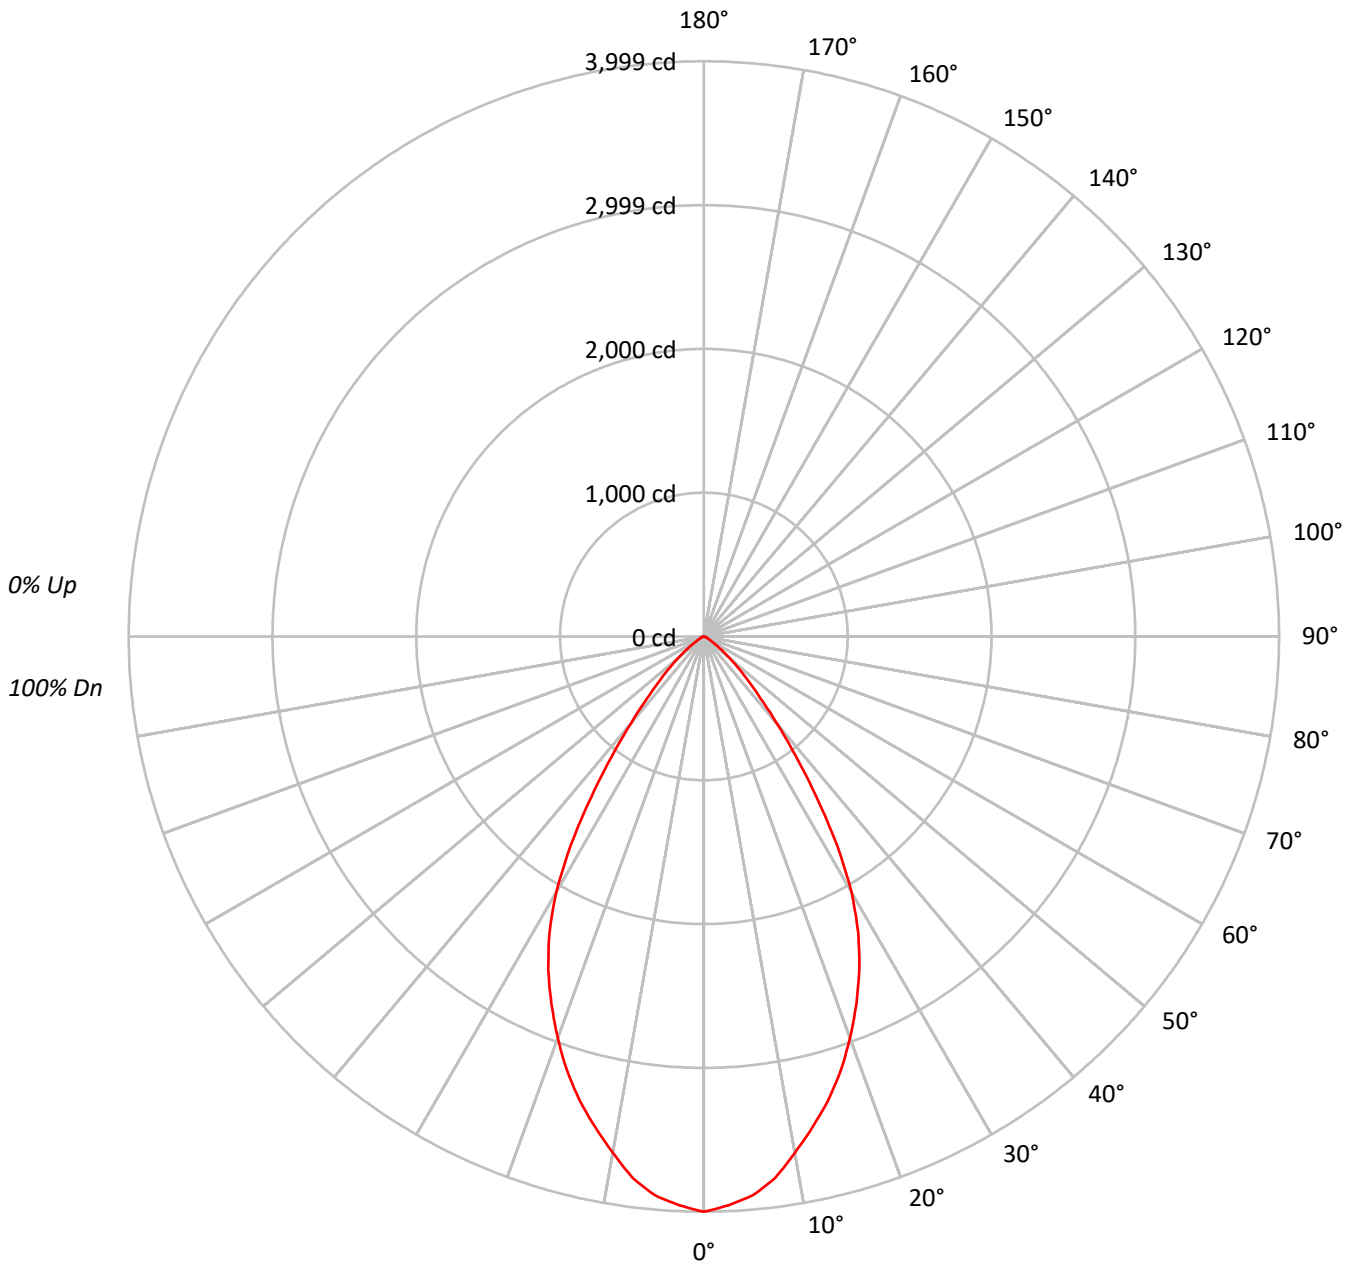



TEST NUMBER: P580815

CATALOG NUMBER: HC445D010-HM44560940-41MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86	86	86	86
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	81	79	79	79	79
4	96	88	82	78	94	87	81	77	85	80	76	82	79	75	81	77	74	73	73	73	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67	67	67	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62	62	62	62
7	81	71	65	61	80	71	65	61	69	64	60	68	63	60	67	63	60	58	58	58	58
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	56	54	54	54	54
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	60	55	52	51	51	51	51
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	47	47	47	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	493309
5°	482997
10°	456443
15°	426303
20°	389900
25°	348177
30°	292375
35°	205673
40°	126881
45°	75950
50°	44768
55°	22300
60°	11520
65°	7559
70°	4688
75°	3670
80°	1847
85°	3680



TEST NUMBER: P580815

CATALOG NUMBER: HC445D010-HM44560940-41MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	364.3	9.6
10°-20°	933.2	24.5
20°-30°	1163.8	30.5
30°-40°	857.2	22.5
40°-50°	352.6	9.3
50°-60°	103.0	2.7
60°-70°	26.5	0.7
70°-80°	8.2	0.2
80°-90°	1.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2461.3	64.6
0°-40°	3318.5	87.1
0°-60°	3774.1	99.0
0°-90°	3810.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3810.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3999	
5°	3901	364
15°	3338	933
25°	2558	1164
35°	1366	857
45°	435	353
55°	104	103
65°	26	27
75°	8	8
85°	3	2
90°	0	



TEST NUMBER: P580815

CATALOG NUMBER: HC445D010-HM44560940-41MDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	3999.4
2.5°	3957.9
5°	3900.9
7.5°	3797.2
10°	3644.3
12.5°	3493.9
15°	3338.4
17.5°	3164.7
20°	2970.4
22.5°	2768.2
25°	2558.3
27.5°	2325.0
30°	2052.8
32.5°	1723.6
35°	1365.9
37.5°	1049.7
40°	788.0
42.5°	583.2
45°	435.4
47.5°	321.5
50°	233.3
52.5°	160.7
55°	103.7
57.5°	62.2
60°	46.7
62.5°	33.7
65°	25.9
67.5°	18.2
70°	13.0
72.5°	10.3
75°	7.7
77.5°	5.2
80°	2.6
82.5°	2.6
85°	2.6
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)