

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580869

Luminaire Tested: **HC450D010-HM44560835-41MDH**

Issue Date: 9/9/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P580869  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-5)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC450D010-HM44560835-41MDH  
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" MEDIUM DISTRIBUTION, HAZE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4622.2 lumens  
Efficiency: N/A  
Efficacy: 96.3 lumens/watt  
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.91  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 48  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P580869

CATALOG NUMBER: HC450D010-HM44560835-41MDH

### Luminous Intensity Polar Plot

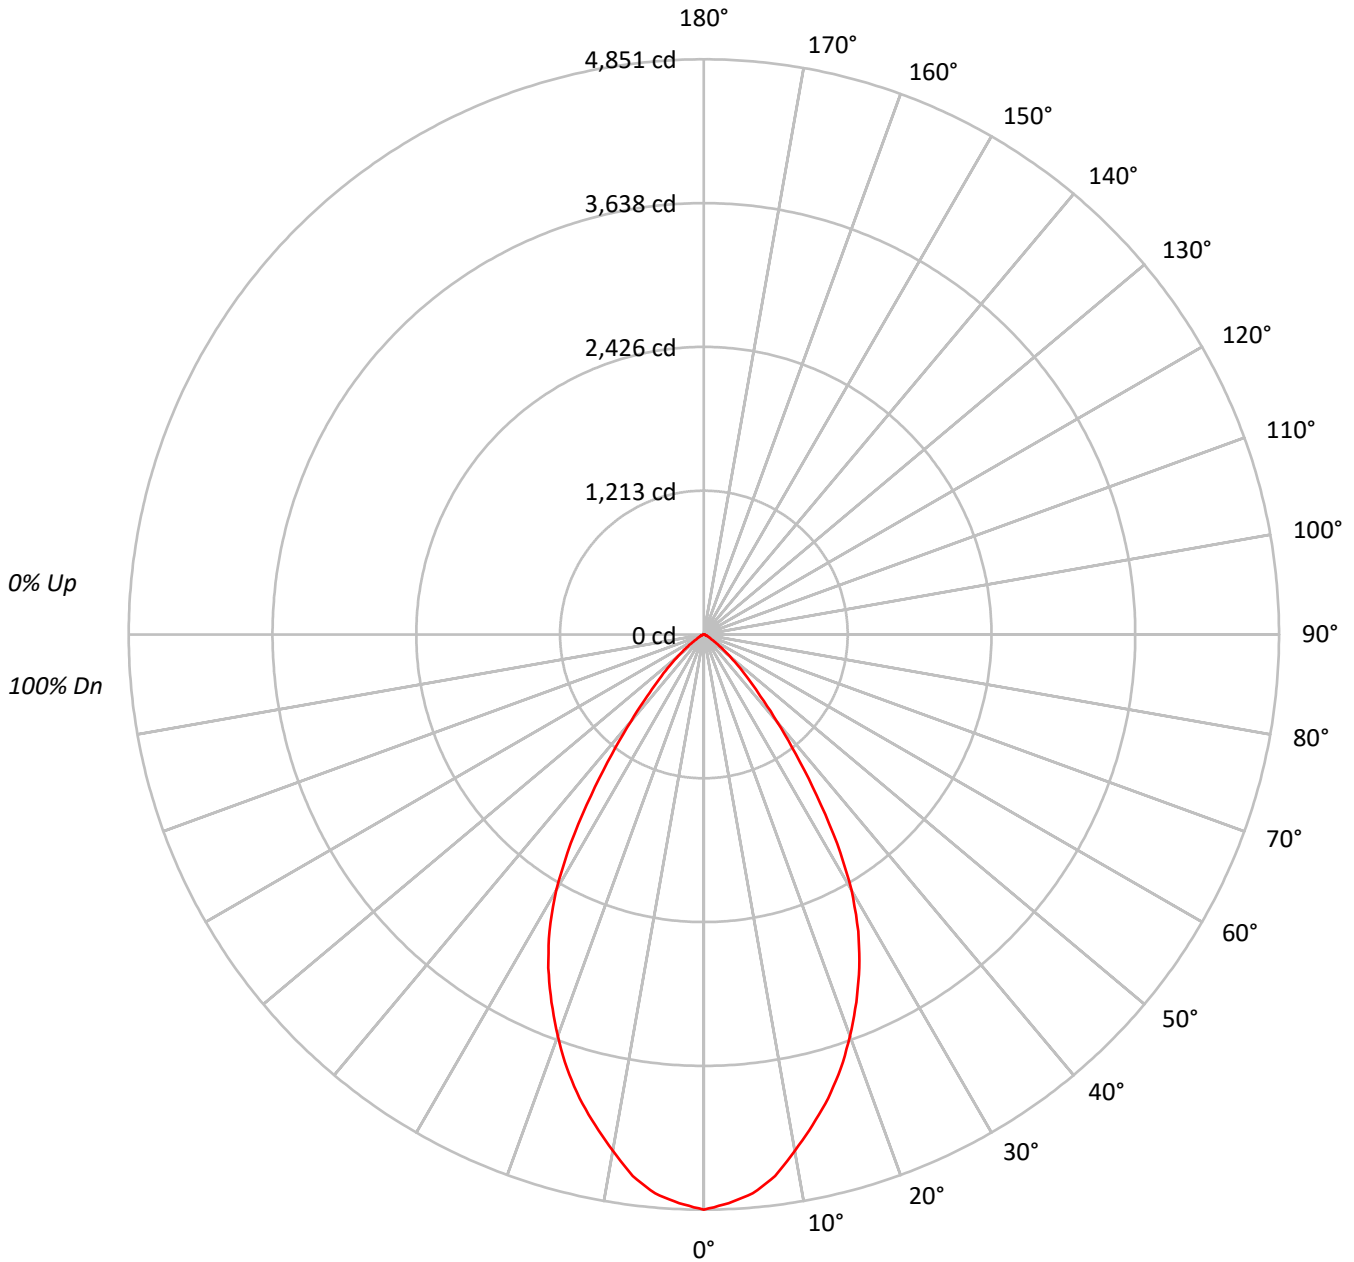



TEST NUMBER: P580869

CATALOG NUMBER: HC450D010-HM44560835-41MDH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86	86	86	86
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	81	79	79	79	79
4	96	88	82	78	94	87	81	77	85	80	76	82	79	75	81	77	74	73	73	73	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67	67	67	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62	62	62	62
7	81	71	65	61	80	71	65	61	69	64	60	68	63	60	67	63	60	58	58	58	58
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	56	54	54	54	54
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	60	55	52	51	51	51	51
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	47	47	47	47

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	598387
5°	585889
10°	553673
15°	517121
20°	472962
25°	422349
30°	354658
35°	249506
40°	153899
45°	92155
50°	54286
55°	27053
60°	13963
65°	9164
70°	5662
75°	4480
80°	2202
85°	4387



TEST NUMBER: P580869

CATALOG NUMBER: HC450D010-HM44560835-41MDH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	441.9	9.6
10°-20°	1132.0	24.5
20°-30°	1411.7	30.5
30°-40°	1039.9	22.5
40°-50°	427.7	9.3
50°-60°	124.9	2.7
60°-70°	32.1	0.7
70°-80°	9.9	0.2
80°-90°	2.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2985.6	64.6
0°-40°	4025.5	87.1
0°-60°	4578.1	99.0
0°-90°	4622.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4622.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4851	
5°	4732	442
15°	4050	1132
25°	3103	1412
35°	1657	1040
45°	528	428
55°	126	125
65°	31	32
75°	9	10
85°	3	2
90°	0	



TEST NUMBER: P580869

CATALOG NUMBER: HC450D010-HM44560835-41MDH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4851.3
2.5°	4801.1
5°	4731.9
7.5°	4606.1
10°	4420.6
12.5°	4238.3
15°	4049.6
17.5°	3839.0
20°	3603.2
22.5°	3357.9
25°	3103.3
27.5°	2820.3
30°	2490.1
32.5°	2090.8
35°	1657.0
37.5°	1273.4
40°	955.8
42.5°	707.4
45°	528.3
47.5°	389.9
50°	282.9
52.5°	194.9
55°	125.8
57.5°	75.5
60°	56.6
62.5°	40.8
65°	31.4
67.5°	22.0
70°	15.7
72.5°	12.6
75°	9.4
77.5°	6.3
80°	3.1
82.5°	3.1
85°	3.1
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)