

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580983

Luminaire Tested: **HC405D010-HM40525827-41WDC**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580983
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-7)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC405D010-HM40525827-41WDC
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 677.6 lumens
Efficiency: N/A
Efficacy: 112.9 lumens/watt
Spacing Criteria (0/90/45): 1.25 / 1.25 / 1.11
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580983

CATALOG NUMBER: HC405D010-HM40525827-41WDC

Luminous Intensity Polar Plot

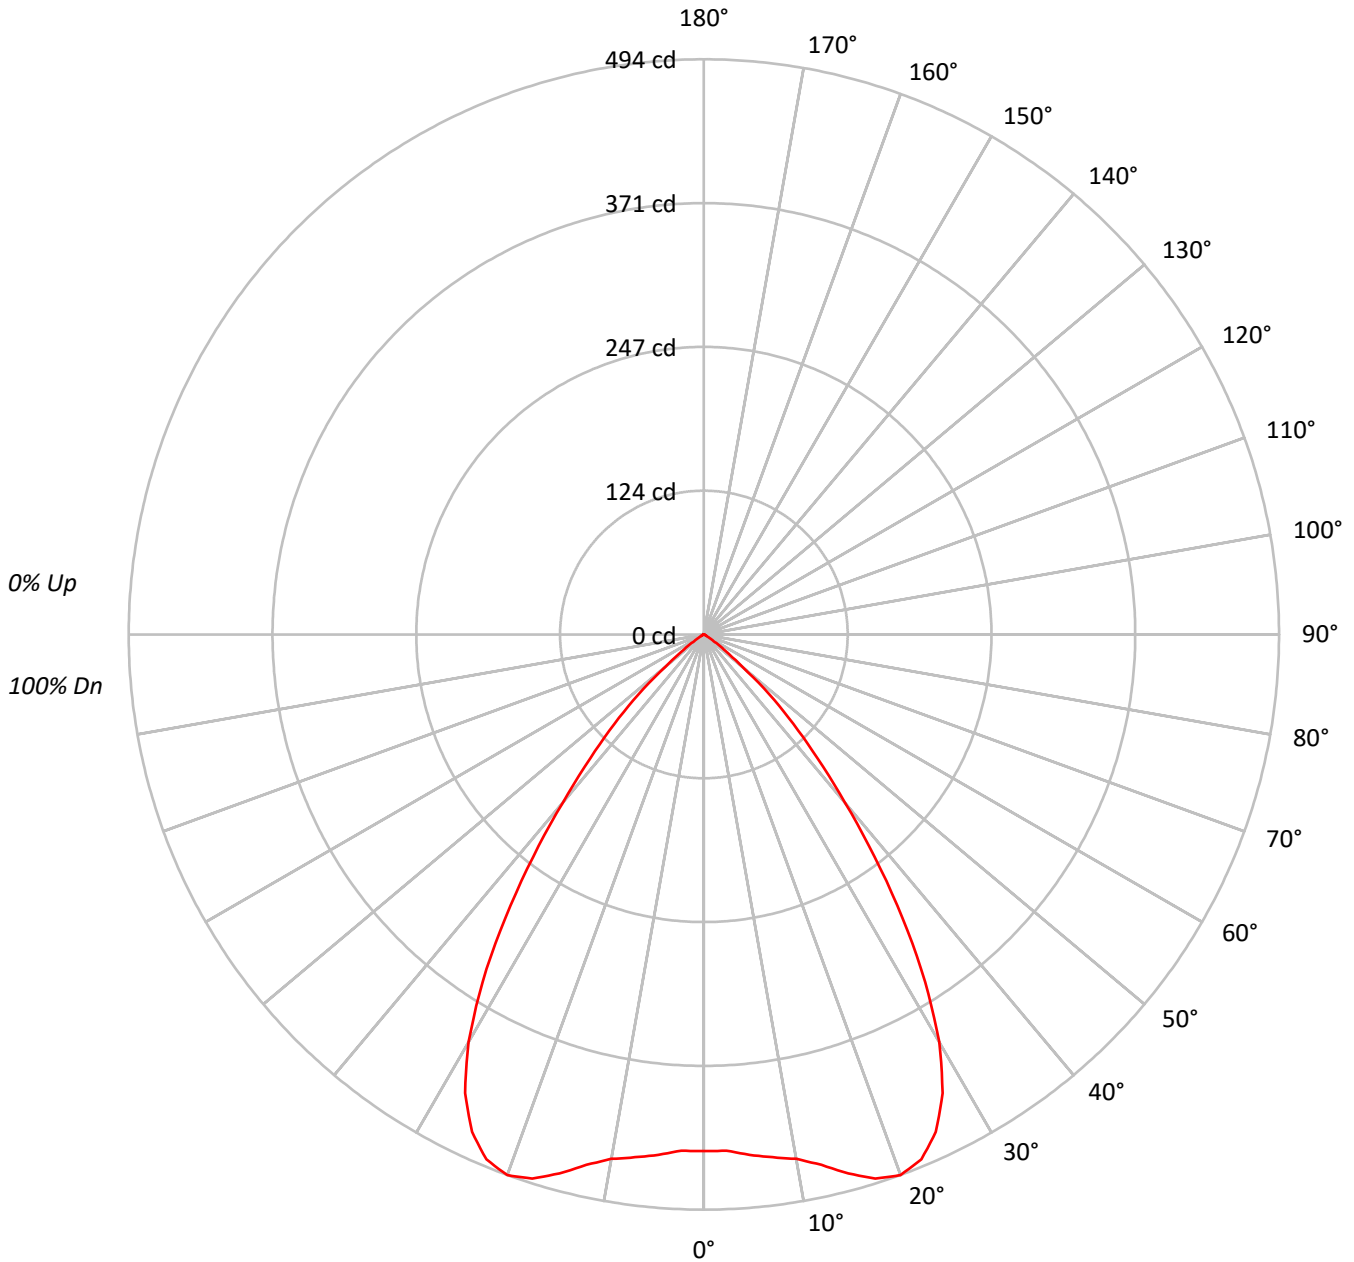



TEST NUMBER: P580983

CATALOG NUMBER: HC405D010-HM40525827-41WDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92	92	92	92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85	85	85	85
3	101	93	88	84	98	92	87	83	89	85	82	87	83	80	85	82	79	77	77	77	77
4	95	86	80	76	93	85	79	75	83	78	74	81	77	73	79	75	72	71	71	71	71
5	89	80	73	69	87	79	73	68	77	72	68	75	71	67	74	70	66	65	65	65	65
6	84	74	67	63	82	73	67	62	72	66	62	70	65	62	69	64	61	60	60	60	60
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55	55	55	55
8	75	64	57	53	73	63	57	53	62	57	53	61	56	52	60	56	52	51	51	51	51
9	70	60	53	49	69	59	53	49	58	53	49	57	52	48	56	52	48	47	47	47	47
10	67	56	50	45	66	55	49	45	55	49	45	54	49	45	53	48	45	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	54728
5°	55544
10°	57276
15°	61192
20°	64856
25°	64142
30°	57569
35°	44797
40°	30352
45°	18944
50°	8213
55°	2753
60°	691
65°	467
70°	289
75°	238
80°	355
85°	0



TEST NUMBER: P580983

CATALOG NUMBER: HC405D010-HM40525827-41WDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	43.1	6.4
10°-20°	136.0	20.1
20°-30°	213.2	31.5
30°-40°	184.0	27.2
40°-50°	84.6	12.5
50°-60°	14.4	2.1
60°-70°	1.6	0.2
70°-80°	0.6	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	392.3	57.9
0°-40°	576.3	85.0
0°-60°	675.2	99.7
0°-90°	677.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	677.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	444	
5°	449	43
15°	479	136
25°	471	213
35°	298	184
45°	109	85
55°	13	14
65°	2	2
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P580983

CATALOG NUMBER: HC405D010-HM40525827-41WDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	443.7
2.5°	443.7
5°	448.6
7.5°	452.9
10°	457.3
12.5°	466.5
15°	479.2
17.5°	490.0
20°	494.1
22.5°	488.0
25°	471.3
27.5°	444.1
30°	404.2
32.5°	353.9
35°	297.5
37.5°	240.8
40°	188.5
42.5°	144.1
45°	108.6
47.5°	76.3
50°	42.8
52.5°	23.6
55°	12.8
57.5°	6.4
60°	2.8
62.5°	2.0
65°	1.6
67.5°	1.2
70°	0.8
72.5°	0.8
75°	0.5
77.5°	0.5
80°	0.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)