

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580985

Luminaire Tested: **HC405D010-HM40525827-41NDW**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580985
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-3)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC405D010-HM40525827-41NDW
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" NARROW DISTRIBUTION, WHITE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 549.3 lumens
Efficiency: N/A
Efficacy: 91.6 lumens/watt
Spacing Criteria (0/90/45): 1.03 / 1.03 / 1.01
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580985

CATALOG NUMBER: HC405D010-HM40525827-41NDW

Luminous Intensity Polar Plot

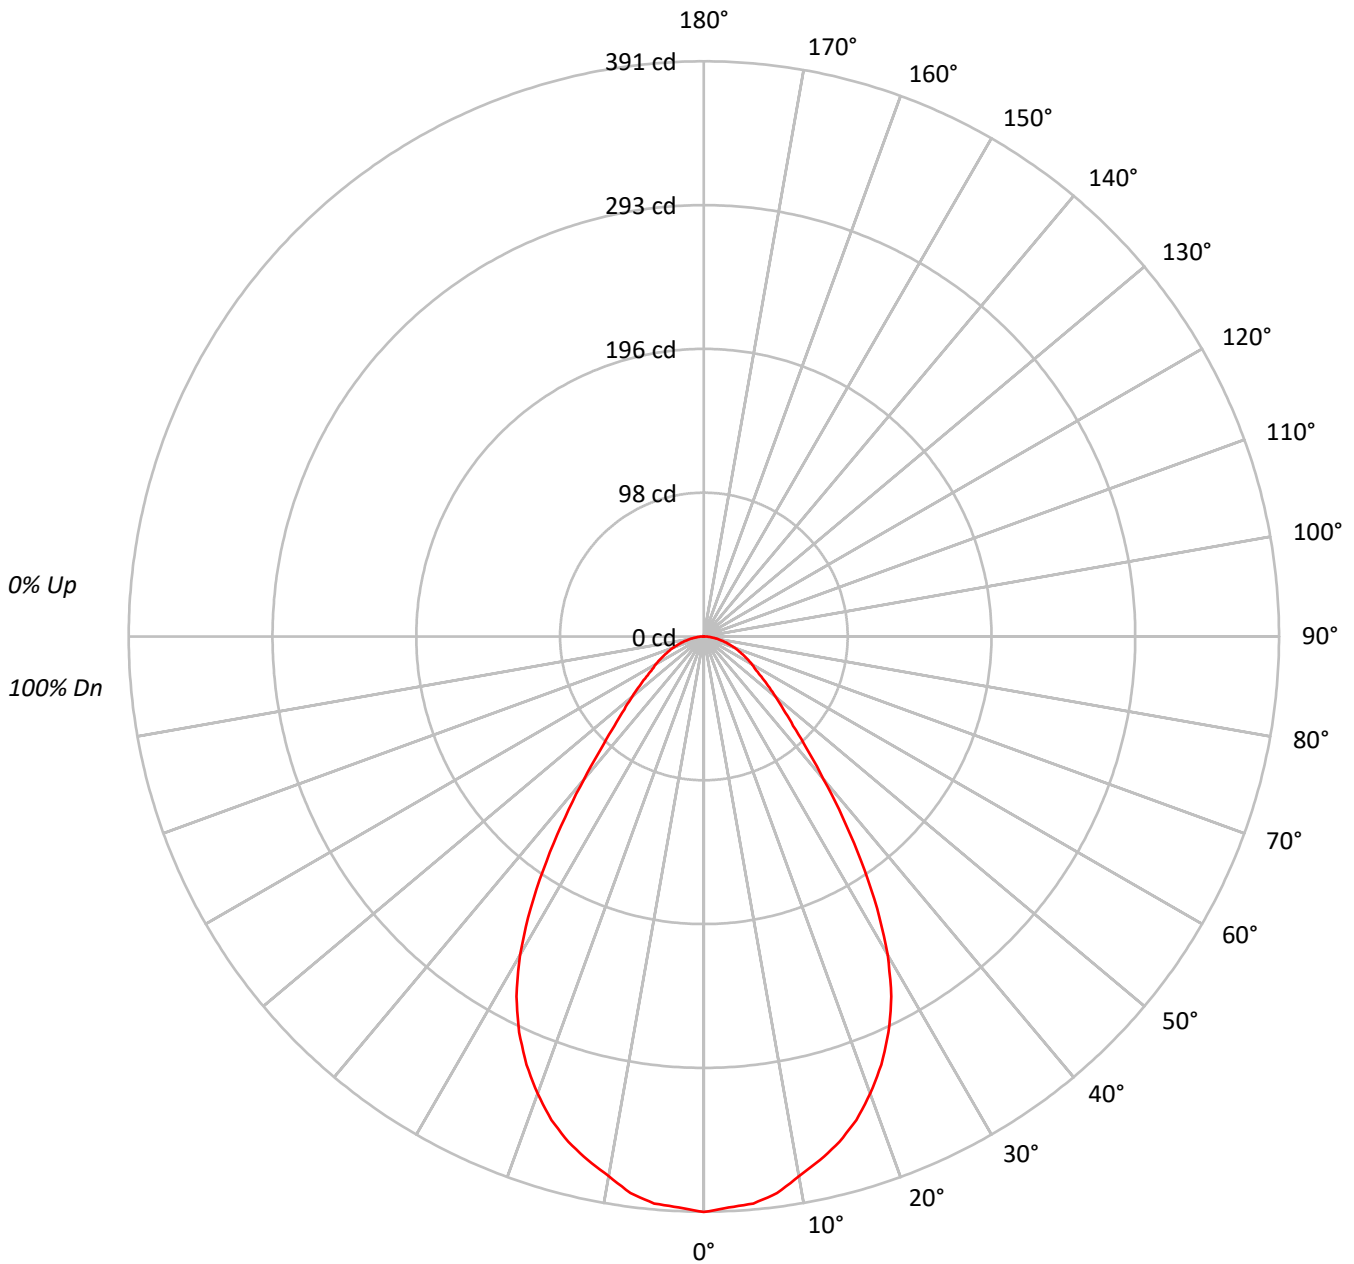



TEST NUMBER: P580985

CATALOG NUMBER: HC405D010-HM40525827-41NDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	111	108	104	101	109	105	102	100	101	99	97	98	96	94	94	92	91	89	89	89	89
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79	79	79	79
3	97	88	82	77	95	87	81	76	84	79	75	82	77	74	79	76	73	71	71	71	71
4	90	81	74	68	88	80	73	68	77	72	67	75	70	66	73	69	65	64	64	64	64
5	85	74	67	61	83	73	66	61	71	65	60	69	64	60	68	63	59	58	58	58	58
6	79	68	61	56	78	67	60	55	66	60	55	64	59	55	63	58	54	52	52	52	52
7	75	63	56	51	73	62	56	51	61	55	50	60	54	50	59	53	50	48	48	48	48
8	70	59	52	47	69	58	51	46	57	51	46	56	50	46	55	50	46	44	44	44	44
9	66	55	48	43	65	54	47	43	53	47	43	52	47	43	51	46	42	41	41	41	41
10	63	51	44	40	62	51	44	40	50	44	40	49	43	39	48	43	39	38	38	38	38

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	48253
5°	47905
10°	46655
15°	45422
20°	43395
25°	40421
30°	35593
35°	28083
40°	20385
45°	14967
50°	12166
55°	10236
60°	9276
65°	8522
70°	7898
75°	7244
80°	6535
85°	5661



TEST NUMBER: P580985

CATALOG NUMBER: HC405D010-HM40525827-41NDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	36.5	6.6
10°-20°	99.8	18.2
20°-30°	135.3	24.6
30°-40°	116.1	21.1
40°-50°	68.5	12.5
50°-60°	43.4	7.9
60°-70°	29.2	5.3
70°-80°	16.1	2.9
80°-90°	4.5	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	271.5	49.4
0°-40°	387.6	70.6
0°-60°	499.5	90.9
0°-90°	549.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	549.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	391	
5°	387	36
15°	356	100
25°	297	135
35°	186	116
45°	86	69
55°	48	43
65°	29	29
75°	15	16
85°	4	5
90°	0	



TEST NUMBER: P580985

CATALOG NUMBER: HC405D010-HM40525827-41NDW

CANDELA DISTRIBUTION (FULL):

	0°
0°	391.2
2.5°	388.5
5°	386.9
7.5°	381.7
10°	372.5
12.5°	364.6
15°	355.7
17.5°	344.6
20°	330.6
22.5°	315.0
25°	297.0
27.5°	275.9
30°	249.9
32.5°	219.2
35°	186.5
37.5°	154.9
40°	126.6
42.5°	103.1
45°	85.8
47.5°	73.4
50°	63.4
52.5°	55.0
55°	47.6
57.5°	41.5
60°	37.6
62.5°	33.5
65°	29.2
67.5°	25.5
70°	21.9
72.5°	18.4
75°	15.2
77.5°	12.0
80°	9.2
82.5°	6.4
85°	4.0
87.5°	1.6
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)