

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P580995

Luminaire Tested: **HC405D010-HM40525830-41MDH**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P580995
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-5)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC405D010-HM40525830-41MDH
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" MEDIUM DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 635.7 lumens
Efficiency: N/A
Efficacy: 105.9 lumens/watt
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.91
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P580995

CATALOG NUMBER: HC405D010-HM40525830-41MDH

Luminous Intensity Polar Plot

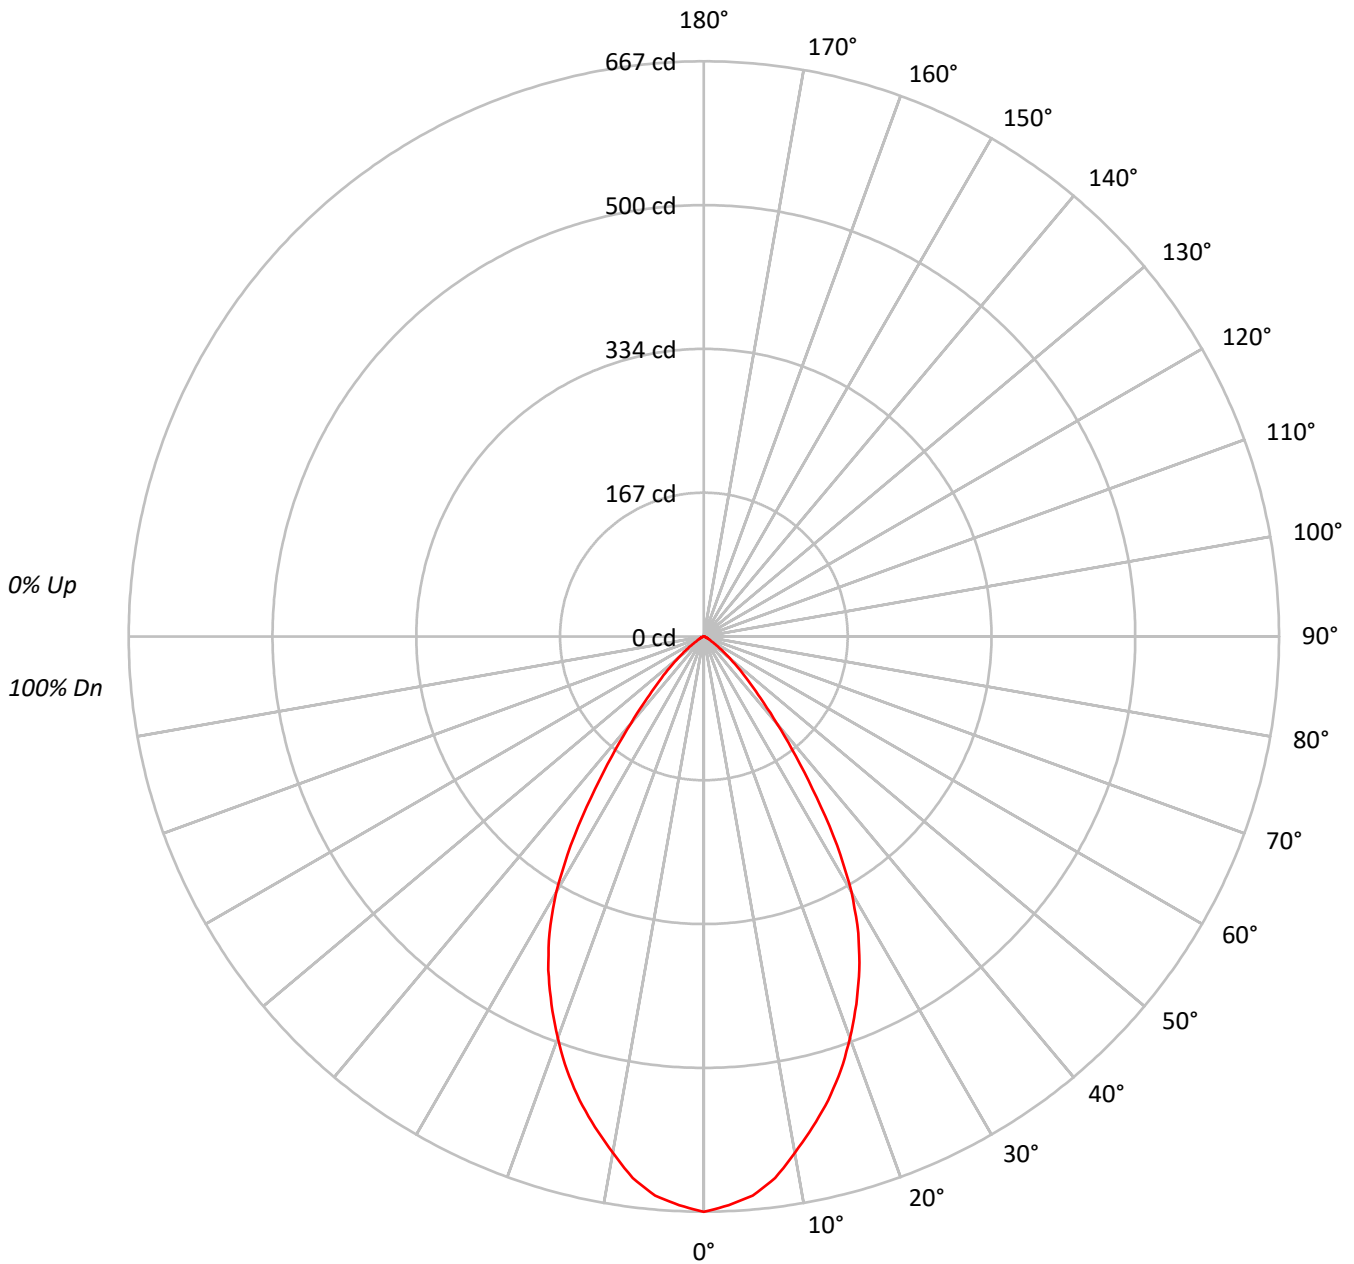



TEST NUMBER: P580995

CATALOG NUMBER: HC405D010-HM40525830-41MDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86	86	86	86
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	81	79	79	79	79
4	96	88	82	78	94	87	81	77	85	80	76	82	79	75	81	77	74	73	73	73	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67	67	67	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	62	62	62	62
7	81	71	65	61	80	71	65	61	69	64	60	68	63	60	67	63	60	58	58	58	58
8	77	67	61	56	76	66	60	56	65	60	56	64	59	56	63	59	56	54	54	54	54
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	60	55	52	51	51	51	51
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	47	47	47	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	82296
5°	80568
10°	76139
15°	71102
20°	65040
25°	58086
30°	48767
35°	34317
40°	21158
45°	12664
50°	7465
55°	3720
60°	1924
65°	1255
70°	793
75°	572
80°	355
85°	708



TEST NUMBER: P580995

CATALOG NUMBER: HC405D010-HM40525830-41MDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.8	9.6
10°-20°	155.7	24.5
20°-30°	194.1	30.5
30°-40°	143.0	22.5
40°-50°	58.8	9.3
50°-60°	17.2	2.7
60°-70°	4.5	0.7
70°-80°	1.4	0.2
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	410.5	64.6
0°-40°	553.5	87.1
0°-60°	629.5	99.0
0°-90°	635.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	635.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	667	
5°	651	61
15°	557	156
25°	427	194
35°	228	143
45°	73	59
55°	17	17
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P580995

CATALOG NUMBER: HC405D010-HM40525830-41MDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	667.2
2.5°	660.2
5°	650.7
7.5°	633.4
10°	607.9
12.5°	582.8
15°	556.8
17.5°	527.9
20°	495.5
22.5°	461.7
25°	426.8
27.5°	387.8
30°	342.4
32.5°	287.5
35°	227.9
37.5°	175.1
40°	131.4
42.5°	97.3
45°	72.6
47.5°	53.6
50°	38.9
52.5°	26.8
55°	17.3
57.5°	10.3
60°	7.8
62.5°	5.7
65°	4.3
67.5°	3.1
70°	2.2
72.5°	1.7
75°	1.2
77.5°	0.9
80°	0.5
82.5°	0.5
85°	0.5
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)