

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581019

Luminaire Tested: **HC405D010-HM40525835-41WDC**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P581019
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-7)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC405D010-HM40525835-41WDC
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 760.7 lumens
Efficiency: N/A
Efficacy: 126.8 lumens/watt
Spacing Criteria (0/90/45): 1.25 / 1.25 / 1.11
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581019

CATALOG NUMBER: HC405D010-HM40525835-41WDC

Luminous Intensity Polar Plot

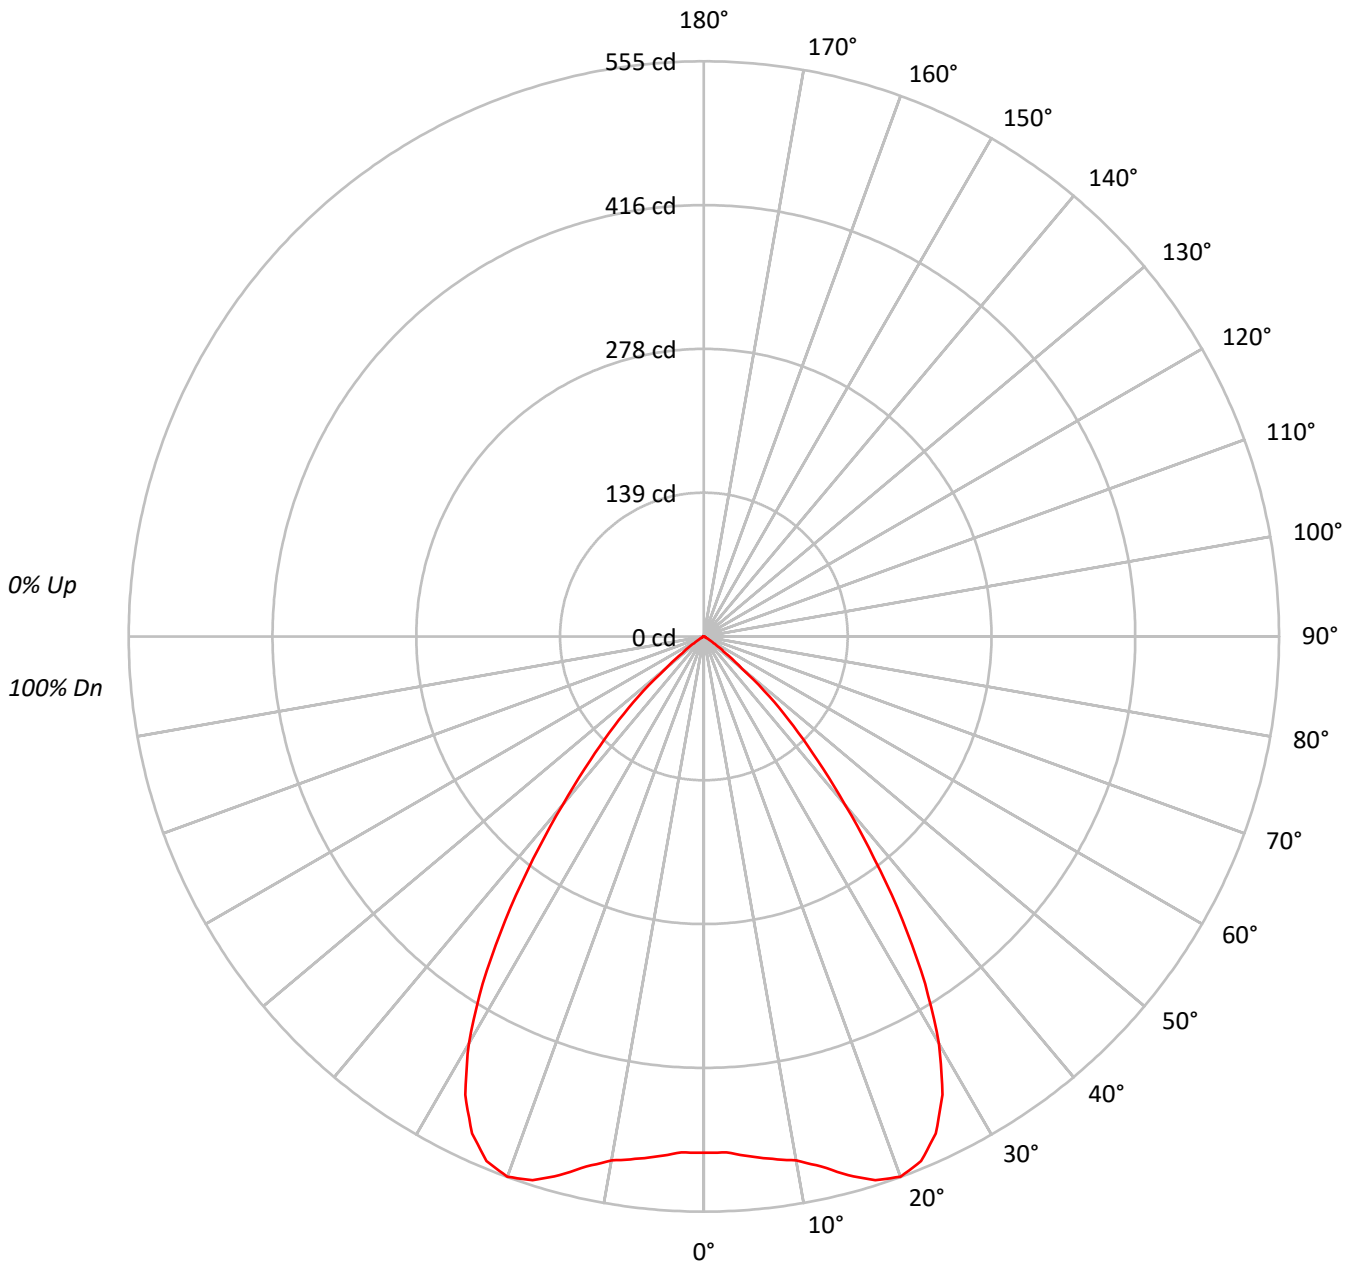



TEST NUMBER: P581019

CATALOG NUMBER: HC405D010-HM40525835-41WDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92		
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85		
3	101	93	88	84	98	92	87	83	89	85	82	87	83	80	85	82	79	77		
4	95	86	80	76	93	85	79	75	83	78	74	81	77	73	79	75	72	71		
5	89	80	73	69	87	79	73	68	77	72	68	75	71	67	74	70	66	65		
6	84	74	67	63	82	73	67	62	72	66	62	70	65	62	69	64	61	60		
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55		
8	75	64	57	53	73	63	57	53	62	57	53	61	56	52	60	56	52	51		
9	70	60	53	49	69	59	53	49	58	53	49	57	52	48	56	52	48	47		
10	67	56	50	45	66	55	49	45	55	49	45	54	49	45	53	48	45	43		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	61451
5°	62342
10°	64303
15°	68714
20°	72811
25°	72009
30°	64633
35°	50293
40°	34087
45°	21281
50°	9211
55°	3075
60°	789
65°	525
70°	325
75°	238
80°	355
85°	0



TEST NUMBER: P581019

CATALOG NUMBER: HC405D010-HM40525835-41WDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	48.4	6.4
10°-20°	152.7	20.1
20°-30°	239.3	31.5
30°-40°	206.5	27.2
40°-50°	95.0	12.5
50°-60°	16.1	2.1
60°-70°	1.9	0.2
70°-80°	0.7	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	440.4	57.9
0°-40°	647.0	85.0
0°-60°	758.1	99.7
0°-90°	760.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	760.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	498	
5°	504	48
15°	538	153
25°	529	239
35°	334	207
45°	122	95
55°	14	16
65°	2	2
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P581019

CATALOG NUMBER: HC405D010-HM40525835-41WDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	498.2
2.5°	498.2
5°	503.5
7.5°	508.5
10°	513.4
12.5°	523.7
15°	538.1
17.5°	550.1
20°	554.7
22.5°	547.9
25°	529.1
27.5°	498.6
30°	453.8
32.5°	397.2
35°	334.0
37.5°	270.4
40°	211.7
42.5°	161.9
45°	122.0
47.5°	85.7
50°	48.0
52.5°	26.4
55°	14.3
57.5°	7.2
60°	3.2
62.5°	2.3
65°	1.8
67.5°	1.4
70°	0.9
72.5°	0.9
75°	0.5
77.5°	0.5
80°	0.5
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)