

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581074

Luminaire Tested: **HC405D010-HM40525930-41MDW**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P581074
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-6)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC405D010-HM40525930-41MDW
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" MEDIUM DISTRIBUTION, WHITE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 548.7 lumens
Efficiency: N/A
Efficacy: 91.5 lumens/watt
Spacing Criteria (0/90/45): 1.04 / 1.04 / 1.01
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581074

CATALOG NUMBER: HC405D010-HM40525930-41MDW

Luminous Intensity Polar Plot

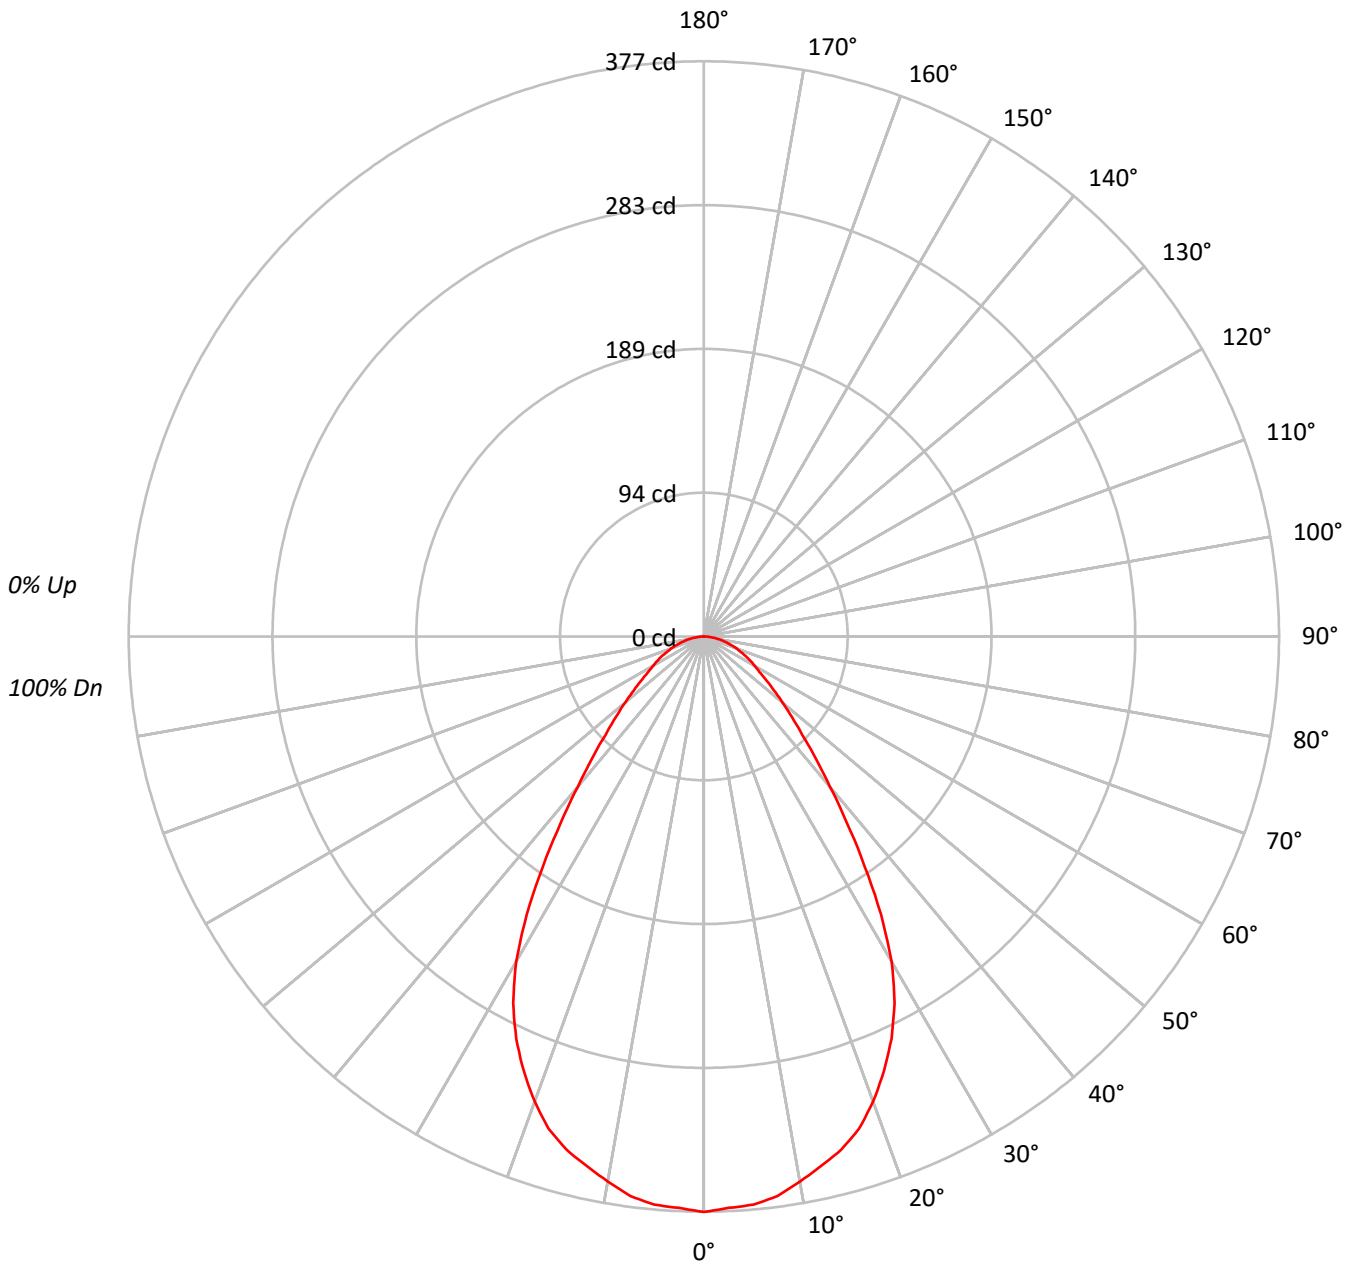



TEST NUMBER: P581074

CATALOG NUMBER: HC405D010-HM40525930-41MDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	108	104	101	109	105	102	100	101	99	97	97	95	94	94	92	91	89			89
2	104	97	92	87	101	95	90	86	92	88	84	89	85	82	86	83	81	79			79
3	97	88	82	76	94	87	81	76	84	79	75	81	77	73	79	75	72	70			70
4	90	80	73	68	88	79	73	67	77	71	67	75	70	66	73	68	65	63			63
5	84	74	66	61	82	73	66	61	71	65	60	69	64	59	67	63	59	57			57
6	79	68	60	55	77	67	60	55	65	59	54	64	58	54	62	57	54	52			52
7	74	63	55	50	73	62	55	50	61	54	50	59	54	49	58	53	49	47			47
8	70	58	51	46	68	58	51	46	56	50	46	55	50	45	54	49	45	44			44
9	66	54	47	42	65	54	47	42	53	46	42	52	46	42	51	46	42	40			40
10	62	51	44	39	61	50	44	39	49	43	39	48	43	39	48	42	39	37			37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	46526
5°	46283
10°	45428
15°	44464
20°	42568
25°	39591
30°	35037
35°	27646
40°	20691
45°	15926
50°	12914
55°	10709
60°	9473
65°	8785
70°	8114
75°	7387
80°	6748
85°	5236



TEST NUMBER: P581074

CATALOG NUMBER: HC405D010-HM40525930-41MDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	35.3	6.4
10°-20°	97.7	17.8
20°-30°	132.6	24.2
30°-40°	114.9	20.9
40°-50°	72.1	13.1
50°-60°	45.4	8.3
60°-70°	29.8	5.4
70°-80°	16.4	3.0
80°-90°	4.5	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	265.6	48.4
0°-40°	380.5	69.3
0°-60°	498.0	90.8
0°-90°	548.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	548.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	377	
5°	374	35
15°	348	98
25°	291	133
35°	184	115
45°	91	72
55°	50	45
65°	30	30
75°	16	16
85°	4	4
90°	0	



TEST NUMBER: P581074

CATALOG NUMBER: HC405D010-HM40525930-41MDW

CANDELA DISTRIBUTION (FULL):

	0°
0°	377.2
2.5°	374.9
5°	373.8
7.5°	369.9
10°	362.7
12.5°	355.5
15°	348.2
17.5°	338.3
20°	324.3
22.5°	308.4
25°	290.9
27.5°	270.7
30°	246.0
32.5°	216.0
35°	183.6
37.5°	154.0
40°	128.5
42.5°	108.4
45°	91.3
47.5°	78.3
50°	67.3
52.5°	57.8
55°	49.8
57.5°	43.0
60°	38.4
62.5°	34.2
65°	30.1
67.5°	25.9
70°	22.5
72.5°	18.6
75°	15.5
77.5°	12.1
80°	9.5
82.5°	6.5
85°	3.7
87.5°	1.5
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)