

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581094

Luminaire Tested: **HC405D010-HM40525935-41PSMDW**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P581094
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-12)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC405D010-HM40525935-41PSMDW
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" PLASTIC TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 566.0 lumens
Efficiency: N/A
Efficacy: 94.3 lumens/watt
Spacing Criteria (0/90/45): 1.03 / 1.03 / 0.99
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581094

CATALOG NUMBER: HC405D010-HM40525935-41PSMDW

Luminous Intensity Polar Plot

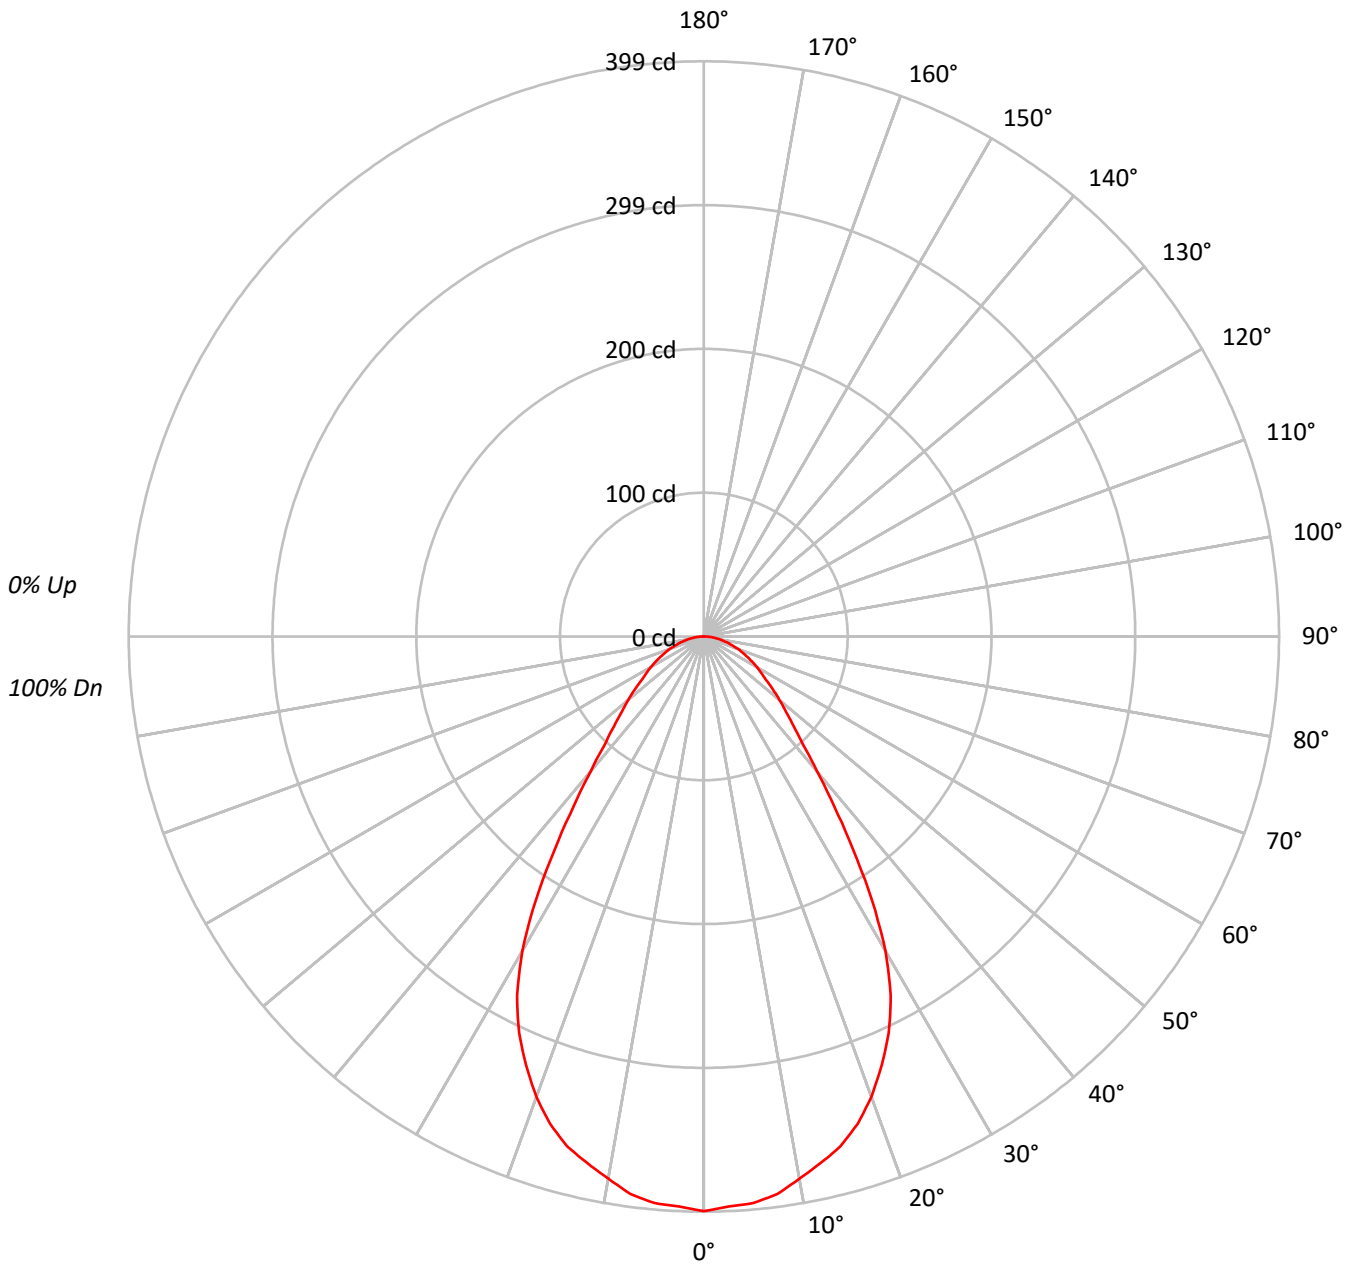



TEST NUMBER: P581094

CATALOG NUMBER: HC405D010-HM40525935-41PSMDW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89			89
2	103	97	91	87	101	95	90	86	92	88	84	89	85	82	86	83	80	78			78
3	96	88	81	76	94	86	80	75	84	78	74	81	77	73	79	75	72	70			70
4	90	80	73	68	88	79	72	67	77	71	66	74	69	65	72	68	65	63			63
5	84	74	66	61	82	72	66	60	71	64	60	69	63	59	67	62	59	57			57
6	79	68	60	55	77	67	60	55	65	59	54	64	58	54	62	57	53	52			52
7	74	63	55	50	73	62	55	50	61	54	50	59	54	49	58	53	49	47			47
8	70	58	51	46	68	58	51	46	56	50	46	55	50	45	54	49	45	44			44
9	66	54	47	42	65	54	47	42	53	47	42	52	46	42	51	46	42	40			40
10	62	51	44	39	61	50	44	39	49	43	39	49	43	39	48	43	39	37			37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	49166
5°	48846
10°	47820
15°	46763
20°	44590
25°	41292
30°	35906
35°	27119
40°	19644
45°	15368
50°	13125
55°	11354
60°	10460
65°	9573
70°	8980
75°	8245
80°	7671
85°	7359



TEST NUMBER: P581094

CATALOG NUMBER: HC405D010-HM40525935-41PSMDW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	37.3	6.6
10°-20°	102.6	18.1
20°-30°	137.9	24.4
30°-40°	113.4	20.0
40°-50°	69.6	12.3
50°-60°	48.2	8.5
60°-70°	32.9	5.8
70°-80°	18.3	3.2
80°-90°	5.9	1.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	277.8	49.1
0°-40°	391.2	69.1
0°-60°	509.0	89.9
0°-90°	566.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	566.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	399	
5°	394	37
15°	366	103
25°	303	138
35°	180	113
45°	88	70
55°	53	48
65°	33	33
75°	17	18
85°	5	6
90°	0	



TEST NUMBER: P581094

CATALOG NUMBER: HC405D010-HM40525935-41PSMDW

CANDELA DISTRIBUTION (FULL):

	0°
0°	398.6
2.5°	395.8
5°	394.5
7.5°	390.2
10°	381.8
12.5°	374.2
15°	366.2
17.5°	354.6
20°	339.7
22.5°	322.1
25°	303.4
27.5°	280.6
30°	252.1
32.5°	217.2
35°	180.1
37.5°	148.1
40°	122.0
42.5°	102.0
45°	88.1
47.5°	77.2
50°	68.4
52.5°	60.4
55°	52.8
57.5°	47.2
60°	42.4
62.5°	37.6
65°	32.8
67.5°	28.8
70°	24.9
72.5°	20.8
75°	17.3
77.5°	13.6
80°	10.8
82.5°	8.1
85°	5.2
87.5°	2.8
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)