

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581123

Luminaire Tested: **HC455D010-HM44560827-41WDH**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P581123
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-8)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC455D010-HM44560827-41WDH
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4715.1 lumens
Efficiency: N/A
Efficacy: 90.7 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.11
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 52
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581123

CATALOG NUMBER: HC455D010-HM44560827-41WDH

Luminous Intensity Polar Plot

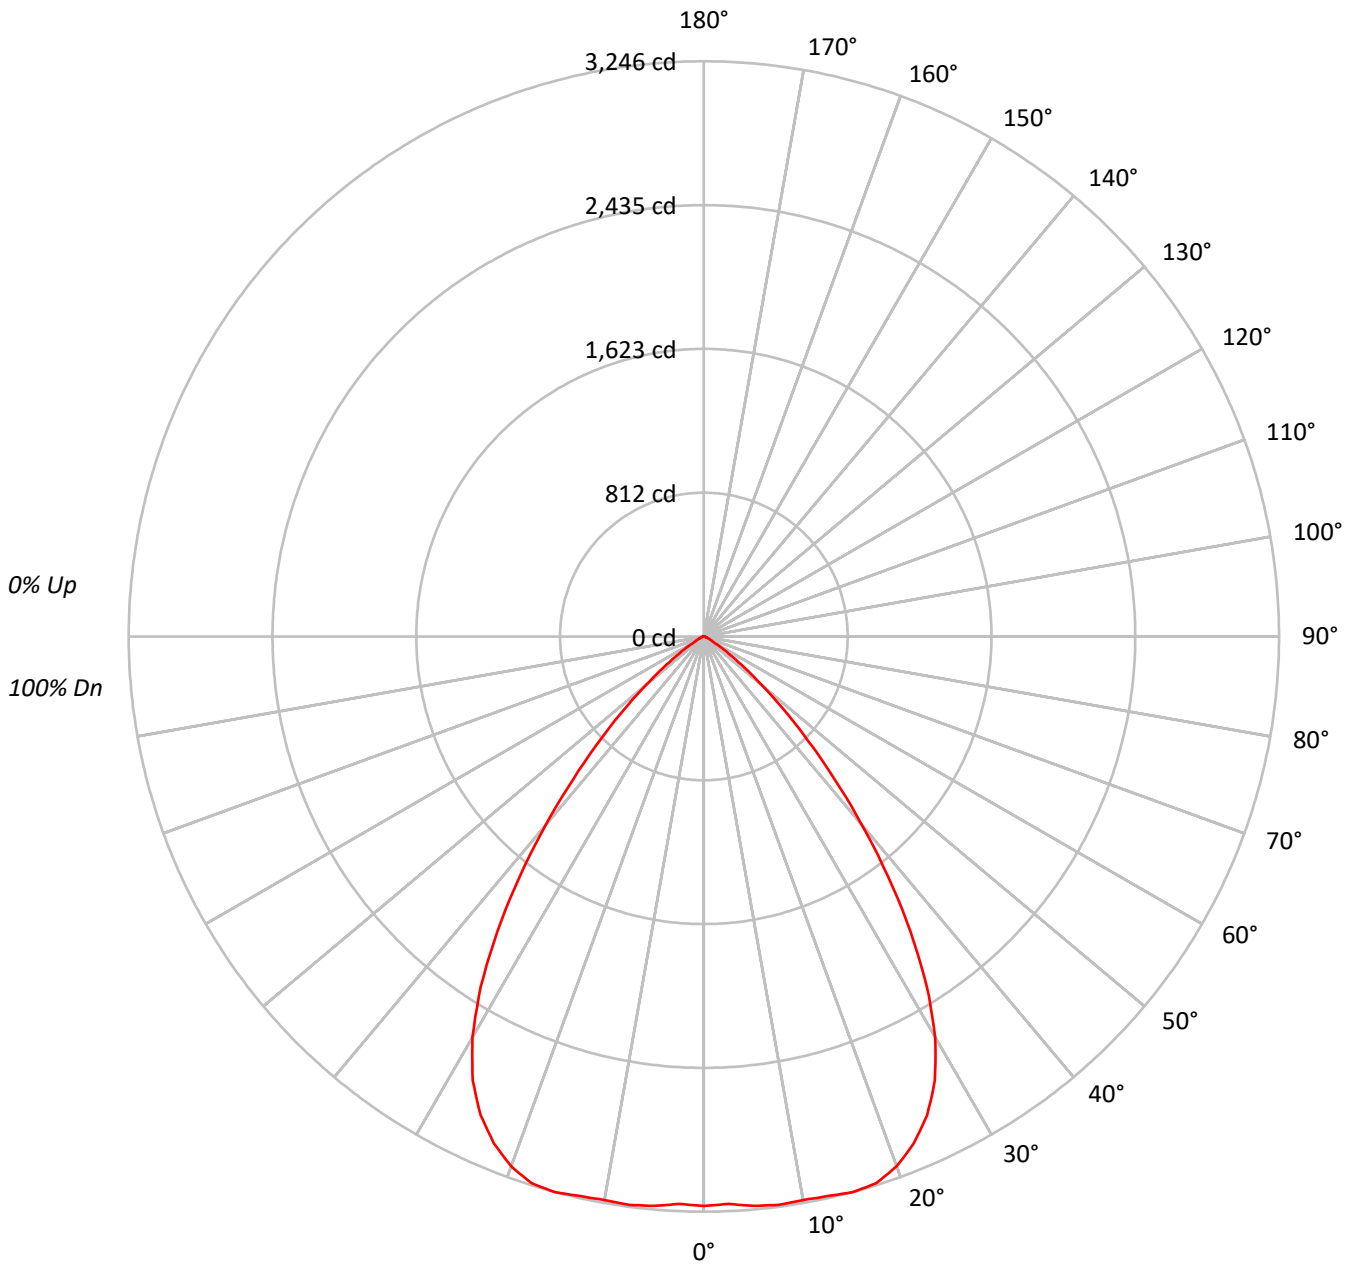



TEST NUMBER: P581123

CATALOG NUMBER: HC455D010-HM44560827-41WDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	108	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	86	84	84	84	84
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	81	78	76	76	76	76
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69	69	69	69
5	88	79	72	67	86	78	72	67	76	70	66	74	69	66	72	68	65	63	63	63	63
6	83	73	66	61	81	72	66	61	70	65	61	69	64	60	68	63	60	58	58	58	58
7	78	68	61	56	77	67	60	56	65	60	55	64	59	55	63	58	55	53	53	53	53
8	74	63	56	51	72	62	56	51	61	55	51	60	55	51	59	54	51	49	49	49	49
9	69	59	52	47	68	58	52	47	57	51	47	56	51	47	55	50	47	45	45	45	45
10	66	55	48	44	65	54	48	44	53	48	44	53	47	44	52	47	43	42	42	42	42

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	396433
5°	399408
10°	404415
15°	414568
20°	417609
25°	405664
30°	371949
35°	306033
40°	223072
45°	144800
50°	81631
55°	38751
60°	15295
65°	9485
70°	6419
75°	4241
80°	2060
85°	4104



TEST NUMBER: P581123

CATALOG NUMBER: HC455D010-HM44560827-41WDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	308.0	6.5
10°-20°	915.3	19.4
20°-30°	1357.6	28.8
30°-40°	1253.9	26.6
40°-50°	654.7	13.9
50°-60°	179.4	3.8
60°-70°	34.5	0.7
70°-80°	9.7	0.2
80°-90°	2.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2580.9	54.7
0°-40°	3834.7	81.3
0°-60°	4668.8	99.0
0°-90°	4715.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4715.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3214	
5°	3226	308
15°	3246	915
25°	2981	1358
35°	2032	1254
45°	830	655
55°	180	179
65°	32	35
75°	9	10
85°	3	2
90°	0	



TEST NUMBER: P581123

CATALOG NUMBER: HC455D010-HM44560827-41WDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	3214.0
2.5°	3205.2
5°	3225.8
7.5°	3234.7
10°	3228.9
12.5°	3234.7
15°	3246.5
17.5°	3234.7
20°	3181.5
22.5°	3095.9
25°	2980.7
27.5°	2824.1
30°	2611.5
32.5°	2342.6
35°	2032.4
37.5°	1707.4
40°	1385.4
42.5°	1090.0
45°	830.1
47.5°	608.5
50°	425.4
52.5°	283.6
55°	180.2
57.5°	106.3
60°	62.0
62.5°	44.3
65°	32.5
67.5°	23.6
70°	17.8
72.5°	11.8
75°	8.9
77.5°	6.0
80°	2.9
82.5°	2.9
85°	2.9
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)