

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581127

Luminaire Tested: **HC455D010-HM44560827-41WDC**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P581127
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-7)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC455D010-HM44560827-41WDC
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, SPECULAR TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 2700K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5010.4 lumens
Efficiency: N/A
Efficacy: 96.4 lumens/watt
Spacing Criteria (0/90/45): 1.25 / 1.25 / 1.11
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 52
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581127

CATALOG NUMBER: HC455D010-HM44560827-41WDC

Luminous Intensity Polar Plot

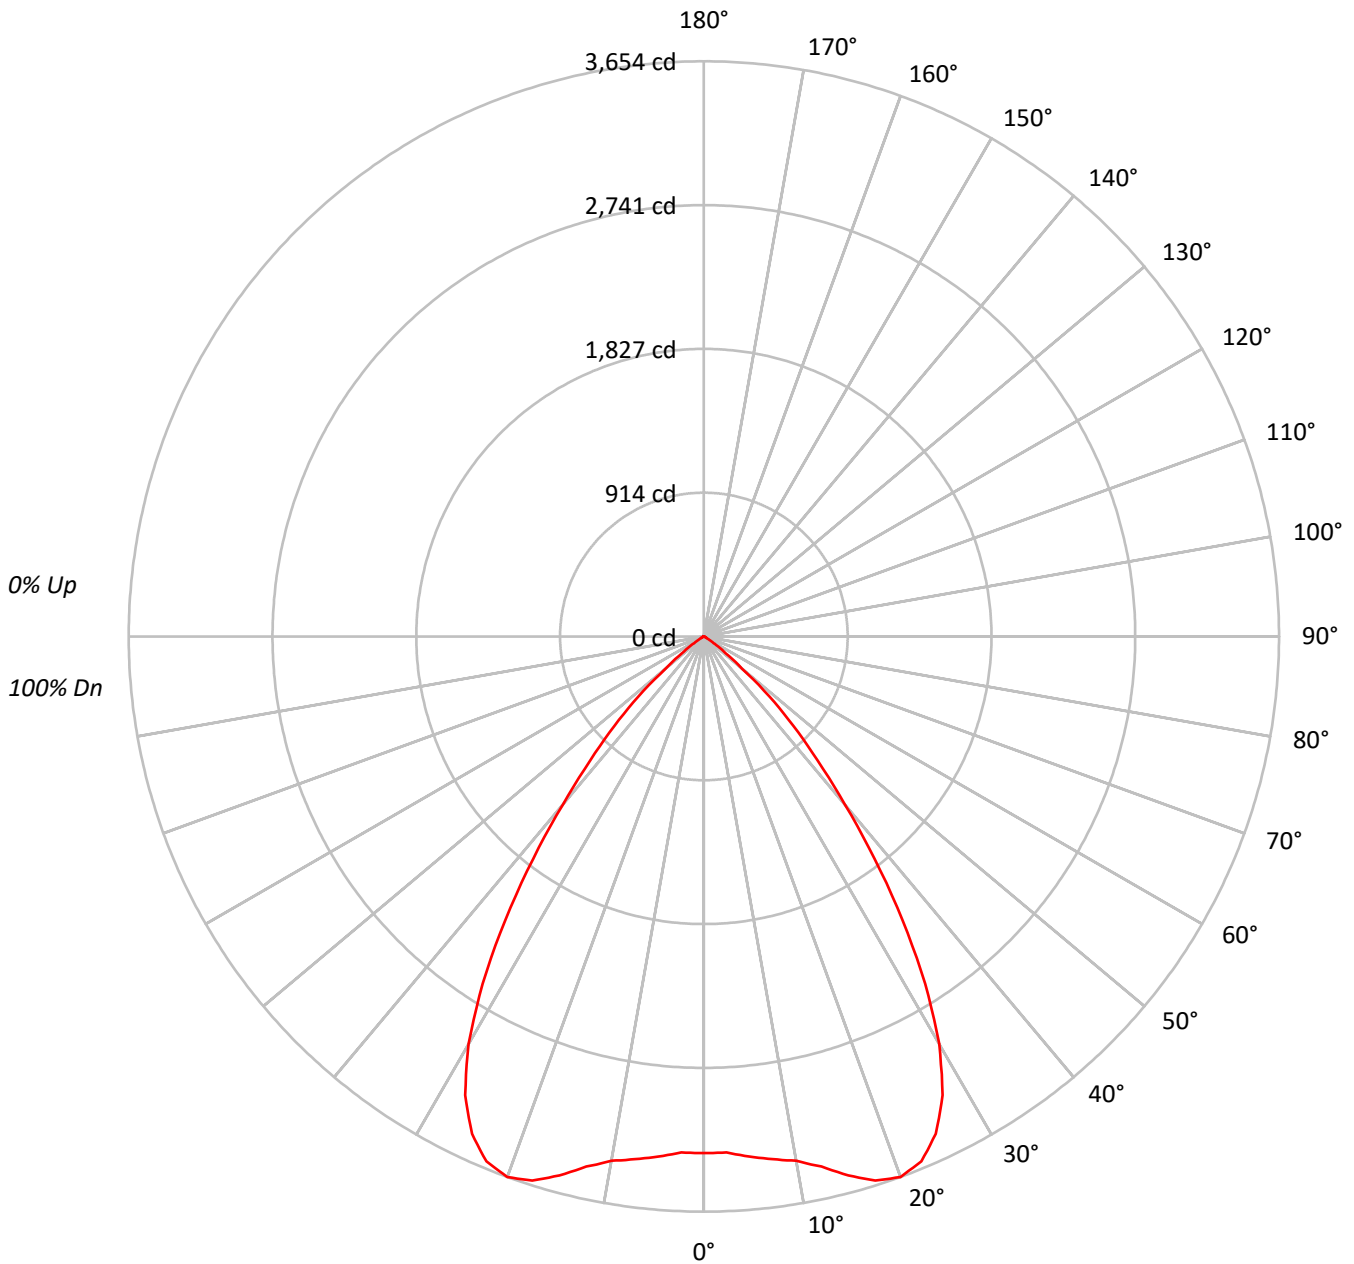



TEST NUMBER: P581127

CATALOG NUMBER: HC455D010-HM44560827-41WDC

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92	92	92	92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85	85	85	85
3	101	93	88	84	98	92	87	83	89	85	82	87	83	80	85	82	79	77	77	77	77
4	95	86	80	76	93	85	79	75	83	78	74	81	77	73	79	75	72	71	71	71	71
5	89	80	73	69	87	79	73	68	77	72	68	75	71	67	74	70	66	65	65	65	65
6	84	74	67	63	82	73	67	62	72	66	62	70	65	62	69	65	61	60	60	60	60
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55	55	55	55
8	75	64	57	53	73	63	57	53	62	57	53	61	56	52	60	56	52	51	51	51	51
9	70	60	53	49	69	59	53	49	58	53	49	57	52	48	56	52	48	47	47	47	47
10	67	56	50	45	66	55	49	45	55	49	45	54	49	45	53	48	45	43	43	43	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	404759
5°	410700
10°	423590
15°	452609
20°	479591
25°	474352
30°	425729
35°	331345
40°	224473
45°	140143
50°	60638
55°	20322
60°	5107
65°	3444
70°	2164
75°	1382
80°	2060
85°	0



TEST NUMBER: P581127

CATALOG NUMBER: HC455D010-HM44560827-41WDC

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	318.6	6.4
10°-20°	1006.1	20.1
20°-30°	1576.5	31.5
30°-40°	1360.6	27.2
40°-50°	625.7	12.5
50°-60°	106.2	2.1
60°-70°	12.0	0.2
70°-80°	4.3	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2901.2	57.9
0°-40°	4261.8	85.1
0°-60°	4993.8	99.7
0°-90°	5010.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5010.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3282	
5°	3317	319
15°	3544	1006
25°	3485	1576
35°	2200	1361
45°	803	626
55°	94	106
65°	12	12
75°	3	4
85°	0	0
90°	0	



TEST NUMBER: P581127

CATALOG NUMBER: HC455D010-HM44560827-41WDC

CANDELA DISTRIBUTION (FULL):

	0°
0°	3281.5
2.5°	3281.5
5°	3317.0
7.5°	3349.5
10°	3382.0
12.5°	3449.8
15°	3544.4
17.5°	3624.1
20°	3653.7
22.5°	3609.3
25°	3485.4
27.5°	3284.4
30°	2989.1
32.5°	2617.0
35°	2200.5
37.5°	1781.1
40°	1394.1
42.5°	1066.3
45°	803.4
47.5°	564.2
50°	316.0
52.5°	174.3
55°	94.5
57.5°	47.2
60°	20.7
62.5°	14.7
65°	11.8
67.5°	8.9
70°	6.0
72.5°	6.0
75°	2.9
77.5°	2.9
80°	2.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)