

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581232

Luminaire Tested: **HC4R55D010-HM44560935-42RMDC**

Issue Date: 9/23/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P581232  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-13)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/23/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC4R55D010-HM44560935-42RMDC  
Description: HALO COMMERCIAL 4" ROUND, RETROFIT FRAME, WITH 4" MEDIUM DISTRIBUTION, SPECULAR TRIM  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4487.3 lumens  
Efficiency: N/A  
Efficacy: 86.3 lumens/watt  
Spacing Criteria (0/90/45): 1.02 / 1.02 / 0.96  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 52  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P581232

CATALOG NUMBER: HC4R55D010-HM44560935-42RMDC

### Luminous Intensity Polar Plot

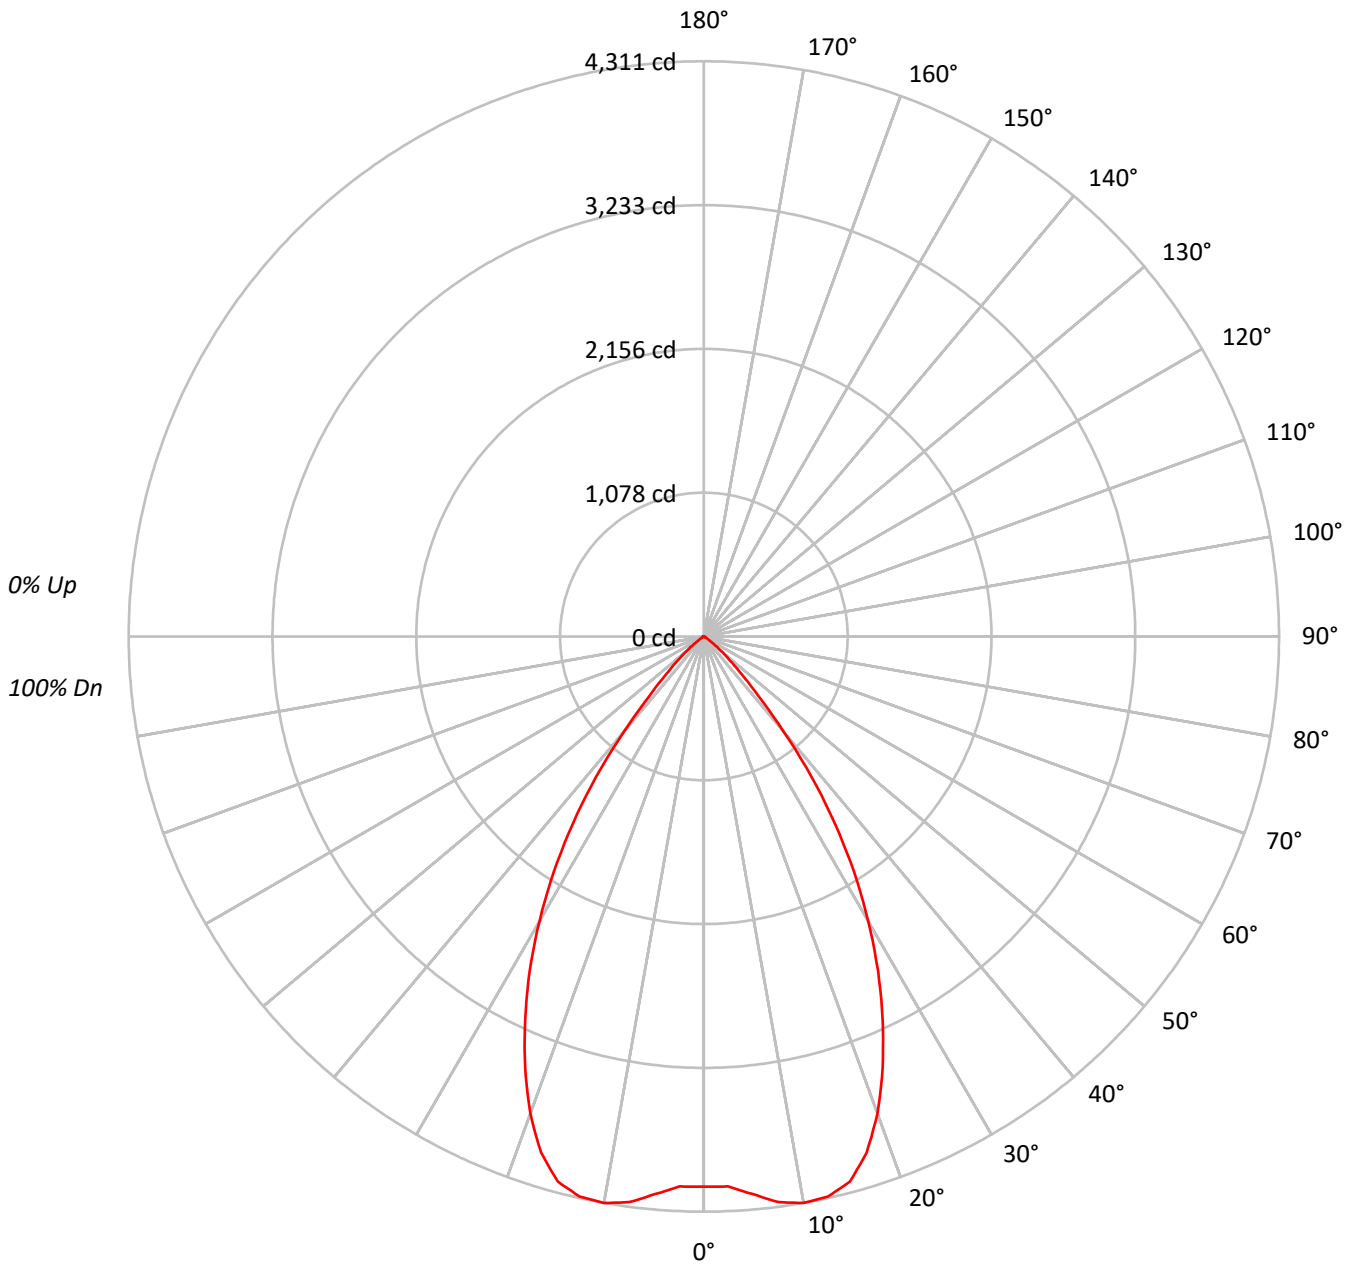



TEST NUMBER: P581232

CATALOG NUMBER: HC4R55D010-HM44560935-42RMDC

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86			
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80			
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	74			
5	92	83	77	73	90	82	76	72	80	75	72	78	74	71	77	73	70	69			
6	87	78	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64			
7	82	73	66	62	81	72	66	62	71	65	62	69	65	61	68	64	61	60			
8	78	68	62	58	77	68	62	58	67	61	57	65	61	57	65	60	57	56			
9	74	64	58	54	73	64	58	54	63	57	54	62	57	54	61	57	53	52			
10	70	61	55	51	69	60	54	51	59	54	50	58	54	50	58	53	50	49			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	508517
5°	519411
10°	539908
15°	540119
20°	499372
25°	431536
30°	351069
35°	257894
40°	149069
45°	69653
50°	32199
55°	11204
60°	3577
65°	2539
70°	2056
75°	1382
80°	0
85°	0



TEST NUMBER: P581232

CATALOG NUMBER: HC4R55D010-HM44560935-42RMDC

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	404.7	9.0
10°-20°	1172.2	26.1
20°-30°	1443.6	32.2
30°-40°	1053.9	23.5
40°-50°	343.5	7.7
50°-60°	57.4	1.3
60°-70°	8.9	0.2
70°-80°	3.0	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3020.5	67.3
0°-40°	4074.5	90.8
0°-60°	4475.4	99.7
0°-90°	4487.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4487.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4123	
5°	4195	405
15°	4230	1172
25°	3171	1444
35°	1713	1054
45°	399	343
55°	52	57
65°	9	9
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P581232

CATALOG NUMBER: HC4R55D010-HM44560935-42RMDC

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4122.7
2.5°	4125.5
5°	4195.0
7.5°	4276.0
10°	4310.7
12.5°	4299.1
15°	4229.7
17.5°	4056.1
20°	3804.4
22.5°	3500.7
25°	3170.8
27.5°	2826.6
30°	2464.9
32.5°	2094.6
35°	1712.7
37.5°	1328.0
40°	925.8
42.5°	604.7
45°	399.3
47.5°	263.2
50°	167.8
52.5°	98.3
55°	52.1
57.5°	20.2
60°	14.5
62.5°	11.6
65°	8.7
67.5°	5.7
70°	5.7
72.5°	2.9
75°	2.9
77.5°	2.9
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)