

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581284

Luminaire Tested: **HC460D010-HM44560830-41NDH**

Issue Date: 9/9/2021

**Test Information**

Test Method: LM-41-14  
Report Number: P581284  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-2)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 9/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: HALO COMMERCIAL  
Catalog Number: HC460D010-HM44560830-41NDH  
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" NARROW DISTRIBUTION, HAZE TRIM  
Light Source: (1) HIGH LUMEN LED 80CRI / 3000K CCT  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4734.4 lumens  
Efficiency: N/A  
Efficacy: 86.1 lumens/watt  
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.91  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct


Input Watts (W): 55  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P581284

CATALOG NUMBER: HC460D010-HM44560830-41NDH

### Luminous Intensity Polar Plot

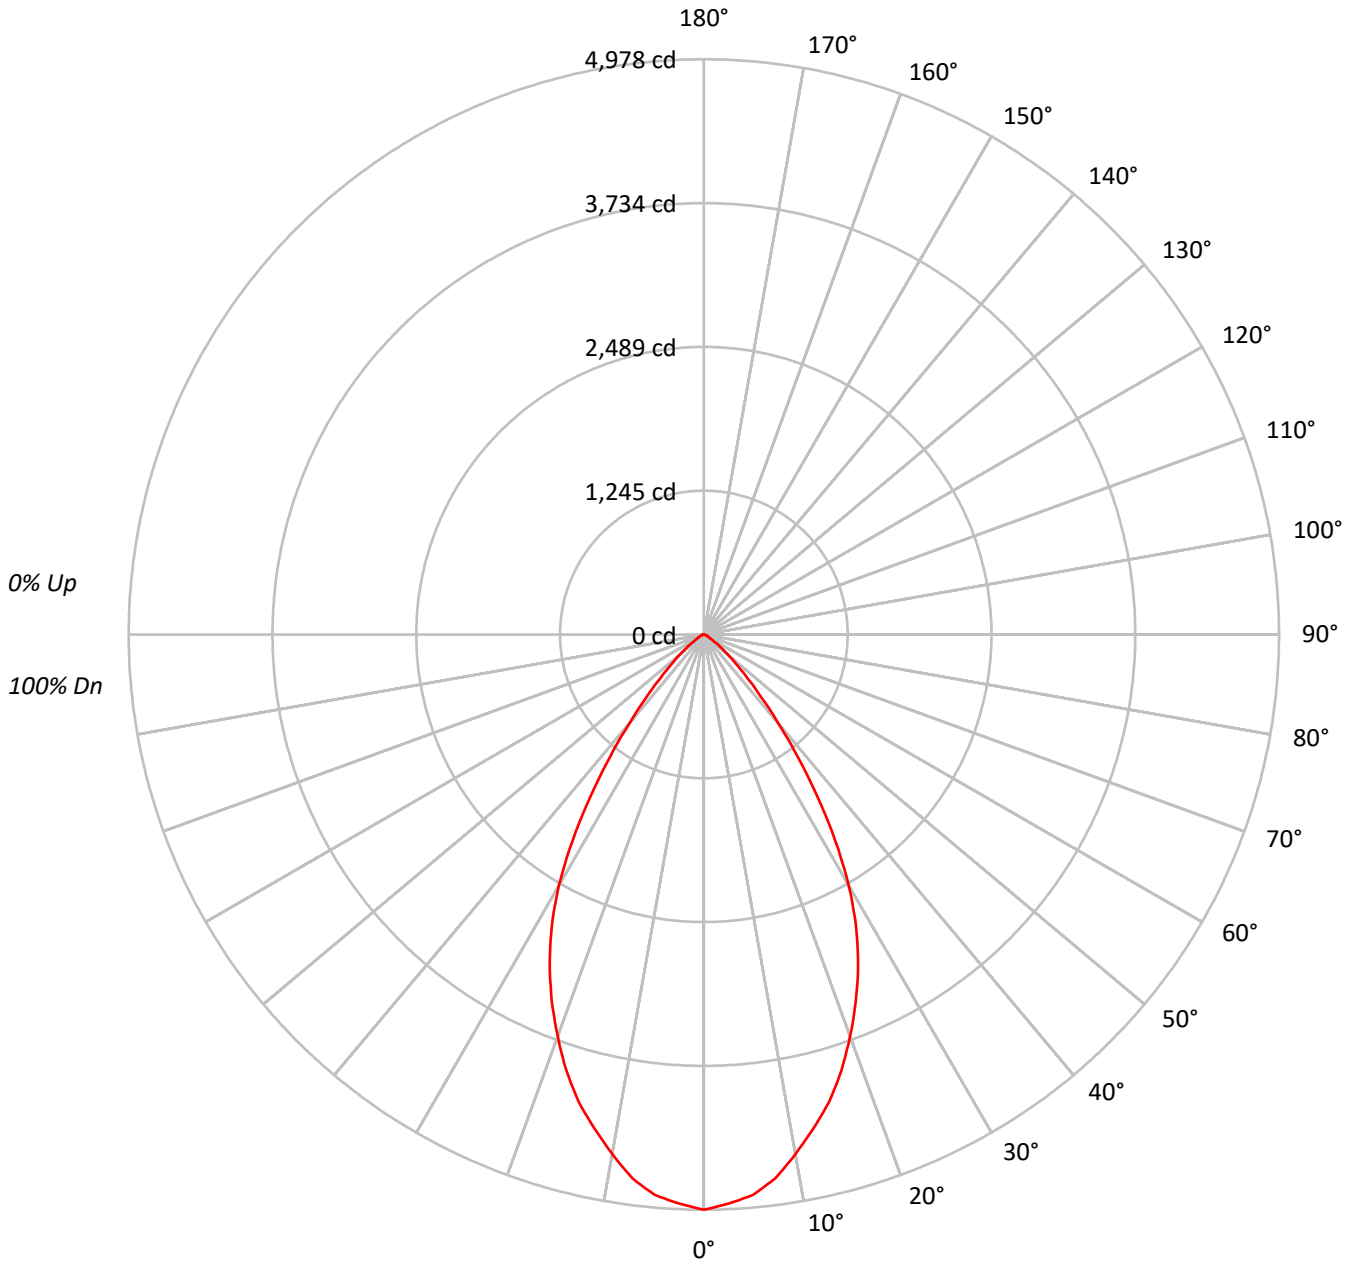



TEST NUMBER: P581284

CATALOG NUMBER: HC460D010-HM44560830-41NDH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86	86	86	86
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	81	79	79	79	79
4	96	88	82	78	94	87	81	77	85	80	76	82	79	75	81	77	74	73	73	73	73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67	67	67	67
6	86	76	70	66	84	76	70	65	74	69	65	73	68	64	71	67	64	63	63	63	63
7	81	72	65	61	80	71	65	61	70	64	60	68	64	60	67	63	60	58	58	58	58
8	77	67	61	57	76	67	61	56	65	60	56	64	59	56	63	59	56	54	54	54	54
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	60	55	52	51	51	51	51
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48	48	48	48

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	614064
5°	602913
10°	571859
15°	534718
20°	485629
25°	429726
30°	357450
35°	257743
40°	160871
45°	92801
50°	52348
55°	24945
60°	14308
65°	10974
70°	7357
75°	4909
80°	4830
85°	4812



TEST NUMBER: P581284

CATALOG NUMBER: HC460D010-HM44560830-41NDH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	455.1	9.6
10°-20°	1168.1	24.7
20°-30°	1436.7	30.3
30°-40°	1066.9	22.5
40°-50°	433.8	9.2
50°-60°	120.1	2.5
60°-70°	37.4	0.8
70°-80°	12.6	0.3
80°-90°	3.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3059.9	64.6
0°-40°	4126.8	87.2
0°-60°	4680.7	98.9
0°-90°	4734.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4734.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4978	
5°	4869	455
15°	4187	1168
25°	3158	1437
35°	1712	1067
45°	532	434
55°	116	120
65°	38	37
75°	10	13
85°	3	4
90°	0	



TEST NUMBER: P581284

CATALOG NUMBER: HC460D010-HM44560830-41NDH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4978.4
2.5°	4930.7
5°	4869.4
7.5°	4746.5
10°	4565.8
12.5°	4378.2
15°	4187.4
17.5°	3958.8
20°	3699.7
22.5°	3437.1
25°	3157.5
27.5°	2854.1
30°	2509.7
32.5°	2117.5
35°	1711.7
37.5°	1329.8
40°	999.1
42.5°	729.7
45°	532.0
47.5°	381.9
50°	272.8
52.5°	187.6
55°	116.0
57.5°	75.0
60°	58.0
62.5°	47.7
65°	37.6
67.5°	27.3
70°	20.4
72.5°	17.0
75°	10.3
77.5°	6.8
80°	6.8
82.5°	3.4
85°	3.4
87.5°	3.4
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P







— 0°-180°







(END OF REPORT)