

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581321

Luminaire Tested: **HC460D010-HM44560840-41WDH**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P581321
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-8)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC460D010-HM44560840-41WDH
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, HAZE TRIM
Light Source: (1) HIGH LUMEN LED 80CRI / 4000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6243.1 lumens
Efficiency: N/A
Efficacy: 113.5 lumens/watt
Spacing Criteria (0/90/45): 1.19 / 1.19 / 1.1
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 55
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581321

CATALOG NUMBER: HC460D010-HM44560840-41WDH

Luminous Intensity Polar Plot

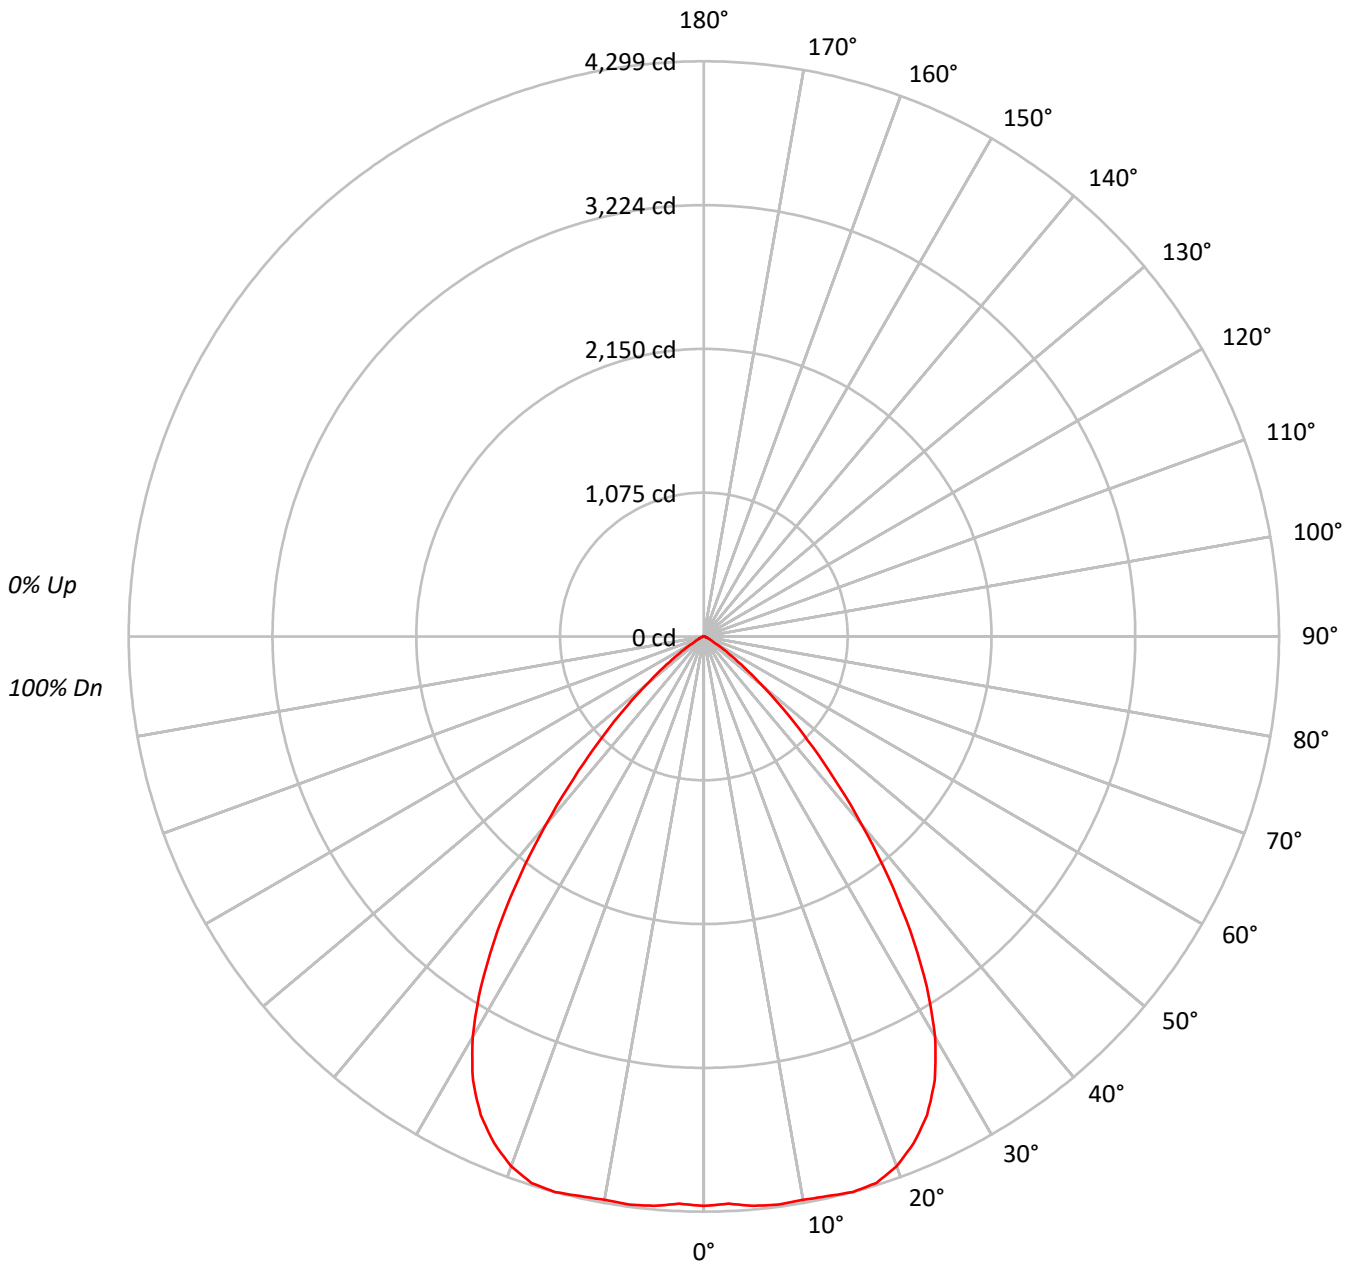



TEST NUMBER: P581321

CATALOG NUMBER: HC460D010-HM44560840-41WDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	108	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	88	86	84	84	84	84
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	81	78	76	76	76	76
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69	69	69	69
5	88	79	72	67	86	78	72	67	76	70	66	74	69	66	72	68	65	63	63	63	63
6	83	73	66	61	81	72	66	61	70	65	61	69	64	60	68	63	60	58	58	58	58
7	78	68	61	56	77	67	60	56	65	60	55	64	59	55	63	58	55	53	53	53	53
8	74	63	56	51	72	62	56	51	61	55	51	60	55	51	59	54	51	49	49	49	49
9	69	59	52	47	68	58	52	47	57	51	47	56	51	47	55	50	47	45	45	45	45
10	66	55	48	44	65	54	48	44	53	48	44	53	47	44	52	47	43	42	42	42	42

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	524910
5°	528859
10°	535450
15°	548917
20°	552940
25°	537106
30°	492471
35°	405218
40°	295384
45°	191724
50°	108073
55°	51310
60°	20253
65°	12550
70°	8475
75°	5576
80°	2770
85°	5519



TEST NUMBER: P581321

CATALOG NUMBER: HC460D010-HM44560840-41WDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	407.8	6.5
10°-20°	1211.9	19.4
20°-30°	1797.5	28.8
30°-40°	1660.2	26.6
40°-50°	866.9	13.9
50°-60°	237.6	3.8
60°-70°	45.7	0.7
70°-80°	12.9	0.2
80°-90°	2.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3417.2	54.7
0°-40°	5077.4	81.3
0°-60°	6181.9	99.0
0°-90°	6243.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6243.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4256	
5°	4271	408
15°	4299	1212
25°	3946	1797
35°	2691	1660
45°	1099	867
55°	239	238
65°	43	46
75°	12	13
85°	4	3
90°	0	



TEST NUMBER: P581321

CATALOG NUMBER: HC460D010-HM44560840-41WDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	4255.6
2.5°	4243.9
5°	4271.3
7.5°	4283.0
10°	4275.1
12.5°	4283.0
15°	4298.6
17.5°	4283.0
20°	4212.5
22.5°	4099.2
25°	3946.5
27.5°	3739.3
30°	3457.7
32.5°	3101.8
35°	2691.1
37.5°	2260.7
40°	1834.5
42.5°	1443.3
45°	1099.1
47.5°	805.7
50°	563.2
52.5°	375.5
55°	238.6
57.5°	140.8
60°	82.1
62.5°	58.7
65°	43.0
67.5°	31.2
70°	23.5
72.5°	15.7
75°	11.7
77.5°	7.8
80°	3.9
82.5°	3.9
85°	3.9
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)