

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: HALO COMMERCIAL

Report Number: P581353

Luminaire Tested: **HC460D010-HM44560930-41WDBB**

Issue Date: 9/9/2021

Test Information

Test Method: LM-41-14
Report Number: P581353
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-2106-266-11)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 9/9/2021
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: HALO COMMERCIAL
Catalog Number: HC460D010-HM44560930-41WDBB
Description: HALO COMMERCIAL 4" ROUND, NEW CONSTRUCTION FRAME, WITH 4" WIDE DISTRIBUTION, BLACK BAFFLE TRIM
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3750.6 lumens
Efficiency: N/A
Efficacy: 68.2 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.03
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct


Input Watts (W): 55
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P581353

CATALOG NUMBER: HC460D010-HM44560930-41WDBB

Luminous Intensity Polar Plot

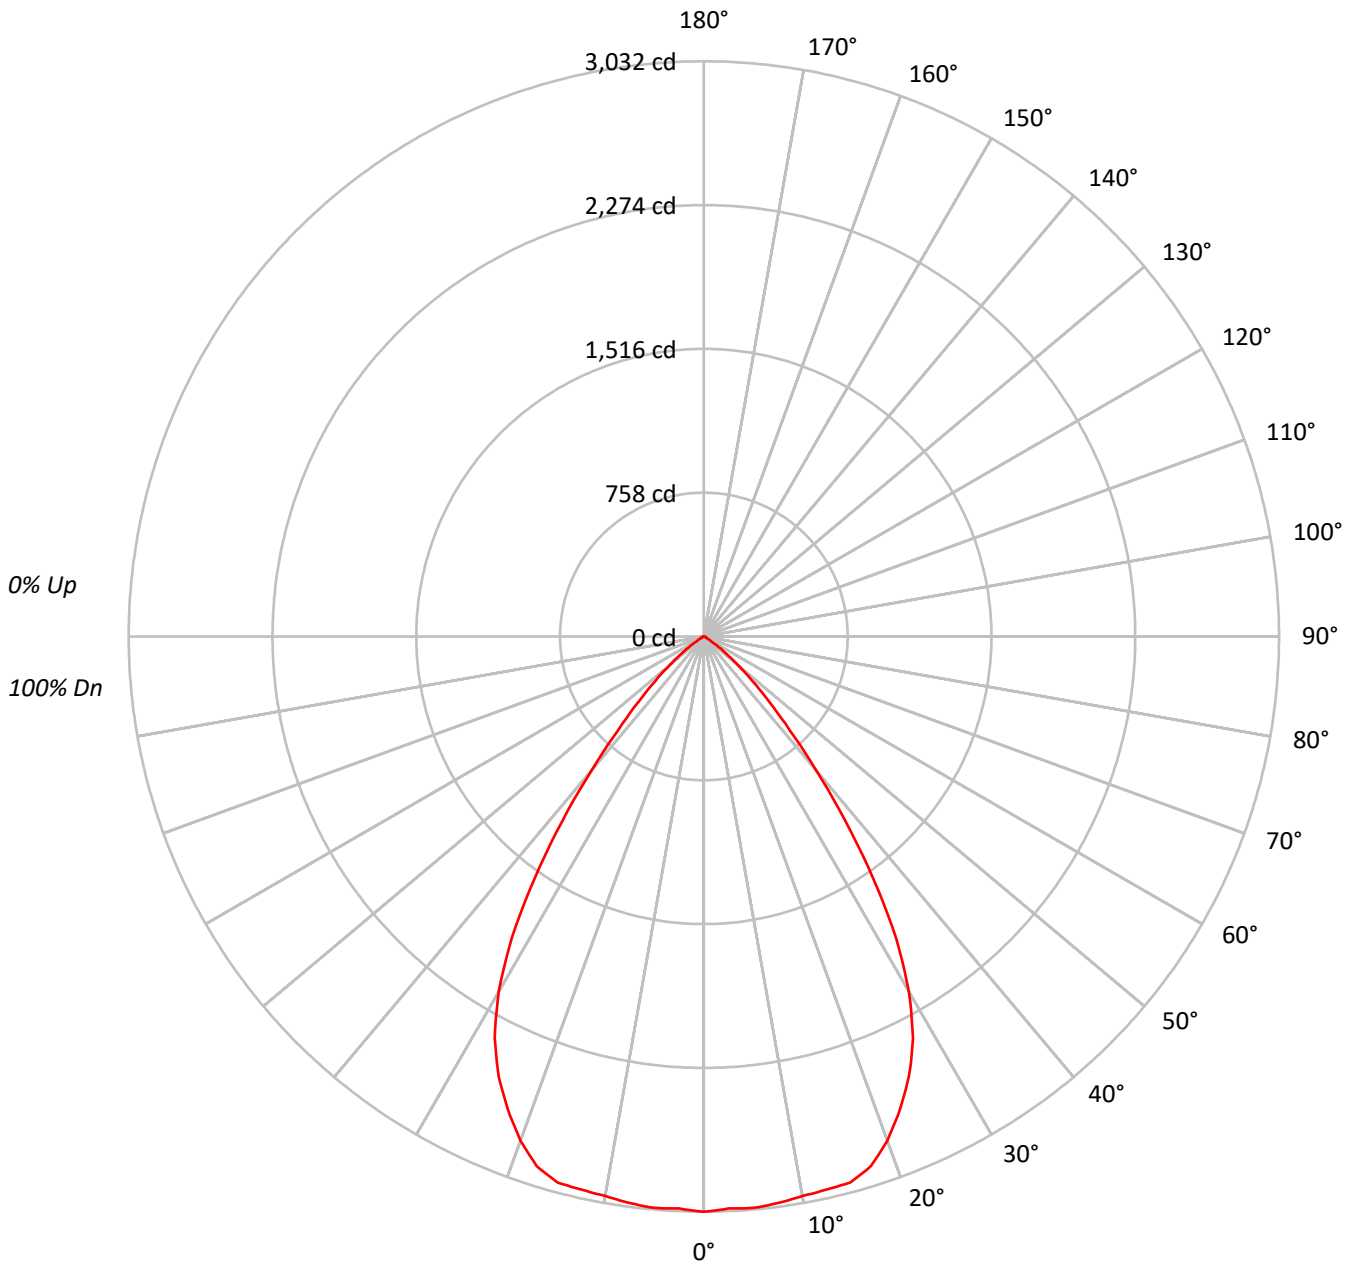



TEST NUMBER: P581353

CATALOG NUMBER: HC460D010-HM44560930-41WDBB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93	93	93	93
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85	85	85	85
3	101	94	89	84	99	93	88	84	90	86	82	87	84	81	85	82	80	78	78	78	78
4	95	87	81	77	93	86	80	76	84	79	75	82	78	74	80	76	73	72	72	72	72
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66	66	66	66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61	61	61	61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56	56	56	56
8	76	65	59	55	74	65	59	54	64	58	54	63	58	54	62	57	54	52	52	52	52
9	72	61	55	51	71	61	55	51	60	54	50	59	54	50	58	53	50	49	49	49	49
10	68	58	51	47	67	57	51	47	56	51	47	55	50	47	55	50	47	45	45	45	45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	374046
5°	374397
10°	375119
15°	380588
20°	371103
25°	348190
30°	307985
35°	234193
40°	147555
45°	84707
50°	44941
55°	18645
60°	4983
65°	4203
70°	3138
75°	2764
80°	2060
85°	4104



TEST NUMBER: P581353

CATALOG NUMBER: HC460D010-HM44560930-41WDBB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	287.6	7.7
10°-20°	834.5	22.3
20°-30°	1164.7	31.1
30°-40°	958.5	25.6
40°-50°	394.8	10.5
50°-60°	88.9	2.4
60°-70°	14.3	0.4
70°-80°	5.3	0.1
80°-90°	2.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2286.8	61.0
0°-40°	3245.3	86.5
0°-60°	3729.0	99.4
0°-90°	3750.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3750.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3032	
5°	3024	288
15°	2980	835
25°	2558	1165
35°	1555	958
45°	486	395
55°	87	89
65°	14	14
75°	6	5
85°	3	2
90°	0	



TEST NUMBER: P581353

CATALOG NUMBER: HC460D010-HM44560930-41WDBB

CANDELA DISTRIBUTION (FULL):

	0°
0°	3032.5
2.5°	3018.1
5°	3023.8
7.5°	3012.2
10°	2995.0
12.5°	2986.3
15°	2980.4
17.5°	2928.4
20°	2827.2
22.5°	2700.0
25°	2558.4
27.5°	2387.9
30°	2162.4
32.5°	1884.8
35°	1555.3
37.5°	1222.9
40°	916.4
42.5°	667.8
45°	485.6
47.5°	346.9
50°	234.2
52.5°	147.4
55°	86.7
57.5°	43.3
60°	20.2
62.5°	17.4
65°	14.4
67.5°	11.6
70°	8.7
72.5°	5.8
75°	5.8
77.5°	2.9
80°	2.9
82.5°	2.9
85°	2.9
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-HRDQ47P





— 0°-180°







(END OF REPORT)